

XP Series Flip-Chip COB UHD Display

A Cost-Effective Solution for General Display Applications



- ◆ Effective Cost Management
- ◆ Well-balanced Performance
- ◆ Superior Lifespan
- ◆ Full Front-maintenance Design

Cost Reduction & Efficiency · Practical & Economical

Strong Both Inside and Out

Through fine-tuned process optimization, achieving improved efficiency and reduced costs.

Integrate the supply chain to ensure both quality and cost effectiveness of raw materials.

Long lifespan and low maintenance enhance overall value to users.



Lifecycle Optimization

Low power consumption, efficient heat dissipation, significant energy-saving advantages that reduce user operating costs.

Multi-Scene adaptability, compatible with mainstream devices, and support customized solutions.

Full front access design for easy operation, reducing maintenance time and labor costs.

Exquisite Craftsmanship · Boundless Reliability

Technological Leadership

Flip-Chip COB Packaging Technology.

Superior Quality and Enduring Durability.

IP65 Protection Rating, rigorously tested against extreme temperatures, humidity, and vibration for reliable operation in complex environments.

Precision Control

High-quality driver IC ensures efficient and lag-free image processing.

Precise integration of critical components with accurate color and brightness control.

High-precision seamless splicing technology enables large-screen splicing of any spatial size.



Multiple Markets · Broad Applications

Emergency command, dispatch & operation control, security monitoring, high-level consultation, smart City, urban brain, TV/radio studio broadcasting and other professional scenarios.

Government, emergency management, digital twin, public prosecution and justice, large-scale transportation, large-scale energy, military, enterprises, radio and television, finance, telecommunications, tobacco, and various other industries and markets at various levels.


Ultra-Clear Visuals · Healthy & Comfort

Lifelike Visual Reproduction

High resolution, high refresh rate, high brightness, and high contrast.

Rich and vibrant colors that faithfully reproduce a true-to-life visual experience.

Ultra-wide viewing angle with consistent colors from any viewing angle.

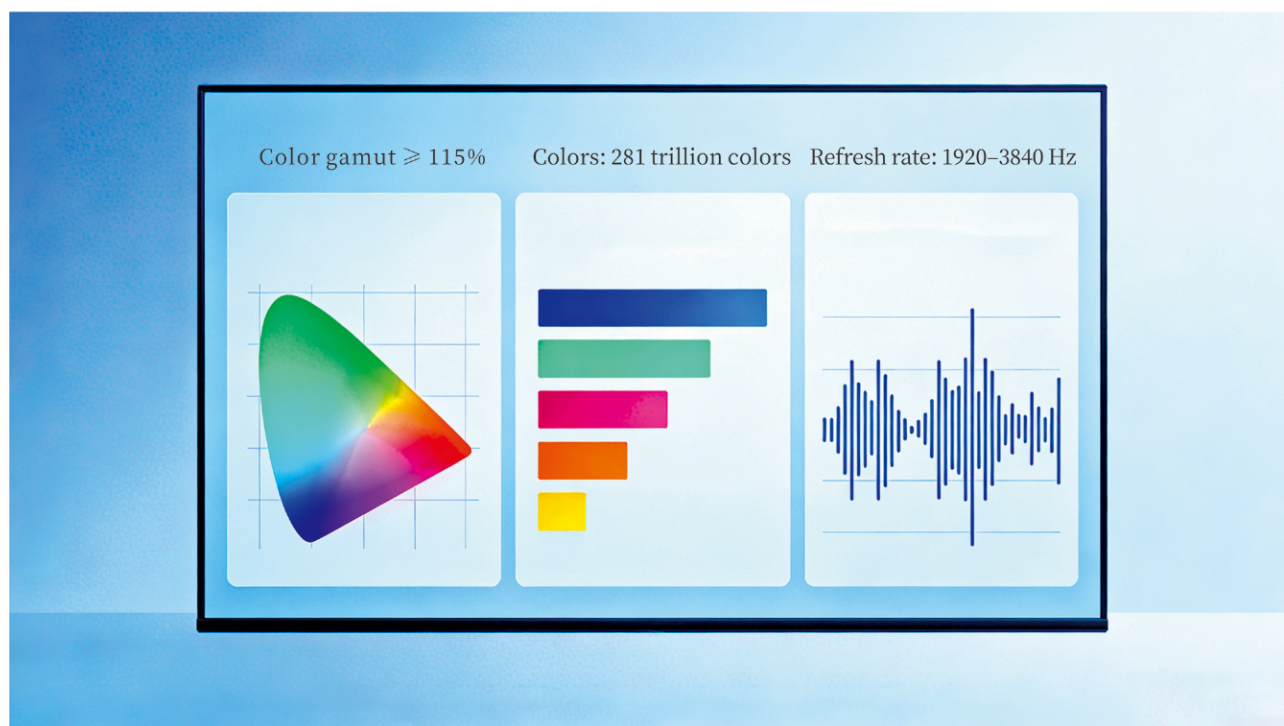

Thoughtful Eye Care

Surface light source design for a healthier eye viewing experience.

Avoid high-frequency blue light that may be harmful to the human eyes, ensuring comfort during long-term use.

Anti-glare surface technology further enhances overall user experience.

MCXP Series·Product Specifications

Model		MCXP009	MCXP012	MCXP015	MCXP018
Specs.					
LED	Pixel Composition	RGB			
	Packaging	Flip-Chip COB			
Module	Pixel Pitch _(mm)	0.93	1.25	1.56	1.875
	Pixel Density _(pixels/m²)	1137777	640000	409600	284444
	Size _(W×H) (mm)	150×168.75		300×168.75	
	Resolution _(W×H) (pixel)	160×180	120×135	192×108	160×90
	Driving Mode	Constant-Current PWM Driver			
Cabinet	Dimensions _(W×H×D) (mm)	600×337.5×33.65		600×337.5×33.45	
	Resolution _(W×H) (pixel)	640×360	480×270	384×216	320×180
	Display Area _(m²)	0.2025			
	Module Layout _(W×H)	4×2		2×2	
	Flatness _(mm)	≤0.1			
	Cabinet Weight _(with modules) (kg)	3.4±0.1		3.53±0.1	
	Module Interconnection Type	Rigid Interconnection			
	Maintenance	Front Maintenance			
	Material	Die-cast Aluminum			
	Ingress Protection	IP65			
Optical	Operating Brightness _(cd/m²)	0-800 Adjustable			
	Brightness Calibration	Support			
	Chroma Calibration	Support			
	Calibration Coefficient Storage	Receiving Card			
	Brightness Uniformity	≥98%			
	Refresh Rate _(Hz)	1920-3840 Adjustable			
	Color Temperature _(K)	6500 (3000-18000 Adjustable)			
	Color Gamut	≥115%			
	Color	281 Trillion Colors			
	Horizontal Viewing Angle _(°)	≥170			
	Vertical Viewing Angle _(°)	≥170			
	Static Contrast Ratio	≥10000:1			
	Dynamic Contrast Ratio	≥30000:1			
Electrical	Input Voltage	AC 100-240V (50/60Hz)			
	Max. Power Consumption _(W/m²)	≤300@800nit	≤320@800nit	≤300@800nit	≤300@800nit
	Avg. Power Consumption _(W/m²)	≤176@800nit	≤153@800nit	≤137@800nit	≤132@800nit
	Standby Power Consumption _(W/m²)	≤115	≤70	≤55	≤48
Image Processing	Grayscale _(bit)	14 (IC-Max. Support)			
	Brightness Adjustment Levels	256			
	Frame Rate _(Hz)	60			
Operation	Operation Temp./Humidity _(°C/RH)	-10~+40 / 10%~90% with no condensation			
	Storage Temp./Humidity _(°C/RH)	-20~+60 / 10%~90% with no condensation			
	Typical LED Chip Lifetime _(Hrs)	100000			

Note: specifications can be customized according to actual conditions.

Spectrum Display Inc. reserves the right of final interpretation of this document.

Leading Technology · World-Class Quality

SPECTRUM



Spectrum Display Inc.

Premium LED display distributor · Indoor, outdoor, rental, COB & MicroLED

517 N. Virginia Ave., Azusa, CA 91702 USA

Phone: 1.844.848.8899

info@spectrumdisplay.com

<https://www.spectrumdisplay.com>

Spectrum Display Inc. reserves the right to modify product design, specifications. Images are for reference only; please refer to the actual product.