

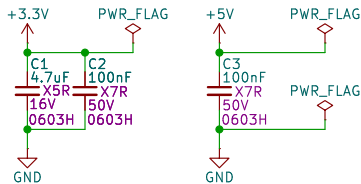


# GOLD GPIO ON LED DISPLAY

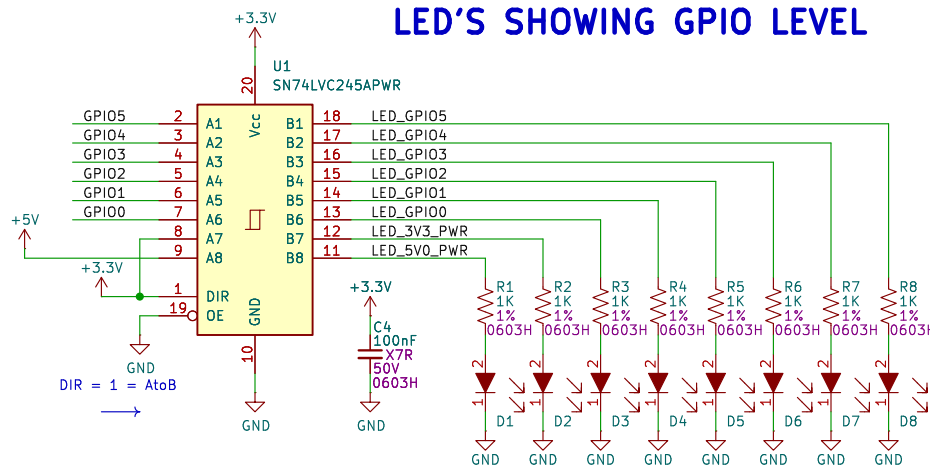

## GPIO CONNECTOR



## MOUNTING/TOOLING HOLES



LOG01



## PCB STACKUP NOTE

JLC04161H-7628 (STD) stackup gives :  
\* 50ohm trace impedance for 13mil trace.

This documentation describes Open Hardware and is licensed under the CERN OHL v. 1.2.  
You may redistribute and modify this documentation under the terms of the CERN OHL v.1.2. (<http://ohwr.org/cernohl>).  
This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING OF MERCHANTABILITY,  
SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1.2 for applicable conditions

GPIO On LED Display		
Title: GOLD		
Size: USLetter	Date: 2024-07-24	Rev: 0
KiCad E.D.A. 8.0.4	Drawn: Denno Wiggle	Id: 1/1