




GOLD GPIO ON LED DISPLAY

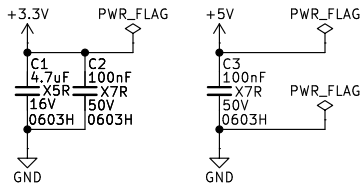

GPIO CONNECTOR



LED'S SHOWING GPIO LEVEL

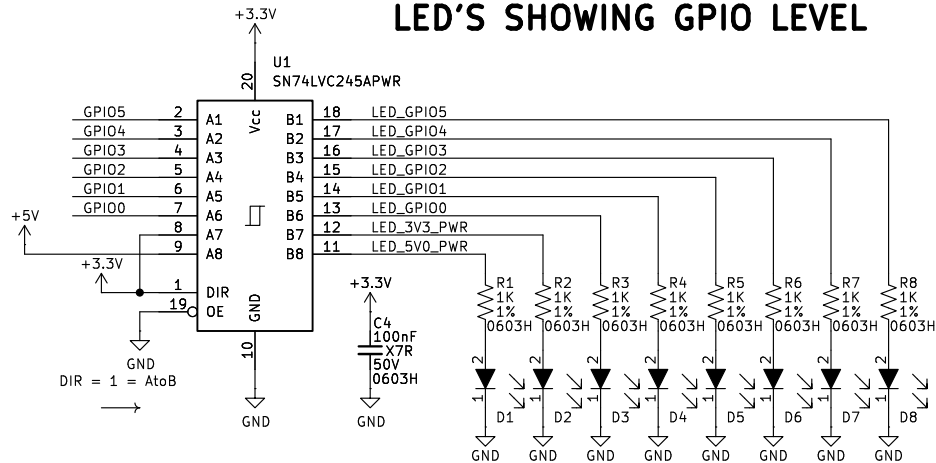

MOUNTING/TOOLING HOLES

H1 MountingHole H2 MountingHole H3 MountingHole H4 MountingHole

LOG01



PCB STACKUP NOTE

JLC04161H-7628 (STD) stackup gives :
* 50ohm trace impedance for 13mil trace.

This documentation describes Open Hardware and is licensed under the CERN OHL v. 1.2.

You may redistribute and modify this documentation under the terms of the CERN OHL v.1.2. (<http://ohwr.org/cernohl>).
This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING OF MERCHANTABILITY,
SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1.2 for applicable conditions

GPIO On LED Display

Title: GOLD

Size: USLetter

Date: 2024-07-24

Rev: 0

KiCad E.D.A. 8.0.4

Drawn: Denno Wiggle

Id: 1/1