




Motor trifásico normalizado SEW DNM B3

3D view

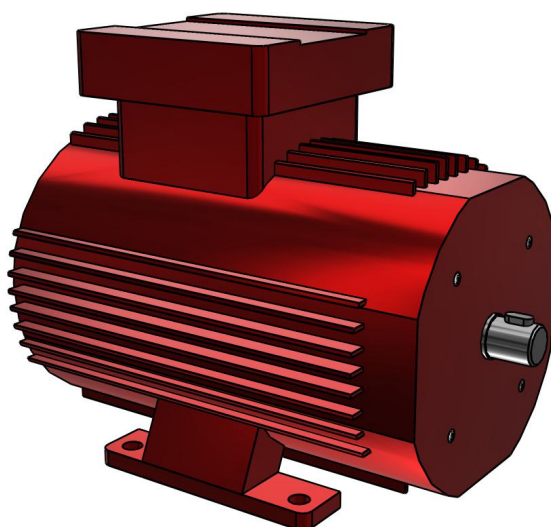

HOW TO ACTIVATE 3D?

To activate the interactive 3D view in Acrobat Reader, you need to select, at the top of the page, **Options** and then **Trust this document**



Zoom

Moves you toward or away from objects in the scene when you drag vertically. You can also zoom with the hand tool by holding down Shift as you drag.



Pan

Moves the model vertically and horizontally only. You can also pan with the hand tool: Ctrl-drag.



Rodar

Turns 3D objects around relative to the screen. How the objects move depends on the starting view, where you start dragging and the direction in which you drag.



Augmented Reality (AR) - Digital meets real

Augmented Reality, often shortened to AR, is a technology that blends digital information into the real world.


For more information, please click [here](#) or directly try yourself by scanning the QR code with your phone.






Motor trifásico normalizado SEW DNM B3

2D derivation

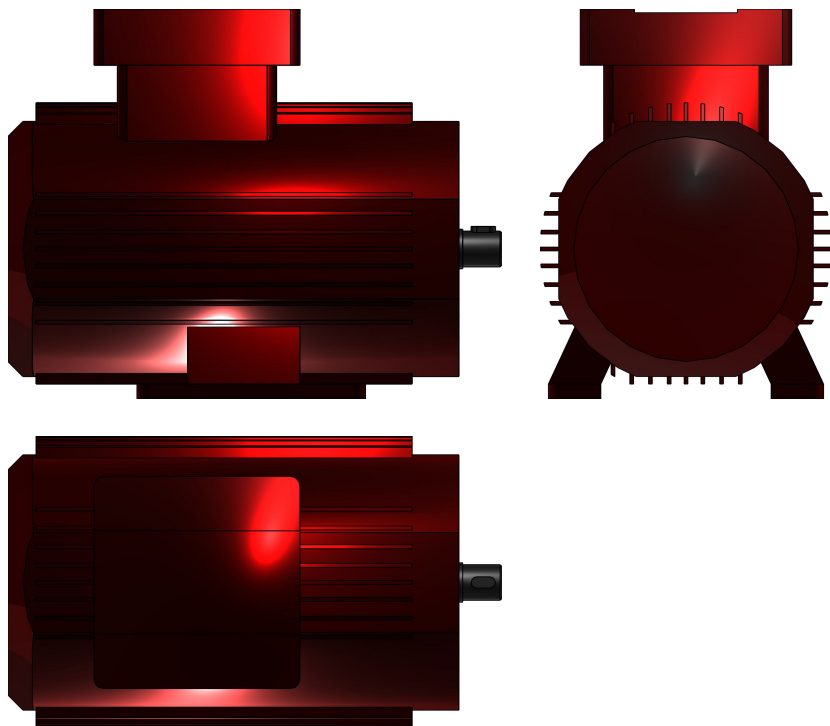

ISO view

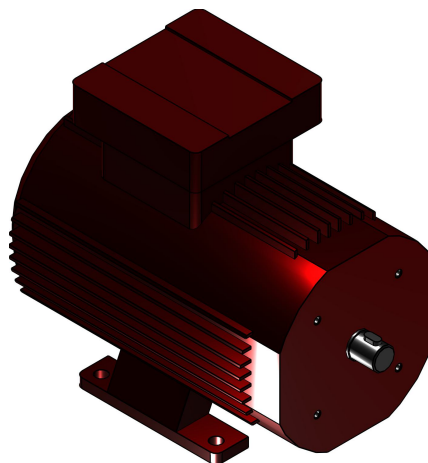


Bill-Of-Materials


N°	Descrição:	Quantidade
1.1	DRN80MK4-B3	1



Motor trifásico normalizado SEW DNM B3

Technical drawings

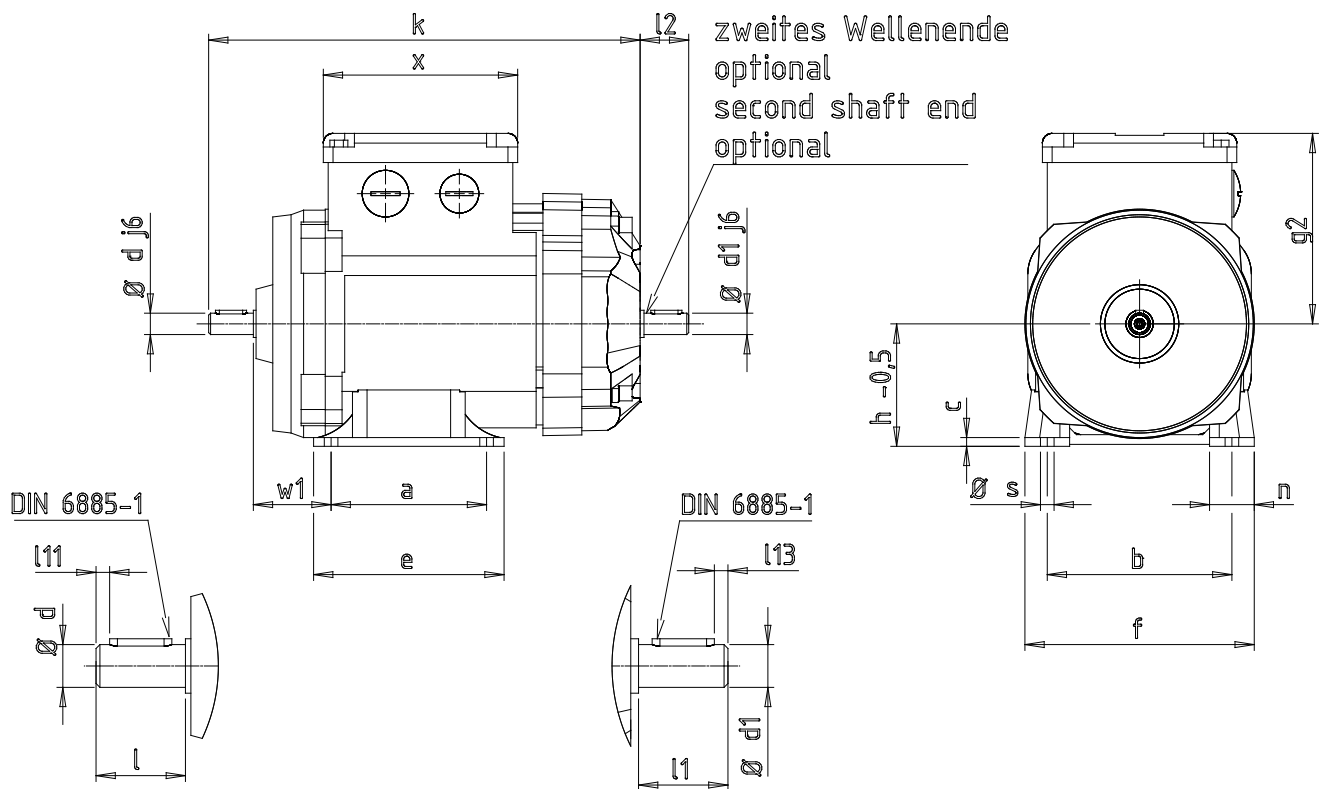



Motor trifásico normalizado SEW DNM B3

Technical data

BG (tamanho)	DRN80MK4
BF (Modelo)	B3
WE (Segunda extremidade do eixo (opcional))	Não
A (a / mm)	100
B (b / mm)	125
C (c / mm)	8.0
D (d / mm)	19
D1 (d1 / mm)	11
E (e / mm)	122
F (f / mm)	147
G2 (g2 / mm)	128
H (h / mm)	80
K (k / mm)	281 (362)
L1 (l1 / mm)	23
LL2 (l/l2 / mm)	25.0
L11L13 (l11/l13 / mm)	3.5
N (n / mm)	28
S (s / mm)	10
W1 (w1 / mm)	50
X (x / mm)	110
NENNL (potência nominal / kW)	0.55
NENNDREH (velocidade nominal / 1/min)	1435
LEISTF (fator de potência / cos j)	0.75
NENNSTROM (Corrente nominal a 400 V / A)	1.29
ANLAUFSTROMVER (Relação de corrente de arranque / IA/IN)	6.1
NENNM (binário nominal / Nm)	3.65
ANLAUFMOMENTVER (Relação de binário de arranque / MA/MN)	2.7
HOCHLAUFMOM (Relação de binário de arranque / MH/MN)	2.1
TRAEGMOM (Momento de inércia J Mot / 10-4kgm2)	17.10
TRAEGMOMBREM (Momento de inércia J Travão / 10-4kgm2)	18.60
BREMSMOM (binário de travagem / Nm)	7.0
MASMOT (Massa do motor / kg)	11.0
MASBREM (Massa com travão / kg)	14.0
HOLAUMOMVER (Relação de binário de arranque / MH/MN)	2.1
TRAHEIMOMROT (Momento de inércia J Mrot / 10-4kgm2)	17.10
TRAHEIMOMBREMS (Momento de inércia J Travão / 10-4kgm2)	18.60
CNSCTN (número da pauta aduaneira)	85015100

STDDTIME (Prazo de entrega padrão)	O prazo de entrega atual para motores configuráveis é de 2 a 8 semanas, dependendo da situação dos pedidos. Para prazos de entrega mais curtos, por favor, consulte-nos.
USECASE (caso de aplicação)	Anwendungsfall anzeigen

