

# Protocols for Passive Acoustic Sampling of Bats in the Plumas National Forest

*Derek Corcoran*

*14 November, 2016*

## Contents

<b>1</b>	<b>Data collection</b>	<b>1</b>
1.1	Before you depart check that you have: . . . . .	1
1.2	Getting to the sampling points . . . . .	2
1.3	Vegetation plot . . . . .	2
1.3.1	Canopy cover . . . . .	2
1.3.2	Land cover area . . . . .	3
1.3.3	Basal area . . . . .	3
1.4	Acoustic monitoring . . . . .	4
1.4.1	Day 1 . . . . .	4
1.4.2	Day 4 . . . . .	4
1.5	Extracting audio files from the CF cards . . . . .	7
1.6	Using sonobat to automatically classify bat calls into species . . . . .	7
1.6.1	Filter low quality calls . . . . .	7
1.6.2	Classify bat calls . . . . .	8
1.6.3	Interpret the results made by sonobat . . . . .	8
1.6.4	Get sonobat's help to manually vet inconclusive calls . . . . .	8
	<b>Data Sheet</b>	<b>8</b>

## 1 Data collection

### 1.1 Before you depart check that you have:

- A bat detector for each sampling point
- An ibutton for each sampling point
- Data sheet for each sampling point
- A three meter pipe for each sampling point
- An iron rod for each sampling point
- A clamp for each sampling point
- A mallet
- A wedged prism
- A diametrical tape

- A 50 mts measuring tape
- A densitometer
- Pencils
- Duct tape
- A GPS with all the sampling points
- A detailed map of the sampling points

## 1.2 Getting to the sampling points

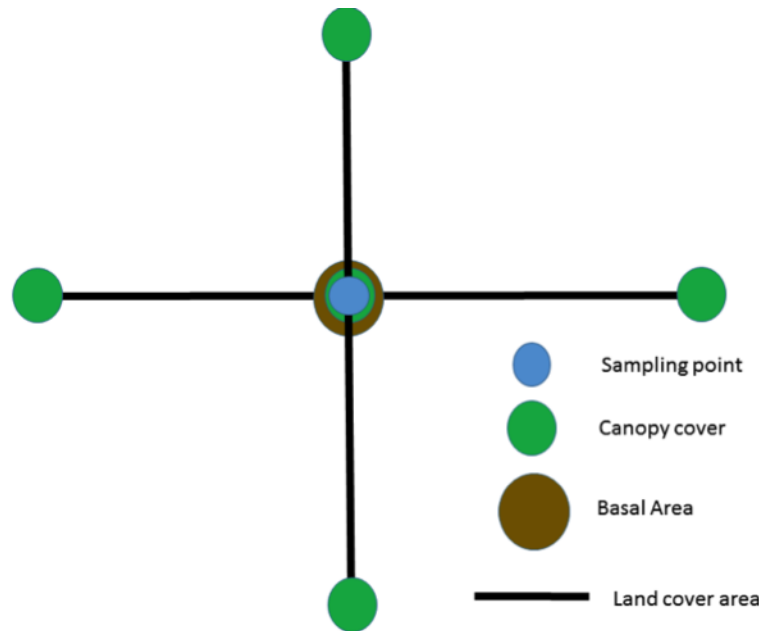


Figure 1: Drawing of the sampling site showing where to take each measurement

Head to the sampling points appointed for the day using the GPS and maps, once you get to the point use the mallet to stick an iron rod on the sampling point about half way through. This will help you to remember where the point is and it will be used later on to install the bat detector. Before putting up the detector, measurements of vegetation attributes will be measured from the sampling site; the measurements that will be taken are Canopy cover, land cover area and basal area. In the next paragraphs the sampling methods will be explained. In figure 1 a drawing of the sampling site is shown.

## 1.3 Vegetation plot

### 1.3.1 Canopy cover

**1.3.1.1 Description** The canopy cover is the percentage of overhead sky covered with canopy. This is measured with a gridded concave densitometer. These measurements are taken at 50 meters towards each of the four cardinal points from the sampling point and at the sampling point (figure 1).

**1.3.1.2 Activity** To use the densitometer, hold the instrument at 12 to 18 inches in front of you at elbow height, use the level bubble to make sure that the densitometer is flat. If the densitometer is in the right

position you should be able to see your forehead in the mirror of the densiometer but it shouldn't overlap with the grid (Figure 2), you should also see a bubble within the drawn circle . For each one of the 24 squares in the grid imagine 4 equidistant dots and count the ones that are not in the open sky. Write down that number and repeat it for all of the 5 points in each sampling area.

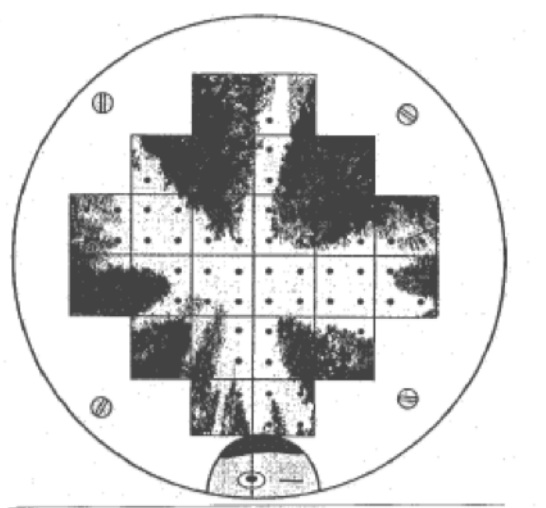


Figure 2: Drawing of how an image should be seen in a spherical densiometer when collecting data, notice that you should see your head in the reflection, but it should not touch the grid, extracted from Standard Operating Procedure for Determining Canopy Closure using a Concave Spherical Densiometer – Model C for the Extensive Riparian Status and Trends Monitoring Program Washington state Department of Ecology

### 1.3.2 Land cover area

**1.3.2.1 Description** Land cover area, is the percentage of land covered by each vegetation type, in order to measure this the type of vegetation of 50 plots in each cardinal point will be determined from the sampling point.

**1.3.2.2 Activity** From the sampling point take the measuring tape and walk 50 meters straight with the compass, for every meter, determine visually the dominant Land cover in the following categories: woody growth, herbaceous growth, Grass, Naked Soil, Rocky Scree, Down wood or leaf Litter.

**1.3.2.2.1 Use of the compass to walk a straight line towards a cardinal point.** Place the compass horizontal to the ground and point towards the cardinal point you need to walk to. Place one of your eyes on the optics (figure 3), turn around until you find the needed number to follow, if you are heading South that number will be 180, East 90, West 270, and North 0. Keeping both eyes open, use the eye you have in the optics of the compass to keep your bearing, and the other one to navigate through obstacles while you take the measuring tape to 50 meters of distance in that direction. After that, go back looking in each meter interval. For each meter imagine a square of 1 by 1 meter and determine if the dominant land cover type as woody growth, herbaceous growth, Grass, Naked Soil, Rocky Scree, Down wood or leaf Litter.

### 1.3.3 Basal area

**1.3.3.1 Description** Basal area is the square meters per hectare covered by the trunk of a tree within the plot, this is measured using a diametrical tape to measure the diameter of the tree, and a wedge prism to check which trees are in or out of the vegetation plot.

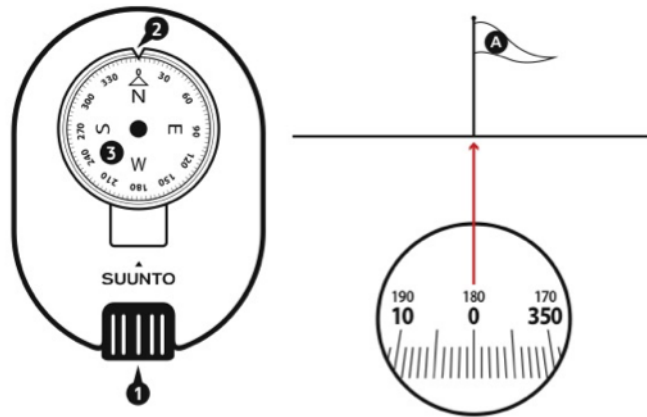


Figure 3: Drawing of a compass showing 1 optics, 2 bearing index and 3 compass card: right, looking through the optics, figures extracted from Suunto KB-20 compass user guide.

**1.3.3.2 Activity** The first person stands in the sampling point and uses the wedge prism to check every tree starting on the north rotating in a clockwise direction in the spot. To check whether a tree is in or out of the sampling plot, standing in the sampling point, look at a tree through the wedge prism; if the image of the tree trunk that you see in the prism overlaps with the one outside of the prism, the tree is in the vegetation plot, and it should be measured. If they don't overlap, the tree is out of the vegetation plot and shouldn't be measured (Figure 4).

## 1.4 Acoustic monitoring

### 1.4.1 Day 1

**1.4.1.1 Setting of the Pettersson D500x bat detector** Open the lower case of the Pettersson d500x (Figure 5) and Set the toggle to INT, carefully close the lower case To protect the memory cards.

In the front of the bat detector (Figure 6), press F1 and go to "RECORDING SETTINGS", press enter, and set INPUT GAIN=80, TRIG LEV=80, INTERVAL=0, and press ENTER again. Return the detector to the box, close it, and leave only the microphone out trying to leave the box hidden from casual visitors.

Attach the microphone to the PVC pipe in the clamp, and attach the clamp to the metal pipe, then put the metal pipe in the iron rod set in the sampling point. Attach the ibutton to the box of the detector using duct tape.

### 1.4.2 Day 4

**1.4.2.1 Retrieving the detector** Return to the sampling point, open the box, and put the toggle in OFF before you do anything else. Make sure to put everything neatly in the box, and return with the detector, pipe, iron rod, clamp, ibutton and microphone.

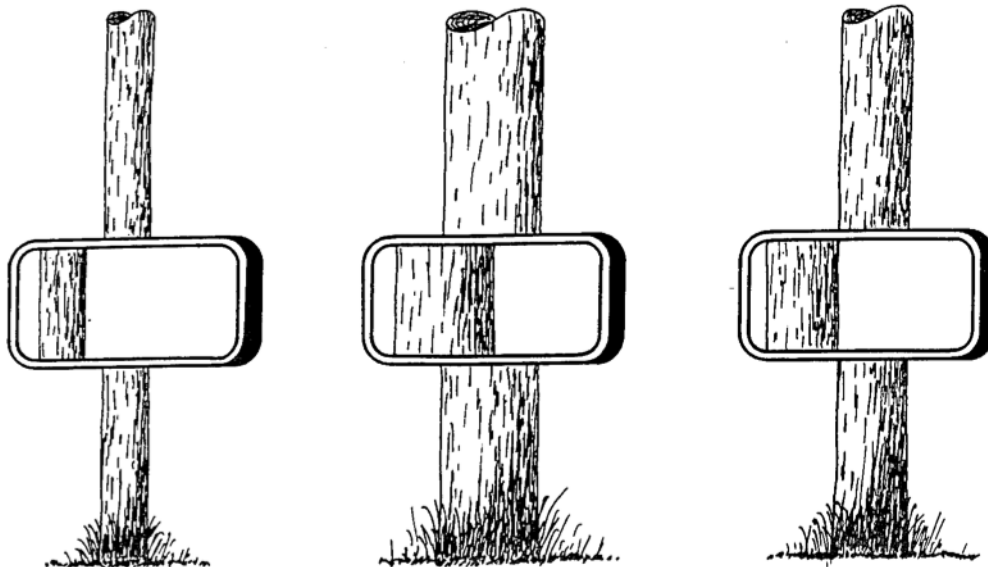


Figure 4: Figure showing three trees as seen through a wedge prism, in this case from left to right, the first tree is out, the second is in and the third one is questionable, extracted from Mitchell, W. A., Hughes, H. G., & Marcy, L. E. (1995). Prism Sampling: Section 6.2. 3, US Army Corps of Engineers Wildlife Resources Management Manual(No. WES/TR/EL-95-24). ARMY ENGINEER WATERWAYS EXPERIMENT STATION VICKSBURG MS ENVIRONMENTAL LAB.

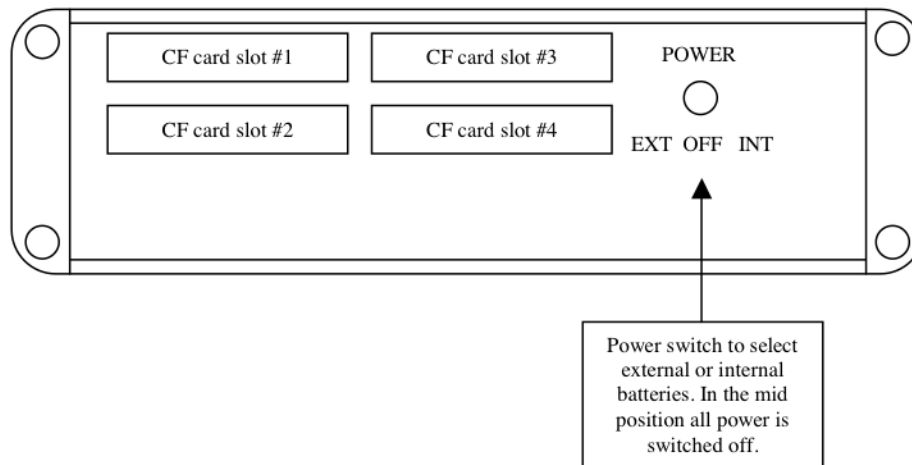


Figure 5: Lower case of the Petterson bat detector, extracted from D500X USER'S MANUAL Firmware

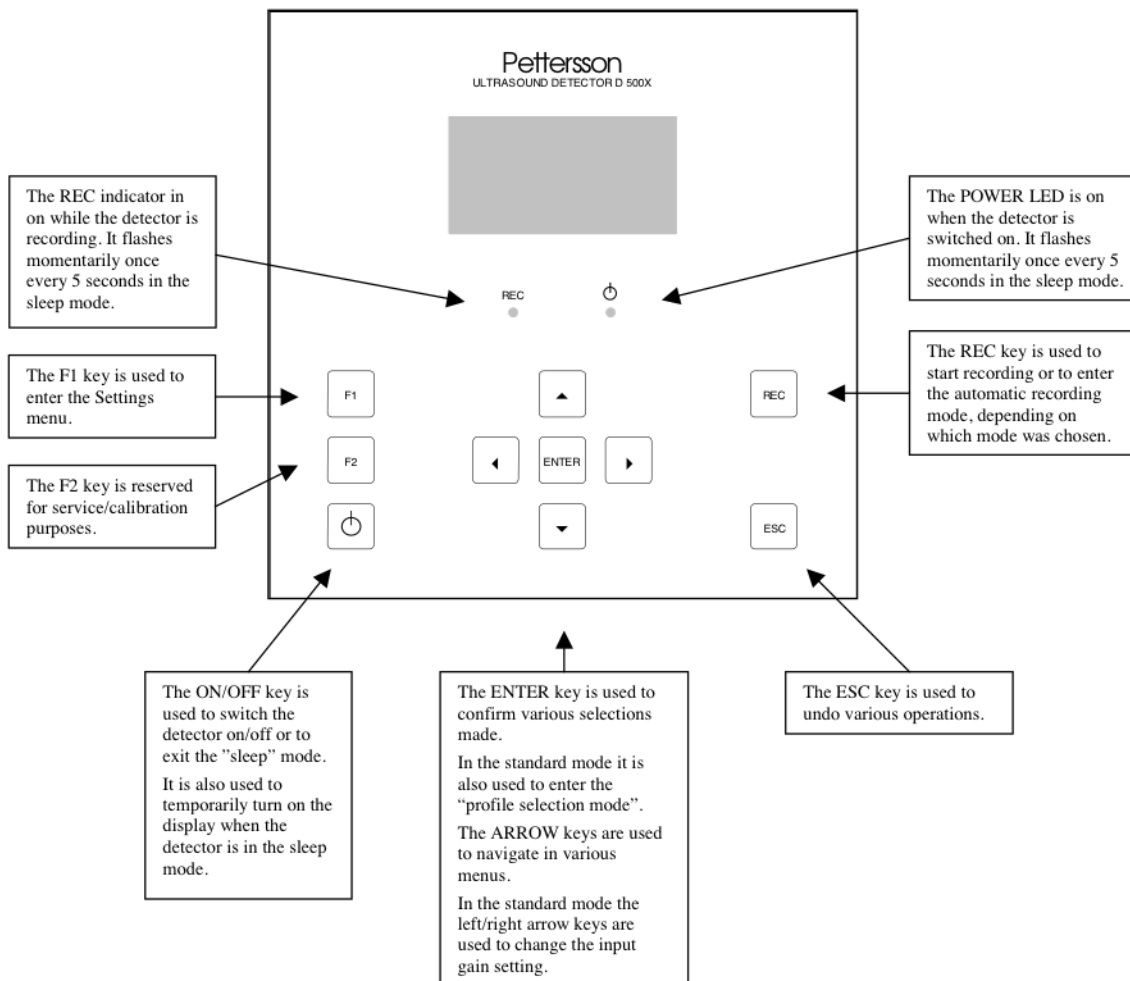


Figure 6: Front of the Pettersson bat detector extracted from D500X USER'S MANUAL Firmware version 2.2.5

## 1.5 Extracting audio files from the CF cards

Once you have retrieved the bat detectors it is important to extract the audiofiles from the CF cards before you can classify the calls. The best way is to use the D500X Utility Windows programs that facilitates the use of the CF cards with the detectors and can be downloaded from <http://www.batsound.com>. We recommend that you upgrade to the most recent version of the software, as older versions might not be fully compatible with current windows versions.

## 1.6 Using sonobat to automatically classify bat calls into species

### 1.6.1 Filter low quality calls

Besides the classification of bat calls sonobat has several utilities, such as the Batch Scrubber.

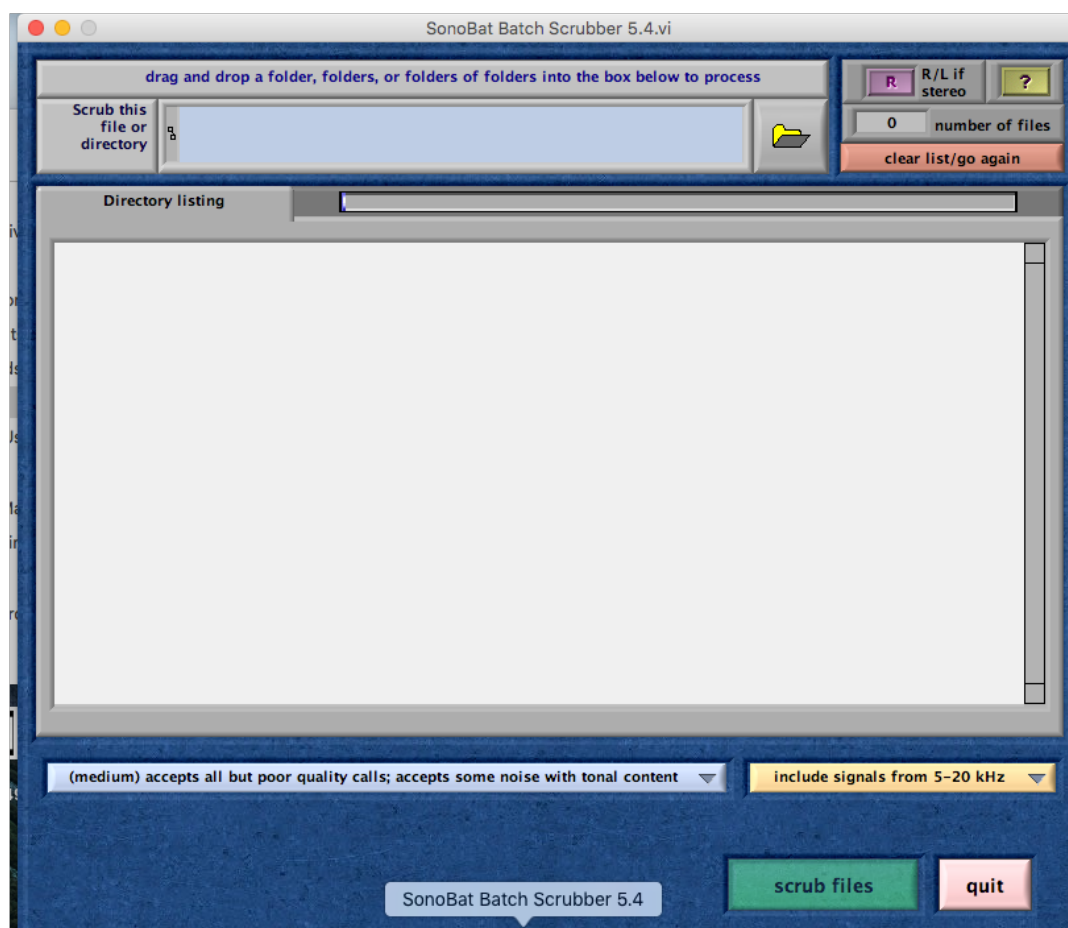


Figure 7: Screenshot of the Sonobat Scrubber Utility

The Batch Scrubber will scan through a specified directory to recognize files lacking bat calls, for example files triggered by noise and move them into a directory named “Scrubbed Files” in the same directory as the searched files. In order to use the Scrubber just press the button that looks like a folder in the upper-right corner and select the folder with the files to scrub

### **1.6.2 Classify bat calls**

Sonobat uses 74 acoustic features to classify bats into different species, in the version of the program that classifies the western species in the US, the automatic classification of Sonobat has an average accuracy of 98.6, with no species being correctly classified in less than 96% of the time.

The easiest way of using sonobat for automatically classifying bat calls is using the batch classify feature after scrubbing the data (see previous section).

### **1.6.3 Interpret the results made by sonobat**

- Reading sonobat's output files
- How to see which species are present according to sonobat

### **1.6.4 Get sonobat's help to manually vet inconclusive calls**

- How to get sonobat's help to manually vet species that are uncertain to be present

## **Data Sheet**



	<b>Kaleidoscope Pro 2.0.6</b>		<b>SonoBat 3.2</b>	
	<b>% correct</b>	<b>% classified</b>	<b>% correct</b>	<b>% classified</b>
<b>Myyu</b>	<b>51.5</b>	<b>39.2</b>	<b>98.4</b>	<b>79.5</b>
<b>Myca</b>	<b>62.5</b>	<b>4.9</b>	<b>98.2</b>	<b>68.9</b>
<b>Myci</b>	<b>94.0</b>	<b>48.6</b>	<b>99.6</b>	<b>83.9</b>
<b>Myvo</b>	<b>60.3</b>	<b>29.3</b>	<b>96.4</b>	<b>51.4</b>
<b>Mylu</b>	<b>54.2</b>	<b>36.5</b>	<b>98.5</b>	<b>67.2</b>
<b>Pahe</b>	<b>96.8</b>	<b>53.3</b>	<b>97.0</b>	<b>95.8</b>
<b>Labl</b>	<b>37.5</b>	<b>3.9</b>	<b>99.1</b>	<b>73.2</b>
<b>Myev</b>	<b>90.9</b>	<b>43.6</b>	<b>98.9</b>	<b>86.4</b>
<b>Anpa</b>	<b>55.7</b>	<b>23.5</b>	<b>96.0</b>	<b>57.9</b>
<b>Epfu</b>	<b>54.4</b>	<b>9.7</b>	<b>99.5</b>	<b>60.1</b>
<b>Lano</b>	<b>62.3</b>	<b>20.3</b>	<b>98.1</b>	<b>87.1</b>
<b>Myth</b>	<b>39.1</b>	<b>16.8</b>	<b>99.5</b>	<b>70.4</b>
<b>Tabr</b>	<b>64.7</b>	<b>4.0</b>	<b>98.2</b>	<b>91.6</b>
<b>Laci</b>	<b>86.2</b>	<b>22.0</b>	<b>99.7</b>	<b>86.3</b>
<b>Coto</b>	<b>81.0</b>	<b>23.3</b>	<b>100.0</b>	<b>81.6</b>
<b>Euma</b>	<b>80.0</b>	<b>2.8</b>	<b>100.0</b>	<b>78.0</b>
<b>Eupe</b>	<b>0.0</b>	<b>0.0</b>	<b>98.8</b>	<b>62.0</b>
<b>All</b>	<b>68.6</b>	<b>33.5</b>	<b>98.6</b>	<b>78.6</b>

Figure 8: Comparative classification performance of Kaleidoscope and SonoBat on 5224 good quality species-known recordings collected and processed by T. Malloy of Stanford Jasper Ridge Biological Preserve in California (2014). “% classified” indicates the percentage of known recordings given a decision, and “% correct” indicates the rate of correct classification of those outputted with a decision.