

Quick start

From the box to your first glass.


HAVE READY

A **1-3/8 in counter hole**, cold water and a grounded **120 V** outlet. A filled **5 lb CO2 cylinder** with the supplied regulator fitted and leak-checked. Two **14.8 fl oz** bottles of SodaStream-compatible concentrate.

INSTALL

Keep the cylinder closed and the power unplugged while making the connections.


1 Mount the faucet

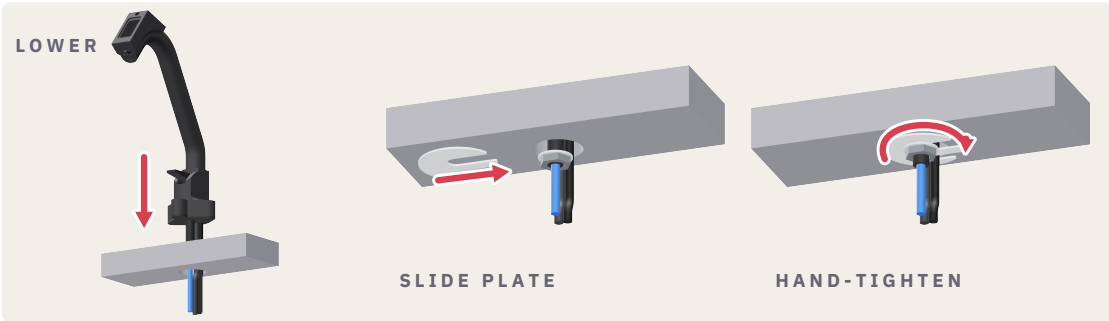


Feed the attached tubes and cable through the hole. Lower the faucet, then **push it back** until the black tubes rest against the back of the hole.

From below, slide the steel plate **above the retained washer and nut**. Wide slot around the shank; narrow slot around the black tubes. Tighten the nut by hand.


2 Add the cold-water tee

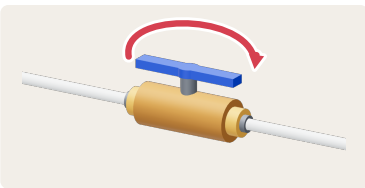

Close the cold supply. Run the cold tap until flow stops to release pressure. Put a cup and towel under the fitting.

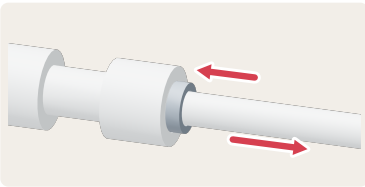

Release the existing tube. Hold the fitting's release ring in with the collet press. Keep it pressed while pulling the tube out.

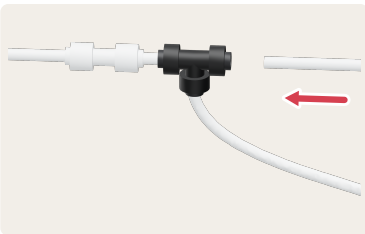

Insert the supplied tee. Push its short tube into the fitting you opened. Reconnect the original tube to the tee's open end. The white filtered run arrives attached.

3 Match the connections



- TAP** White, from the filter.
- CO2** Red, from the cylinder.
- SODA** Blue, from the faucet.
- FLAVOR** Two black faucet tubes.

Faucet cable: click its plug into the small square jack.

Pull out the two shipping caps. Push every tube fully home (a little over 1/2 in), then tug gently. Either black tube fits either FLAVOR port.

Lay the filter flat. Leave the tubes long, with easy curves and the slack coiled.

Leave 1-5/8 in at both sides and 2-3/8 in behind the appliance.

Braided cold-water hose instead? Use the white tee: install guide, pages 9-11.

THEN MAKE YOUR FIRST GLASS


4 Connect the cylinder



Keep the cylinder upright, with its valve closed.


Hand-tighten the red tube's brass nut onto the regulator's bottom outlet. Keep the fitted regulator on the cylinder. If it has not been fitted and leak-checked, the refill shop can do that.

5 Water, gas, then power

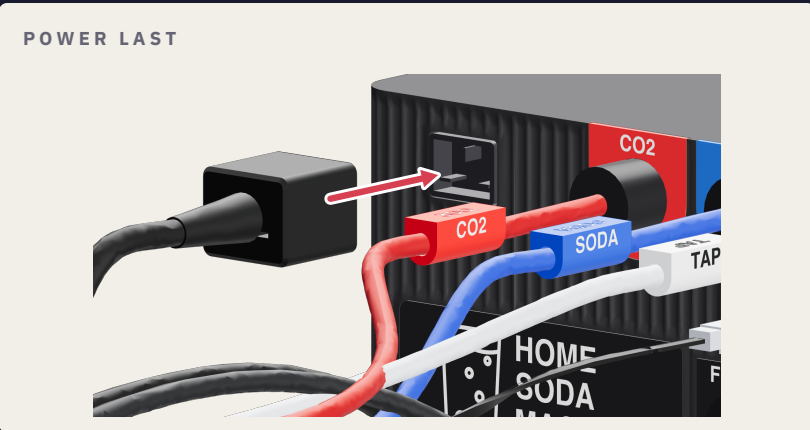

Water: open slowly. Watch every water joint for a full minute.
Gas: open the cylinder and the small regulator knob. Turn the big knob until the upper gauge reads in the green. Check the gas joints.
Power: seat the cord in the top-left rear socket, then plug into grounded 120 V. It chimes.


6 Fill both flavors

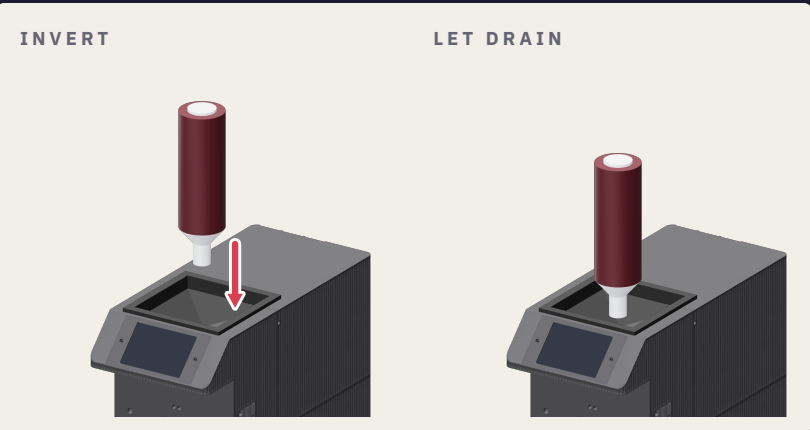

On the enclosure display, choose **FILL**, pick a flavor and press **Start**.

Invert one whole **14.8 fl oz bottle** over the funnel. Let it drain; the appliance stops the fill itself. Repeat for the second flavor.

7 Chill. Choose. Pour.

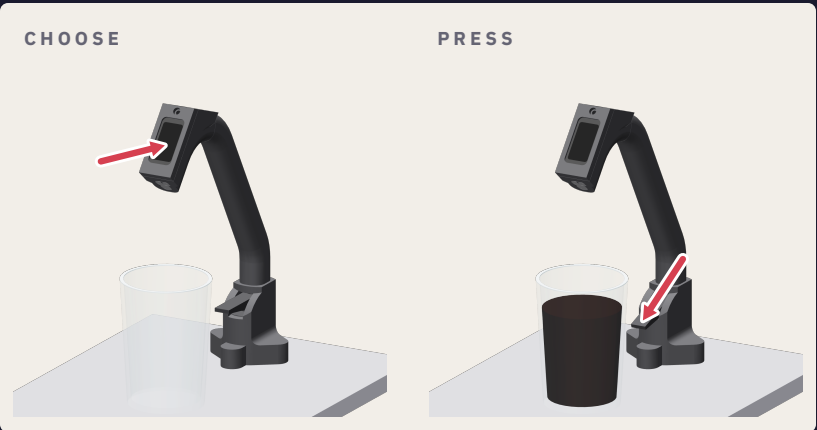

Allow about an hour for the first chill.

Choose: tap the faucet display to select a flavor. A dim screen takes one tap to wake.

Pour: place a glass underneath and press the faucet lever. Release it to stop.

Water, gas and power first. Then fill, chill and pour.