

Fine contour, across the whole guide.

Three colors. The same fine line. Each complete 19 x 13 in sheet follows this comparison.

● Original B gray

Same gray as the B study.

HOME SODA MACHINE


Quick start

From the box to your first glass.

Place the appliance: 1-5/8 in clear at each side, 2-3/8 in behind, and room above to invert a bottle into the funnel.


INSTALL

1 Mount the faucet



Feed the attached tubes and cable through the hole. Lower the faucet, then **push it back** until the black tubes meet the back of the hole.

2 Add the cold-water tee




1/4 in plastic tube? Use the black tee below. **Braided hose?** Follow install guide pp. 9-11, then return at **Step 3**.

Close the cold supply. Run the cold tap until it stops. Put a cup and towel under the fitting.

Hold the release ring in with the collet press. Keep it pressed while pulling the existing tube out.

3 Match the rear connections




Remove the CO2 and TAP caps. Open ports shown below.

Push every tube fully home (a little over 1/2 in), then tug gently. Either black tube fits either FLAVOR port.

Lay the filter flat. Keep long tubes in easy, coiled curves.

TURN IT ON


4 Connect the cylinder



Hand-tighten the red tube's brass nut onto the regulator's bottom outlet. Keep the fitted regulator on the cylinder.

Leak or continuing hiss? Close water and cylinder; get help.

5 Water, then gas, then power



1 WATER Open the cold supply **slowly**. Watch every water joint for a **full minute**.

2 GAS Open the cylinder and **small knob**. Use the **big knob** to set the upper needle in **green**. Check the brass nut and red CO2 port for leaks **before power**.

3 POWER Seat the cord in the **top-left rear socket**. Plug into grounded 120 V. **It chimes.**

6 Fill both flavors



On the enclosure display, choose **FILL** and select a flavor.

Invert one whole **14.8 fl oz bottle** into the funnel. Then press **START FILL**.

Wait for Filled. Repeat for the second flavor.

7 Chill. Choose. Pour.



FIRST CHILL: ABOUT 1 HOUR

Choose: tap the faucet display to select a flavor. A dim screen takes one tap to wake.

Pour: place a glass under the faucet and press the lever. Release it to stop.

FULL SHEET ON PAGE 2

WHITE TUBING

CLEAR GLASS

● Darker slate

Recommended. Applied to the guide.

HOME SODA MACHINE


Quick start

From the box to your first glass.

Place the appliance: 1-5/8 in clear at each side, 2-3/8 in behind, and room above to invert a bottle into the funnel.


INSTALL

1 Mount the faucet



Feed the attached tubes and cable through the hole. Lower the faucet, then **push it back** until the black tubes meet the back of the hole.

2 Add the cold-water tee



1/4 in plastic tube? Use the black tee below. **Braided hose?** Follow install guide pp. 9-11, then return at **Step 3**.

Close the cold supply. Run the cold tap until it stops. Put a cup and towel under the fitting.

Hold the release ring in with the collet press. Keep it pressed while pulling the existing tube out.

3 Match the rear connections



Remove the CO2 and TAP caps. Open ports shown below.

Push every tube fully home (a little over 1/2 in), then tug gently. Either black tube fits either FLAVOR port.

Lay the filter flat. Keep long tubes in easy, coiled curves.

TURN IT ON


4 Connect the cylinder



Hand-tighten the red tube's brass nut onto the regulator's bottom outlet. Keep the fitted regulator on the cylinder.

Leak or continuing hiss? Close water and cylinder; get help.

5 Water, then gas, then power



1 WATER Open the cold supply **slowly**. Watch every water joint for a **full minute**.

2 GAS Open the cylinder and **small knob**. Use the **big knob** to set the upper needle in **green**. Check the brass nut and red CO2 port for leaks **before power**.

3 POWER Seat the cord in the **top-left rear socket**. Plug into grounded 120 V. **It chimes.**

6 Fill both flavors



On the enclosure display, choose **FILL** and select a flavor.

Invert one whole **14.8 fl oz bottle** into the funnel. Then press **START FILL**.

Wait for Filled. Repeat for the second flavor.

7 Chill. Choose. Pour.



FIRST CHILL: ABOUT 1 HOUR

Choose: tap the faucet display to select a flavor. A dim screen takes one tap to wake.

Pour: place a glass under the faucet and press the lever. Release it to stop.

FULL SHEET ON PAGE 3

WHITE TUBING

CLEAR GLASS

● Near-black

The strongest of these three contours.

HOME SODA MACHINE


Quick start

From the box to your first glass.

Place the appliance: 1-5/8 in clear at each side, 2-3/8 in behind, and room above to invert a bottle into the funnel.


INSTALL

1 Mount the faucet



Feed the attached tubes and cable through the hole. Lower the faucet, then **push it back** until the black tubes meet the back of the hole.

2 Add the cold-water tee



1/4 in plastic tube? Use the black tee below. **Braided hose?** Follow install guide pp. 9-11, then return at **Step 3**.

Close the cold supply. Run the cold tap until it stops. Put a cup and towel under the fitting.

Hold the release ring in with the collet press. Keep it pressed while pulling the existing tube out.

3 Match the rear connections




Remove the CO2 and TAP caps. Open ports shown below.

Push every tube fully home (a little over 1/2 in), then tug gently. Either black tube fits either FLAVOR port.

Lay the filter flat. Keep long tubes in easy, coiled curves.

TURN IT ON


4 Connect the cylinder



Hand-tighten the red tube's brass nut onto the regulator's bottom outlet. Keep the fitted regulator on the cylinder.

Leak or continuing hiss? Close water and cylinder; get help.

5 Water, then gas, then power




1 WATER Open the cold supply **slowly**. Watch every water joint for a **full minute**.

2 GAS Open the cylinder and **small knob**. Use the **big knob** to set the upper needle in **green**. Check the brass nut and red CO2 port for leaks **before power**.

3 POWER Seat the cord in the **top-left rear socket**. Plug into grounded 120 V. **It chimes.**

6 Fill both flavors



On the enclosure display, choose **FILL** and select a flavor.

Invert one whole **14.8 fl oz bottle** into the funnel. Then press **START FILL**.

Wait for Filled. Repeat for the second flavor.

7 Chill. Choose. Pour.



FIRST CHILL: ABOUT 1 HOUR

Choose: tap the faucet display to select a flavor. A dim screen takes one tap to wake.

Pour: place a glass under the faucet and press the lever. Release it to stop.

FULL SHEET ON PAGE 4

WHITE TUBING

CLEAR GLASS

All contours are 0.6 pt wide on the page. Color changes; illustration size and instructions stay the same.

Quick start

From the box to your first glass.

HAVE READY


A **1-3/8 in counter hole**, cold water and grounded **120 V**. A filled **5 lb CO2 cylinder** with the supplied regulator fitted and leak-checked. Two **14.8 fl oz** bottles of SodaStream-compatible concentrate.

Place the appliance: 1-5/8 in clear at each side, 2-3/8 in behind, and room above to invert a bottle into the funnel.

INSTALL

Cylinder closed. Power unplugged.

1 Mount the faucet

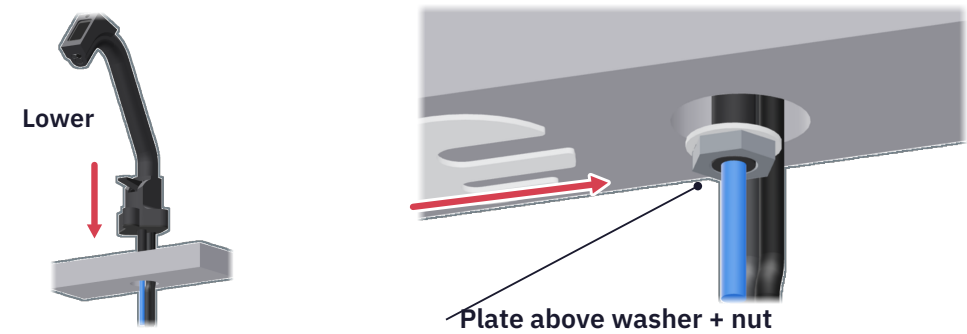


Feed the attached tubes and cable through the hole. Lower the faucet, then **push it back** until the black tubes meet the back of the hole.

From below, slide the steel plate **above the retained washer and nut**. Wide slot around the shank; narrow slot around the black tubes. **Hand-tighten the nut**.

2 Add the cold-water tee

1/4 in plastic tube? Use the black tee below.
Braided hose? Follow install guide pp. 9-11, then return at **Step 3**.

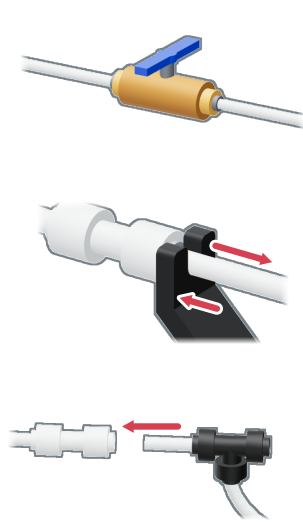

Close the cold supply. Run the cold tap until it stops. Put a cup and towel under the fitting.

Hold the release ring in with the collet press. Keep it pressed while pulling the existing tube out.

Push the tee's short tube into that fitting. Reconnect the original tube to the tee's open end. The white filtered run is already attached.

3 Match the rear connections

Remove the CO2 and TAP caps. Open ports shown below.



- CO2** Red / cylinder
- SODA** Blue / faucet
- TAP** White / filter
- FLAVOR** Black / either port
- Faucet cable** Click into the square jack.

Push every tube fully home (a little over 1/2 in), then tug gently. Either black tube fits either FLAVOR port.

Lay the filter flat. Keep long tubes in easy, coiled curves.

TURN IT ON

4 Connect the cylinder




Hand-tighten the red tube's brass nut onto the regulator's bottom outlet. Keep the fitted regulator on the cylinder.

Leak or continuing hiss? Close water and cylinder; get help.


5 Water, then gas, then power

1 WATER

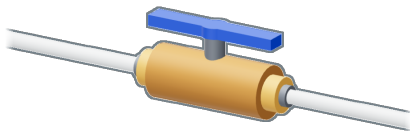


Open the cold supply **slowly**. Watch every water joint for a **full minute**.

2 GAS

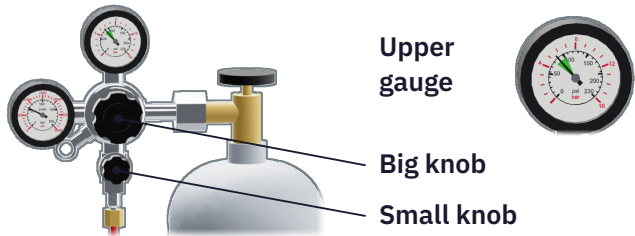

Open the cylinder and **small knob**. Use the **big knob** to set the upper needle in **green**. Check the brass nut and red CO2 port for leaks **before power**.

3 POWER

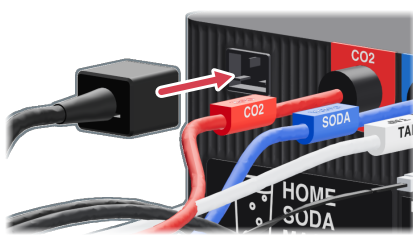

Seat the cord in the **top-left rear socket**. Plug into grounded 120 V. **It chimes**.


YOUR FIRST GLASS

6 Fill both flavors

On the enclosure display, choose **FILL** and select a flavor.

Invert one whole **14.8 fl oz bottle** into the funnel. Then press **START FILL**.

Wait for Filled. Repeat for the second flavor.

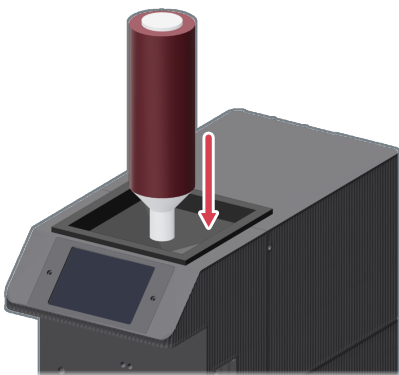

7 Chill. Choose. Pour.

FIRST CHILL: ABOUT 1 HOUR

Choose: tap the faucet display to select a flavor. A dim screen takes one tap to wake.

Pour: place a glass under the faucet and press the lever. Release it to stop.



Quick start

From the box to your first glass.

HAVE READY


A **1-3/8 in counter hole**, cold water and grounded **120 V**. A filled **5 lb CO2 cylinder** with the supplied regulator fitted and leak-checked. Two **14.8 fl oz** bottles of SodaStream-compatible concentrate.

Place the appliance: **1-5/8 in** clear at each side, **2-3/8 in** behind, and room above to invert a bottle into the funnel.

INSTALL

Cylinder closed. Power unplugged.

1 Mount the faucet

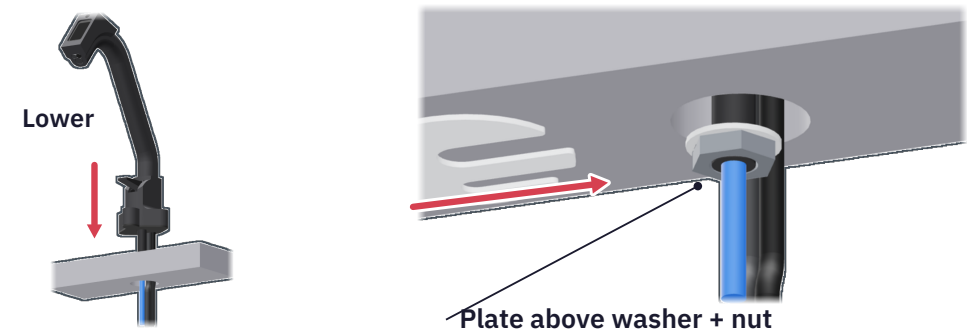


Feed the attached tubes and cable through the hole. Lower the faucet, then **push it back** until the black tubes meet the back of the hole.

From below, slide the steel plate **above the retained washer and nut**. Wide slot around the shank; narrow slot around the black tubes. **Hand-tighten the nut**.


2 Add the cold-water tee

1/4 in plastic tube? Use the black tee below.
Braided hose? Follow install guide pp. 9-11, then return at **Step 3**.



Close the cold supply. Run the cold tap until it stops. Put a cup and towel under the fitting.

Hold the release ring in with the collet press. Keep it pressed while pulling the existing tube out.



Push the tee's short tube into that fitting. Reconnect the original tube to the tee's open end. The white filtered run is already attached.

3 Match the rear connections

Remove the CO2 and TAP caps. Open ports shown below.



- CO2** Red / cylinder
- SODA** Blue / faucet
- TAP** White / filter
- FLAVOR** Black / either port
- Faucet cable** Click into the square jack.

Push every tube fully home (a little over 1/2 in), then tug gently. Either black tube fits either FLAVOR port.

Lay the filter flat. Keep long tubes in easy, coiled curves.

TURN IT ON

4 Connect the cylinder




Hand-tighten the red tube's brass nut onto the regulator's bottom outlet. Keep the fitted regulator on the cylinder.

Leak or continuing hiss? Close water and cylinder; get help.


5 Water, then gas, then power

1 WATER

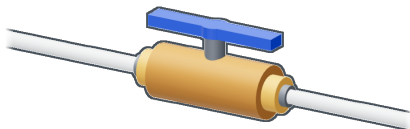


Open the cold supply **slowly**. Watch every water joint for a **full minute**.

2 GAS

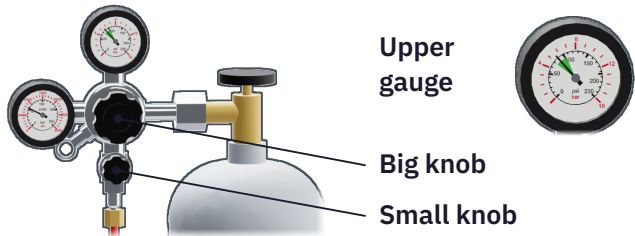

Open the cylinder and **small knob**. Use the **big knob** to set the upper needle in **green**. Check the brass nut and red CO2 port for leaks **before power**.

3 POWER

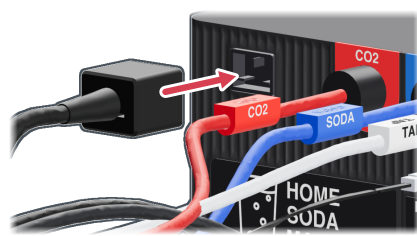

Seat the cord in the **top-left rear socket**. Plug into grounded 120 V. **It chimes**.


YOUR FIRST GLASS

6 Fill both flavors

On the enclosure display, choose **FILL** and select a flavor.

Invert one whole **14.8 fl oz bottle** into the funnel. Then press **START FILL**.

Wait for Filled. Repeat for the second flavor.

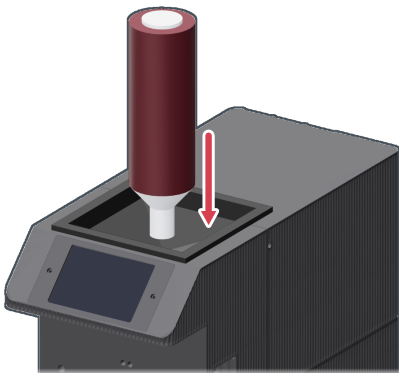

7 Chill. Choose. Pour.

FIRST CHILL: ABOUT 1 HOUR

Choose: tap the faucet display to select a flavor. A dim screen takes one tap to wake.

Pour: place a glass under the faucet and press the lever. Release it to stop.



Quick start

From the box to your first glass.

HAVE READY


A **1-3/8 in counter hole**, cold water and grounded **120 V**. A filled **5 lb CO2 cylinder** with the supplied regulator fitted and leak-checked. Two **14.8 fl oz** bottles of SodaStream-compatible concentrate.

Place the appliance: 1-5/8 in clear at each side, 2-3/8 in behind, and room above to invert a bottle into the funnel.

INSTALL

Cylinder closed. Power unplugged.

1 Mount the faucet

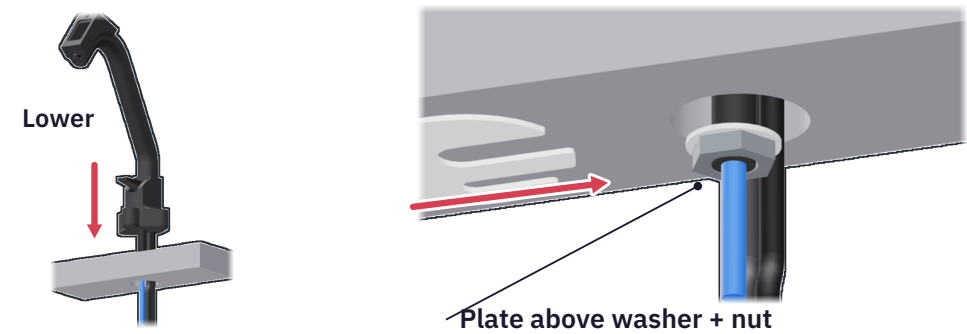


Feed the attached tubes and cable through the hole. Lower the faucet, then **push it back** until the black tubes meet the back of the hole.

From below, slide the steel plate **above the retained washer and nut**. Wide slot around the shank; narrow slot around the black tubes. **Hand-tighten the nut.**


2 Add the cold-water tee

1/4 in plastic tube? Use the black tee below.
Braided hose? Follow install guide pp. 9-11, then return at **Step 3**.



Close the cold supply. Run the cold tap until it stops. Put a cup and towel under the fitting.

Hold the release ring in with the collet press. Keep it pressed while pulling the existing tube out.



Push the tee's short tube into that fitting. Reconnect the original tube to the tee's open end. The white filtered run is already attached.

3 Match the rear connections

Remove the CO2 and TAP caps. Open ports shown below.



- CO2** Red / cylinder
- SODA** Blue / faucet
- TAP** White / filter
- FLAVOR** Black / either port
- Faucet cable** Click into the square jack.

Push every tube fully home (a little over 1/2 in), then tug gently. Either black tube fits either FLAVOR port.

Lay the filter flat. Keep long tubes in easy, coiled curves.

TURN IT ON

4 Connect the cylinder




Hand-tighten the red tube's brass nut onto the regulator's bottom outlet. Keep the fitted regulator on the cylinder.

Leak or continuing hiss? Close water and cylinder; get help.


5 Water, then gas, then power

1 WATER

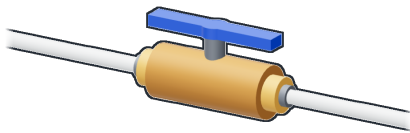


Open the cold supply **slowly**. Watch every water joint for a **full minute**.

2 GAS

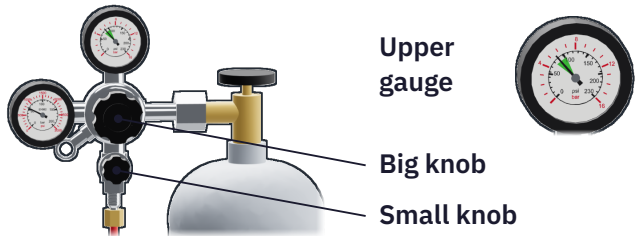

Open the cylinder and **small knob**. Use the **big knob** to set the upper needle in **green**. Check the brass nut and red CO2 port for leaks **before power**.

3 POWER

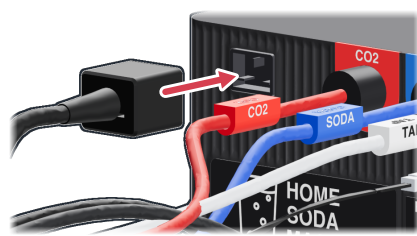

Seat the cord in the **top-left rear socket**. Plug into grounded 120 V. **It chimes.**


YOUR FIRST GLASS

6 Fill both flavors

On the enclosure display, choose **FILL** and select a flavor.

Invert one whole **14.8 fl oz bottle** into the funnel. Then press **START FILL**.

Wait for Filled. Repeat for the second flavor.

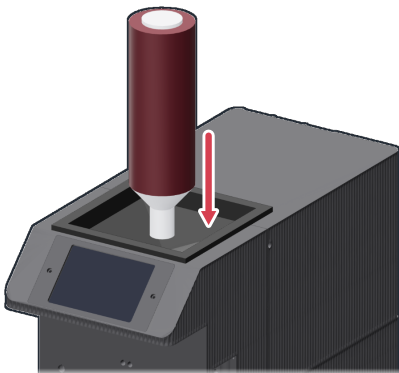

7 Chill. Choose. Pour.

FIRST CHILL: ABOUT 1 HOUR

Choose: tap the faucet display to select a flavor. A dim screen takes one tap to wake.

Pour: place a glass under the faucet and press the lever. Release it to stop.

