HOME SODA MACHINE

Install guide



From the box
to your first glass.

SEVEN STEPS. EVERY CONNECTION.

homesodamachine.com

BEFORE YOU START

Your first glass starts here

Keep this booklet beside you while you install. Follow the seven steps in order.



Make the connections.

Start with the faucet and cold-water supply. Match each tube to its color on the back of the machine.

Fill both flavors.

Use one concentrate bottle for each reservoir. The display walks you through Fill.

Then chill, choose and pour.
The first chill takes about an hour. Fill your glass with ice before pouring.

BEFORE YOU START

Your route to soda

Follow the seven steps in order. Page numbers below refer to this booklet.

1. Mount the faucet — 5-8
2. Add the cold-water tee — 9-16
3. Match the rear connections — 17-18
4. Prepare the cylinder — 19-21
5. Water, then gas, then power — 22-24
6. Fill both flavors — 25-27
7. Chill. Choose. Pour. — 28-29

BEFORE THE FIRST CONNECTION

Check the kit and space on pages 3-4. Keep the cylinder closed and the power cord unplugged while you install.

KEEP THIS GUIDE


Care is on page 30. Connection checks are on pages 31-32.

BEFORE YOU START


Have everything ready

Unpack the kit. Have your own supplies ready before opening a water connection.


IN THE BOX




Soda machine




Faucet + mounting plate

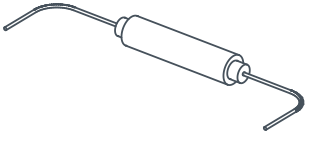


Filtered water line




Both water tees




Regulator + CO2 tether + nylon washer

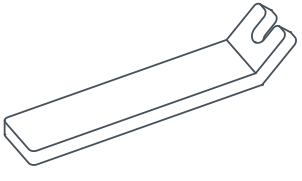

Collet press

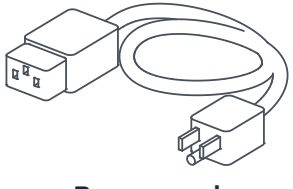

Power cord

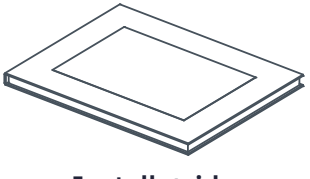

Install guide



Cold kit


Keep bagged for later.

YOU SUPPLY

- [ ] Filled 5 lb CO2 cylinder (CGA-320)
- [ ] Concentrate for both flavors (SodaStream compatible)
- [ ] Adjustable wrench
- [ ] Second wrench for a braided hose
- [ ] Towel
- [ ] Prepared counter opening
- [ ] Grounded 120 V outlet

Make room under the counter

Leave the cylinder valve, water shutoff and power plug easy to reach.

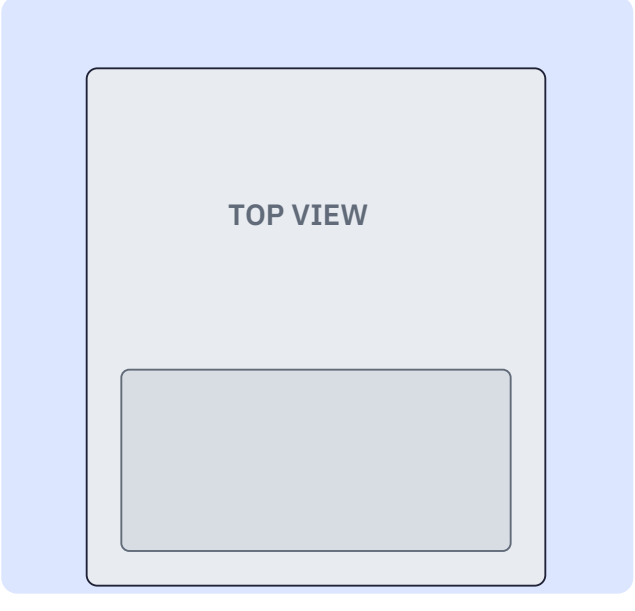

Front

Machine envelope

8-1/2 in wide
18-3/8 in deep
14-3/8 in tall, with cover


Leave **2-3/8 in behind** and **1-5/8 in on each side.** Keep the side air paths open.

Above: room to tip a bottle just past level over the funnel.

Beside it: space for the cylinder, about 5-1/4 in across and 18 in tall, plus its regulator.

Prepare the counter opening

1

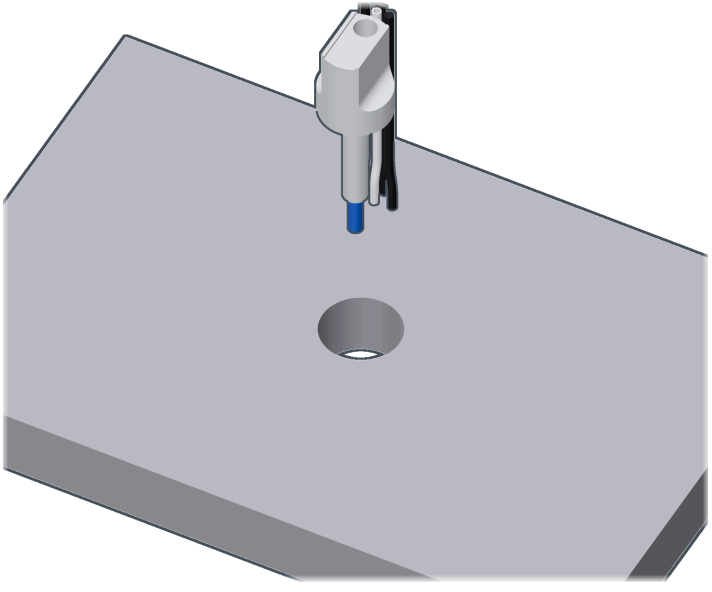

Prepare the opening before lowering the faucet.

One 1-3/8 in opening


Place the hole center **at most 2 in behind the bowl edge.** Aim the faucet into the bowl, within 10 degrees of straight ahead.

STONE COUNTER

Use a spare 1-3/8 in sink or counter hole, or a 1-3/8 in diamond core bit kept wet.

Lower. Then push back.

1

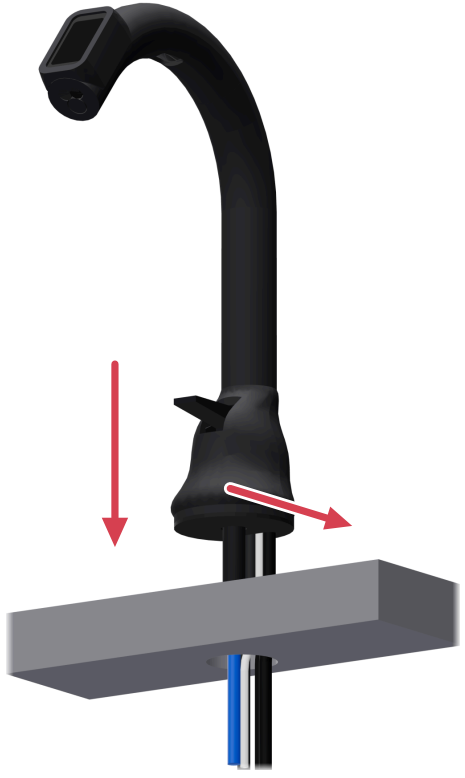

1 / LOWER

Feed the tails through

Pass all four attached tubes and the display cable through the opening. The small white tube is DRAIN. Lower the faucet onto the counter.


2 / POSITION

Push the faucet back

Push it away from you until the rear tube bundle meets the back edge of the hole. Hold that position for the plate.

Slide the plate into place

1

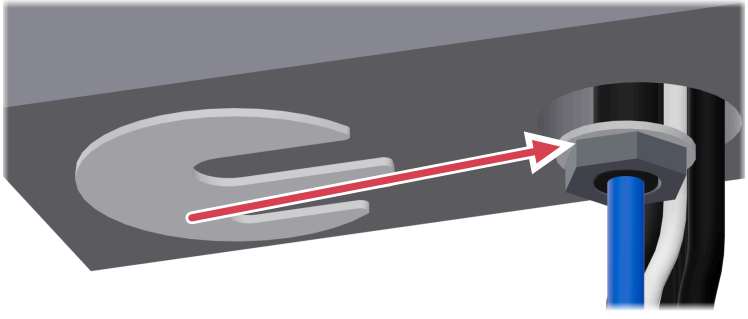

The plate sits above the washer and nut.

3 / FROM BELOW


Hold the plate flat

Hold the steel plate flat against the counter, above the washer and nut. Slide it onto the shank and rear bundle.

Match the slots as shown below.

Back / toward wall

Plate seen from below; washer and nut omitted.

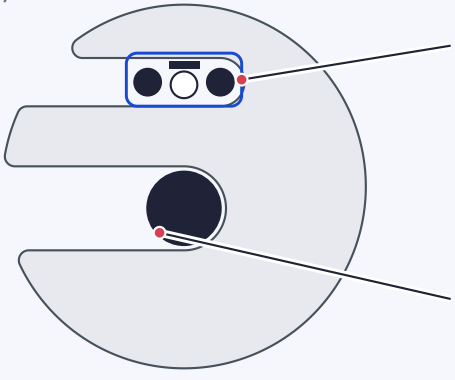

BACK / NARROW SLOT


- ●● **Both black flavor tubes**
- ○ **White DRAIN tube**
- ▬ **Flat display ribbon**

FRONT / WIDE SLOT

Shank; blue SODA connects below.

Tighten the faucet nut

1

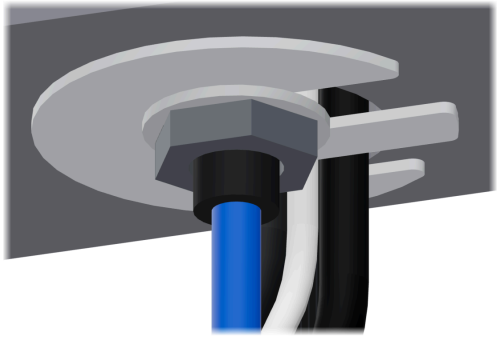

The plate stays above the washer and nut.

4 / SECURE

Hand-tighten the nut

Keep the plate flat against the counter and the faucet pushed back. Hand-tighten the nut against the washer.

Keep the neck-joint drain opening entirely over the bowl and uncovered.

Back / toward wall

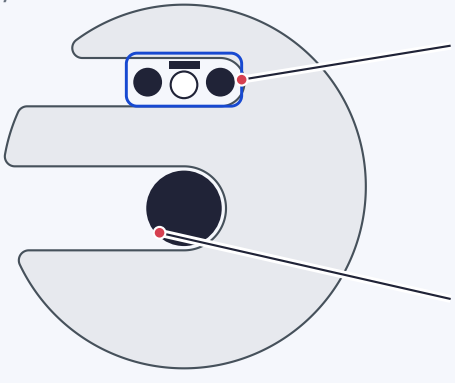


Plate seen from below; washer and nut omitted.

BACK / NARROW SLOT

- ●● **Both black flavor tubes**
- ○ **White DRAIN tube**
- ▬ **Flat display ribbon**


FRONT / WIDE SLOT

Shank; blue SODA connects below.

Which water connection?

2


Look at the cold supply under your sink. Use the tee that matches it.

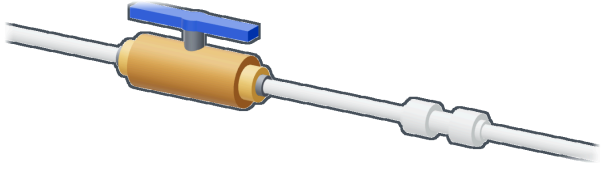

1/4 in plastic tube

A small tube in a push fitting, like a filter or refrigerator line. Use the **black tee**.

Continue on pages 10-12

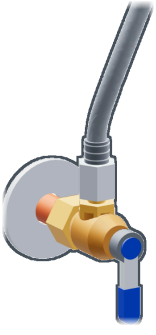


Braided hose

A braided supply hose threaded onto a **3/8 in shutoff**. Use the **white tee**.

Continue on pages 13-16

Close the cold-water shutoff

2

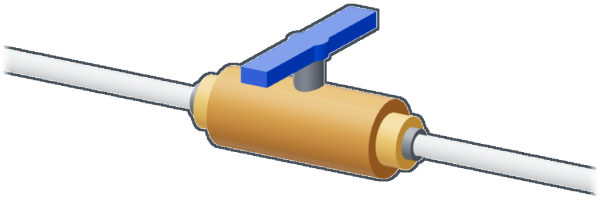

Keep the shutoff closed while making connections.

1 / WATER OFF


Wait for flow to stop

Close the cold-water shutoff. Run the tap or dispenser on that line until flow stops.

Put a towel beneath the fitting to catch the water left in the tube.

Release the original tube

2

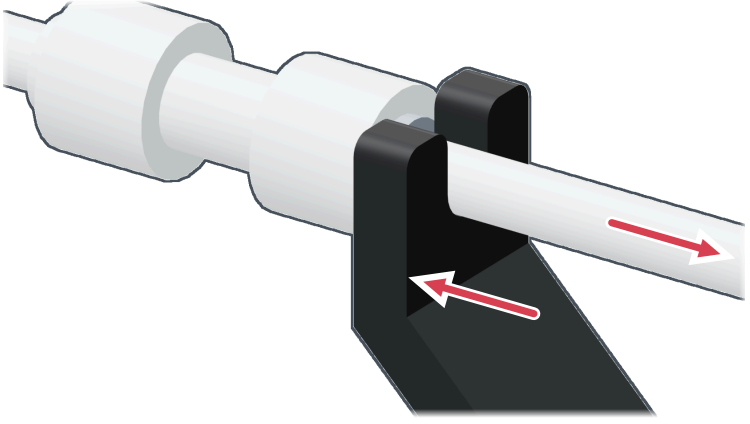

2 / RELEASE

Hold the ring in


Use the collet press to hold the fitting's release ring in. With your other hand, pull the original white tube out.

KEEP THE TOOL

The collet press also releases the machine's push-connect tubes when their pressure has been relieved.

Fit the black tee


2

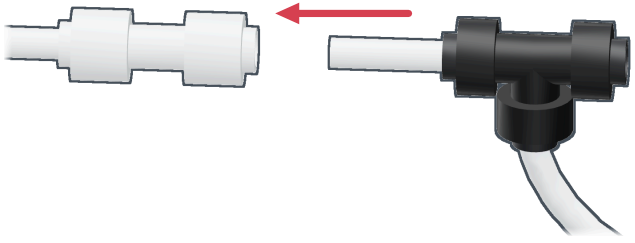

3 / JUMPER

Push it fully home

Push the short jumper on the supplied black tee into the fitting you opened.

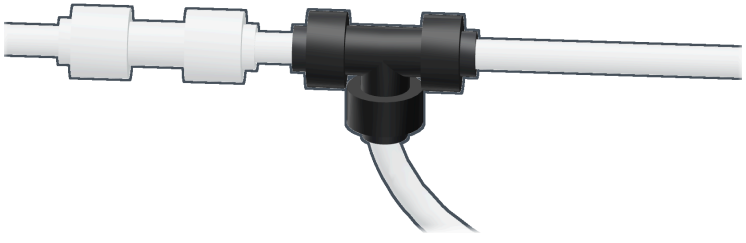

4 / ORIGINAL TUBE


Reconnect. Then tug.

Push the original tube into the tee's open end. Tug both joints gently to check they hold.

Keep the filtered white run attached. Go to page 17.

Prepare the braided-hose connection

2

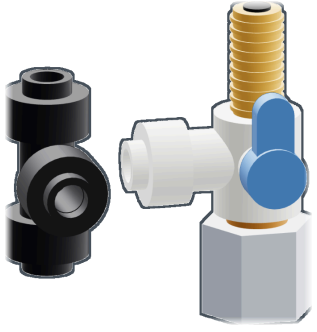

The white tee has a side-port lever.

1 / FIND COLD

Trace the hose to its valve


The white tee fits a 3/8 in outlet. Close that valve, then open the kitchen faucet on cold. Wait for flow to stop.

BEFORE LOOSENING


If water keeps flowing, leave the hose connected; the shutoff needs repair. Put a towel below the connection.

Lift the braided hose clear

2

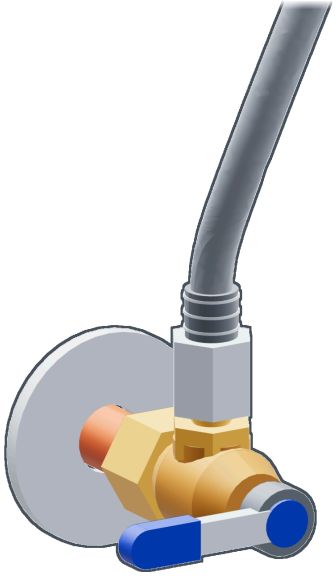

Valve closed

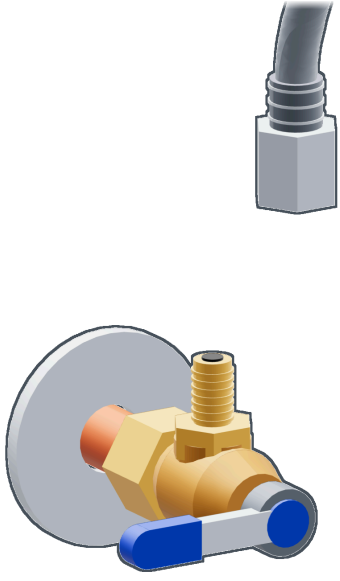

Hose lifted clear

2 / TWO WRENCHES


Hold the valve steady

Use one wrench on the valve body while the other loosens the hose nut. Keep the valve from twisting on its pipe.

Finish unscrewing the nut by hand. Lift the hose away and catch the water left in it.

Fit the white tee

2

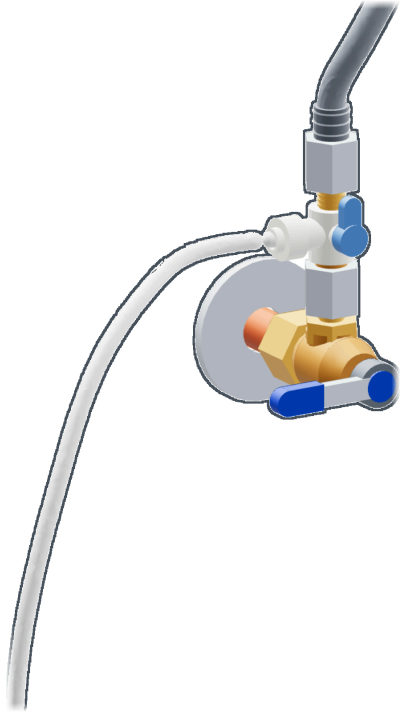

3 / TEE ONTO VALVE

Start the lower nut by hand

Thread the tee's lower nut onto the shutoff outlet. Keep the valve body steady.

4 / HOSE ONTO TEE

Reconnect the braided hose

Start the hose nut on the tee's top by hand. Hold the tee steady and nip both joints up: snug, then a little more.

Move the white filtered run

2



Keep the filter and its tube collar on the run.

5 / MOVE THE RUN

Release it from the black tee

Use the collet press on the black tee's branch. Its short jumper and the black tee are not used on this path.

Push the filtered white run fully into the white tee's side port, then tug gently. Leave the small side-port lever open.

Keep the main shutoff closed.

Match the rear connections

3



Pull off the **CO2 and TAP shipping caps.** They cover the fittings; leave the fittings mounted.

CO2

Top left / red tube from the cylinder

TAP

Top right / larger white filter tube

SODA

Middle left / blue faucet tube

DRAIN

Bottom left / small white 4 mm tube

FLAVOR

Right column / black tubes; either port

Push home. Then tug.

3



Push straight into the fitting, all the way to its stop.

CHECK EVERY TUBE

Push to its stop


Match each tube label to its port. A fitting can grip before the tube reaches the seal. Push fully home, then tug gently.

Click the faucet cable into DATA.

Leave the DRAIN tube at its factory length. Lay the filter flat and route all tails in loose curves, clear of things that slide in and out.

Prepare the CO2 cylinder

4

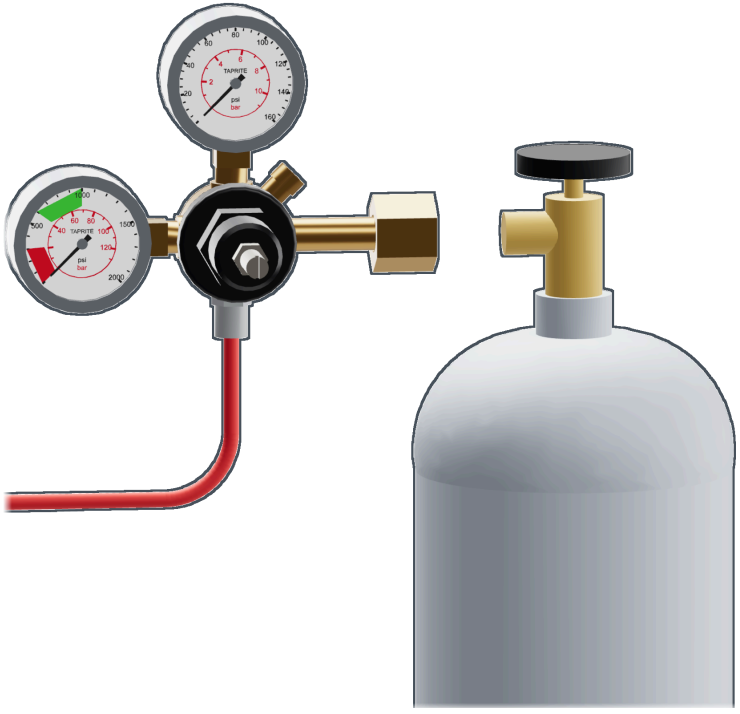

1 / CYLINDER

Stand it upright


Use a filled 5 lb cylinder with a CGA-320 connection. Stand it beside the machine with its valve closed.

PRESSURE IS ALREADY SET

The supplied regulator is set at the factory. Leave its adjusting screw and locknut alone.

Attach the supplied regulator

4

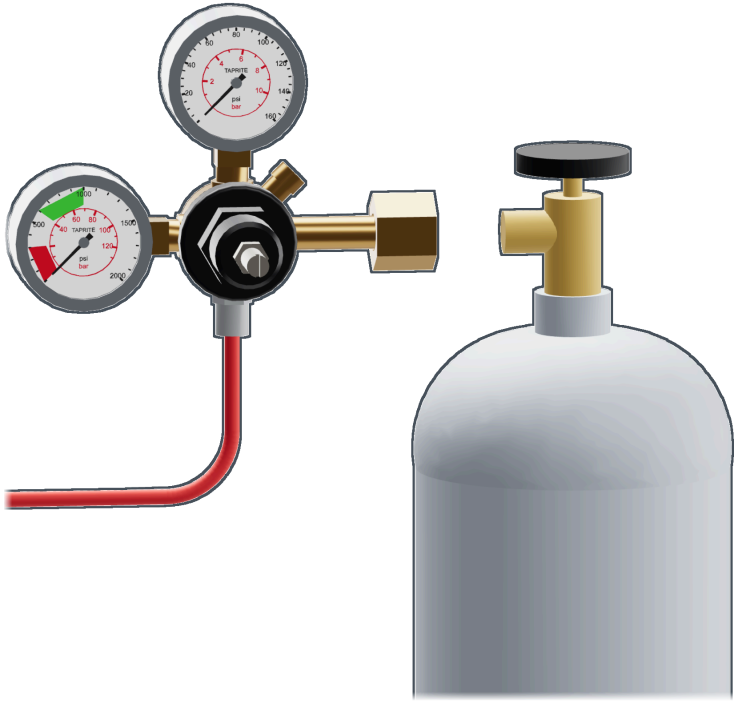

2 / CGA-320 NUT

One washer, lying flat

Place one supplied nylon washer flat inside the large nut. Start the nut squarely on the closed cylinder outlet by hand.

Snug it with the wrench. Extra force can damage the washer.

REGULATOR + TETHER

The outlet adapter and red tether arrive fitted to the regulator. Keep them assembled.

Connect the red tether

4



Keep the regulator end of the tether assembled.

3 / CO2 PORT

Red tube to red fitting


Push the free end of the red tether into the machine's red CO2 port. Push fully home, then tug gently.

KEEP THE CYLINDER CLOSED

Finish all connections before opening water or gas. The next pages take you through water, gas and power in that order.

First, open the water

5

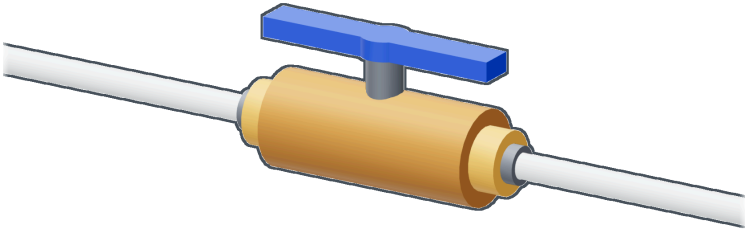

Plastic-tube valve: its open handle follows the tube.

1 / WATER

Open the shutoff slowly

On the braided-hose path, check that the white tee's small side-port lever is open too.


Watch for a full minute.
Inspect the tee, filter ends and TAP connection. Keep power unplugged.

IF YOU SEE WATER

Close the shutoff. Resolve the leak before opening gas or connecting power. See page 31.

Then, open the gas

5

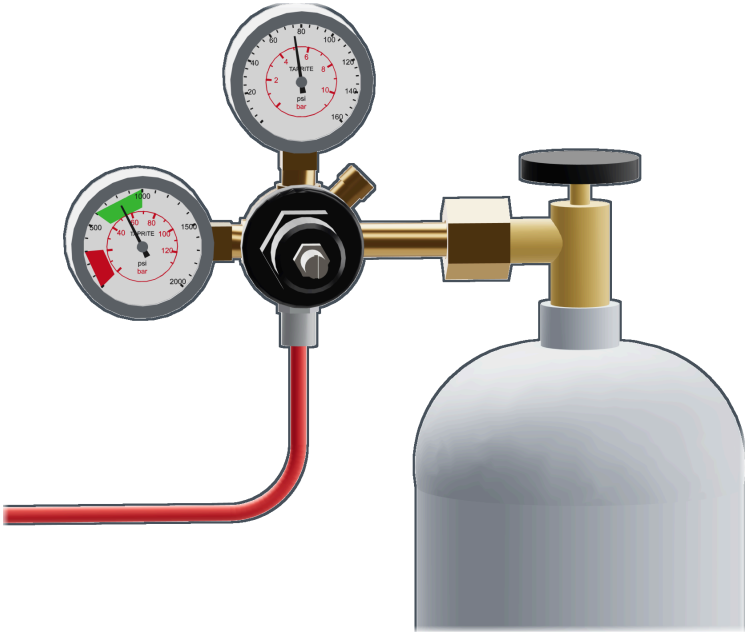

2 / GAS

Open the valve slowly

Pressure is factory set. Leave the screw alone; the upper gauge settles near 75 PSI.

Listen at the cylinder nut, outlet and red CO2 port. A continuing hiss means a leak. Soapy water shows it as growing bubbles.

BEFORE POWER

If gas continues to escape, close the cylinder. Check page 32 and retest.

Finally, connect power

5



120 V, 60 Hz; 5 A, 600 W. Keep the plug accessible.

3 / POWER

Connect the supplied cord

Push it straight into the recessed power socket at the upper right of the rear panel. Plug into a grounded 120 V outlet.


The machine chimes and both displays start. Follow them if they report an issue.

THEN, AT THE FAUCET

Hold the lever down until the faucet display says Done. Gas hisses while the tank clears its air.

Choose the flavor to fill

6

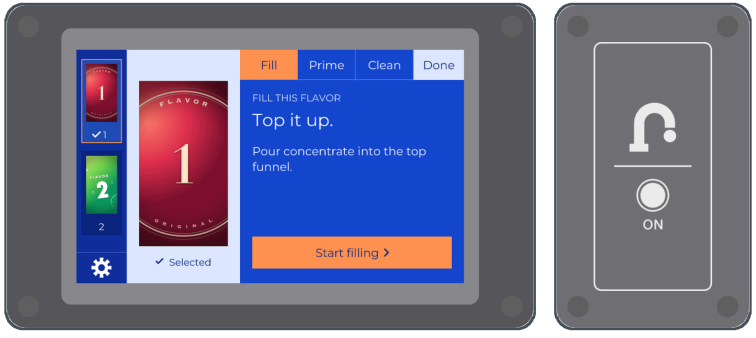

Flavor 1 is selected. Fill and Start filling are separate controls.

1 / CHOOSE

Tap a flavor on the left

The large portrait shows the reservoir you selected.

2 / OPEN FILL

Tap Fill across the top

Leave Start filling alone until the concentrate is in place on the next page.

Bottle first. Then start.

6



3 / ADD CONCENTRATE

Lift off the funnel cover

Wipe off water and debris. Lift by the front edge, then tip one whole 14.8 fl oz (440 mL) bottle just past level over the funnel until it empties.

4 / START

Tap Start filling

Let the machine draw the concentrate into the selected reservoir.

Wait for Filled. Then repeat.

6



5 / FILLED

Replace the funnel cover

When the display says Filled, the concentrate is in the reservoir. Press the cover down until it rests evenly on the brim.

6 / OTHER FLAVOR

Repeat the same sequence

Select the other image, open Fill, lift off the cover, pour in its bottle, then tap Start filling.

Allow the first chill

7



FIRST CHILL

About 1 hour

Let the machine chill before your first pour.

READY FOR YOUR GLASS

Keep the water and cylinder supplies open. Choose your flavor at the faucet when you are ready to pour.

Choose. Ice. Pour.

7



1 / CHOOSE

Tap the faucet display

Select a flavor. If the display is dim, the first tap wakes it.

2 / POUR

Fill your glass with ice

Put it under the faucet and press the lever down. Release the lever to stop.

Keep it ready

Top up a flavor

Use the Fill sequence on pages 25-27. If the display says **Full**, concentrate remains in the funnel. Add no more and replace the cover.

Change a flavor

Fill the funnel with water first. Then select the old flavor, open Clean and tap Start cleaning; the water rinses the line below the funnel. When it finishes, fill the new flavor.

Rinse the funnel

Rinse weekly and after changing flavors. Wash the removable silicone funnel and both faces of its cover by hand.

Wipe the cover and lift it by its front edge. When the funnel is empty, lift it straight out. Its plug slides off the drain tube; the tube stays in the machine.

To refit, align the plug in its socket and press down until the brim seats. Press the cover evenly onto the brim.

Filter: replace yearly; relieve the white line's pressure as on page 31 first. Cylinder: refill when its left gauge reaches the red band. Keep the spare nylon washer for the refill. To move the machine, tap Move the machine in System status; it guides you.

Check a leaking water connection

FIRST, CLOSE THE SUPPLIES

Close the water shutoff and cylinder valve. Unplug the machine. Leave pressurized connections assembled.

White TAP line

Run the tap or dispenser on that same cold-water line until flow stops. Keep the white tee's side lever open, if used.

Blue SODA line

Press the soda lever over a jug until water and hissing stop.

After pressure is released

Hold the release ring in with the collet press. Pull out the tube and check for dirt or damage. Push an undamaged tube fully to its internal stop, then tug gently.

Gas and first-pour checks

Gas at a connection

Close the cylinder valve. Growing bubbles in soapy water locate a leaking joint.

Leave the regulator and red tether assembled until depressurized. Do not loosen a fitting to let pressure out.

Then check the nut's flat nylon washer and fully seat both red-tube ends. See pages 20-21.

After repair, repeat the water and gas checks on pages 22-23 before connecting power.

No pour

Check the water shutoff and the white tee's side-port lever.

No power

Check the cord and outlet, then read any display message.

Warm pour

Allow about an hour for the first chill.

HOME SODA MACHINE



On tap.

Keep this guide
with your install kit.

Sealed cooling circuit
R-600a (isobutane), flammable refrigerant.
Under 1.5 oz (40 g). Do not open, puncture or heat.

homesodamachine.com

Guides: /drawings