SIDE VIEW

SCALE 1:1

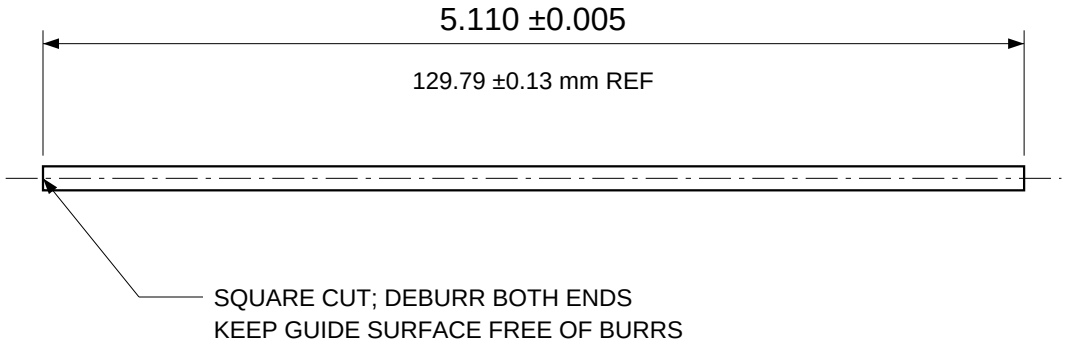

END VIEW

SCALE 4:1



FINISHED PART REQUIREMENTS

1. Material: 316 stainless round rod. Stock: Tandefio B0CY4DWJFQ, nominal 1/8-inch x 12-inch sticks. Select stock meeting the stated diameter tolerance.

2. Length is the FINISHED overall length after cutting and deburring. Cut both ends flat and square to the rod axis within 0.5°. Remove burrs; edge break 0.003 MAX. Keep the sliding surface free of burrs, chips and cutting fluid.

3. Assembly interface: cap inside faces 5.000 ±0.010 apart AT THE ROD AXIS; registers coaxial, per CV-WLD-01. Registers per END-CAP-01: Ø9/64, 0.100 ±0.005 TO DRILL TIP; point 135° ±0.5°. Flat rod ends seat above the drill tip.

4. Seat the rod in the bottom register and tack to the bottom cap. Before top closure, verify top-register engagement and full cap seating; verify free float travel. Maintain the specified cap spacing; rod length is controlled by this drawing.

5. Quantity: one per carbonator. Reservoir rods are separate parts. Rod tack and vessel assembly follow the pressure-vessel procedure, steps 2-5.

ALL DIMENSIONS APPLY TO THE FINISHED, DEBURRED PART. INCH DIMENSIONS GOVERN.

HSM-0336

DIMENSIONS GOVERN.

DO NOT SCALE.

PRINT AT 100%

FOR STATED SCALES.

REF = REFERENCE

HOME SODA MACHINE

CARBONATOR FLOAT GUIDE ROD

FINISHED PART

DESIGN DEFINITION

MATERIAL	UNITS	QUANTITY
316 STAINLESS STEEL	**INCHES**	**1 PER CARBONATOR**

DRAWING	REV	DATE	SCALE	SHEET
FR-CARB-01	**B**	**2026-10-26**	**AS SHOWN**	**1 OF 1**