FINISHED ROD - SIDE VIEW

SCALE 1:1

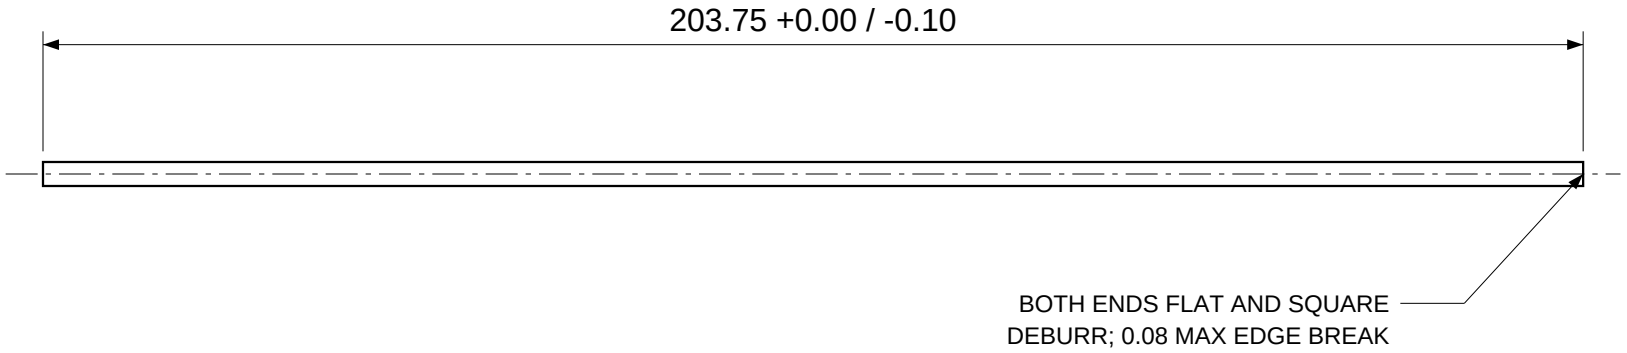

FINISHED PART AND ASSEMBLY REQUIREMENTS

1. Material: 316 stainless round rod. Use stock meeting the diameter limits; stock must be longer than the finished cut. Quantity: two identical rods per cold core, one per flavor reservoir.

2. Length applies after cutting and deburring. Ends flat; each square to the axis within 0.5°. Edge break 0.08 MAX. Sliding surface free of raised burrs, sharp ridges and embedded debris; remove cutting fluid.

3. Centerline departure from a straight line joining the end centers: 0.10 MAX over the full length. Verify free travel through the actual float's complete stroke.

4. Reservoir interface: Ø3.475 nominal seat bores; lower seat to upper seat 203.90 REF. At nominal seats, this rod's length limits leave 0.15-0.25 REF axial clearance.

5. Seat lower end in the body boss and capture upper end in the cap boss; no weld. With the gasket and cap fully seated, verify 0.05-0.50 total axial endplay. Correct out-of-limit seats; retain the specified rod length. The rod must not hold the cap off its gasket.

END VIEW

SCALE 4:1



SAME PART FOR A AND B

HSM-0339

mm DIMENSIONS GOVERN.

DO NOT SCALE.

REF = REFERENCE.

PRINT AT 100%
FOR STATED SCALES.

HOME SODA MACHINE **RESERVOIR FLOAT GUIDE ROD**				**FINISHED PART** DESIGN DEFINITION
MATERIAL **316 STAINLESS STEEL**		UNITS **MILLIMETERS**	QUANTITY **2 PER COLD CORE**	
DRAWING **FR-RES-01**	REV **A**	DATE **2026-10-27**	SCALE **AS SHOWN**	SHEET **1 OF 1**