

Quick start

From the box to your first glass.

HAVE READY


A **1-3/8 in counter hole**, cold water and grounded **120 V**. A filled **5 lb CO2 cylinder** and an adjustable wrench for the regulator's nut. Two **14.8 fl oz** bottles of SodaStream-compatible concentrate.

Place the appliance: 1-5/8 in clear at each side, 2-3/8 in behind, and room above to invert a bottle into the funnel.

INSTALL

Cylinder closed. Power unplugged.

1 Mount the faucet

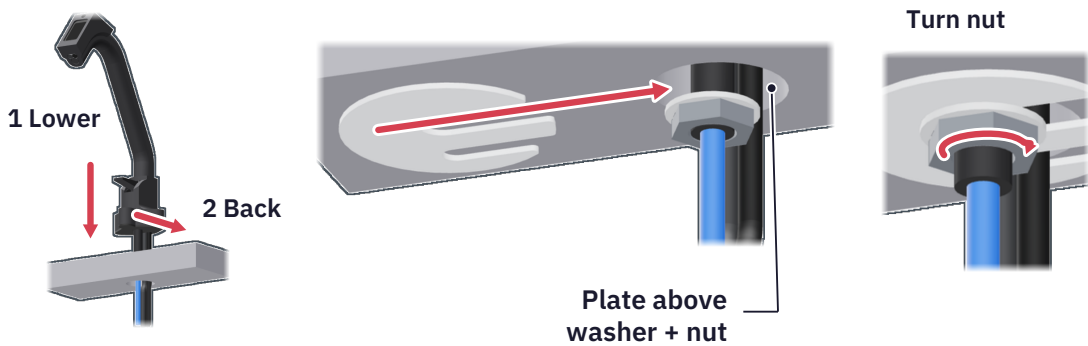


Feed the attached tubes and cable through the hole. Lower the faucet, then **push it back** until the black tubes meet the back of the hole.


From below, slide the steel plate **above the retained washer and nut**. Wide slot around the shank; narrow slot around the black tubes. **Hand-tighten the nut**.

2 Add the cold-water tee


1/4 in plastic tube? Use the black tee below.
Braided hose? Follow install guide pp. 9-11, then return at **Step 3**.



Close the cold-water shutoff. Run the cold tap until it stops. Put a cup and towel under the fitting.




Push the collet press against the release ring and hold. With your other hand, **pull the white tube out**.



Push the tee's short tube into that fitting. Reconnect the original tube to the tee's open end. The white filtered run is already attached.

3 Match the rear connections

Pull off the CO2 and TAP shipping caps. Caps fit over the outside of the fittings. Leave the fittings in place.

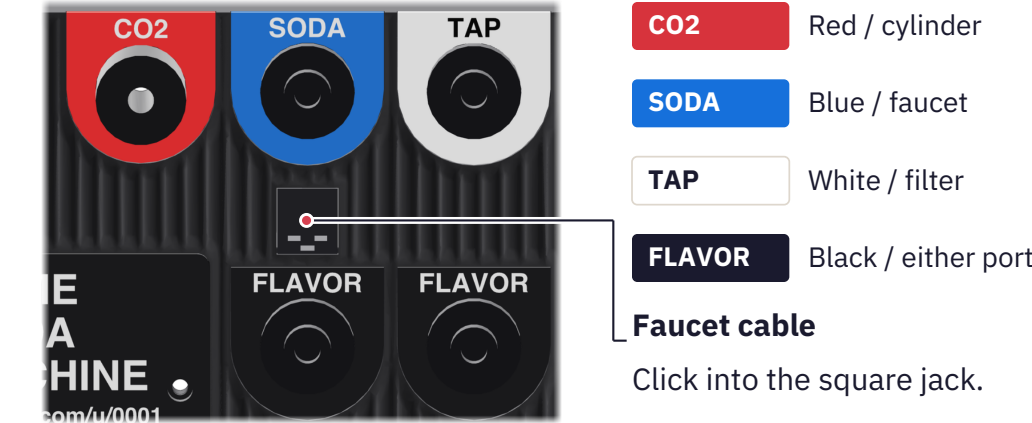


Push every tube fully home (a little over 1/2 in), then tug gently. Either black tube fits either FLAVOR port.

Lay the filter flat. Keep long tubes in easy, coiled curves.

TURN IT ON


4 Prepare the cylinder

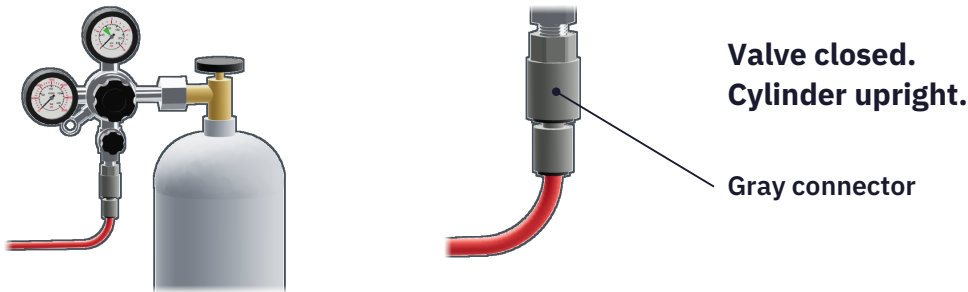

Washer in the big nut. Start it on the valve by hand, then nip it up with the wrench. Screw the gray connector onto the bottom outlet hand-tight. Keep the two gray fittings assembled. **Leak or continuing hiss? Close water and cylinder; get help.**


5 Water, then gas, then power

1 WATER

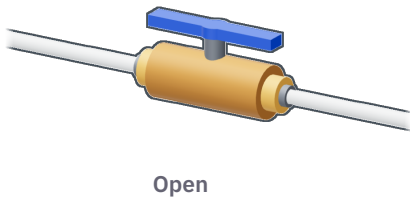


Open the water shutoff **slowly**. Watch every water joint for a **full minute**.

2 GAS

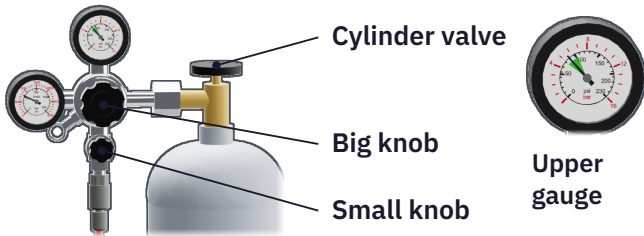

Open the **cylinder valve** and **small knob**. Use the **big knob** to set the upper needle in **green**. Listen at the nut, gray connector and red CO2 port **before power**: a hiss is a leak.

3 POWER

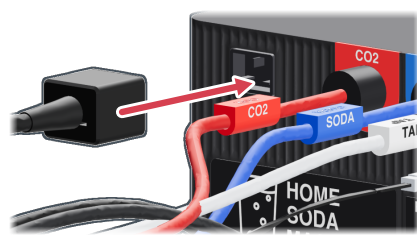

Seat the cord in the **top-left rear socket**. Plug into grounded 120 V. **It chimes**.


YOUR FIRST GLASS

6 Fill both flavors

On the enclosure display, choose **FILL** and select a flavor.

Invert one whole **14.8 fl oz bottle** into the funnel. Then press **START FILL**.

Wait for Filled. Repeat for the second flavor.

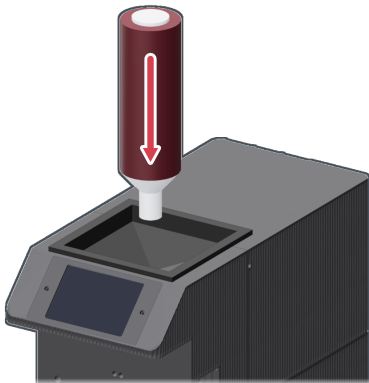

7 Chill. Choose. Pour.

FIRST CHILL: ABOUT 1 HOUR

Choose: tap the faucet display to select a flavor. A dim screen takes one tap to wake.

Pour: place a glass under the faucet and press the lever. Release it to stop.

