

HOME SODA MACHINE

Quick start

From the box
to your first glass.

HAVE READY


A **1-3/8 in counter hole**, cold water and grounded **120 V**. A filled **5 lb CO2 cylinder** and an adjustable wrench for the regulator's nut. Two **14.8 fl oz** bottles of SodaStream-compatible concentrate.

MAKE ROOM

1-5/8 in clear at each side, 2-3/8 in behind, and room above to invert a bottle into the funnel.

INSTALL

1 Mount the faucet

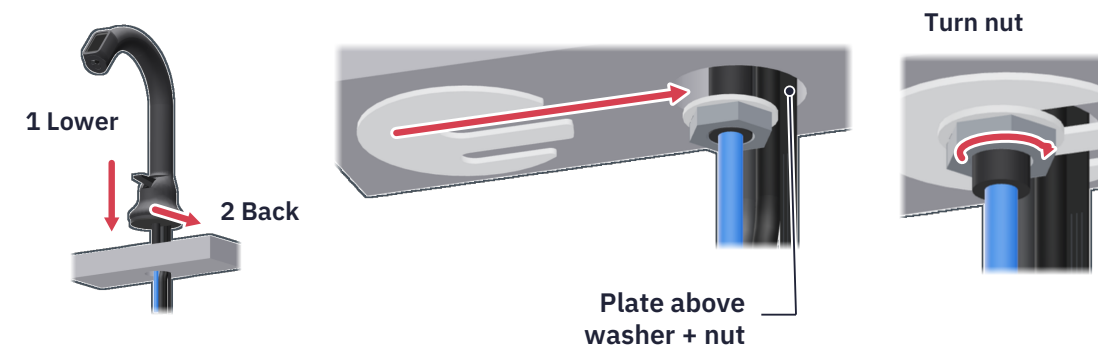


Feed the attached tubes and cable through the hole. Lower the faucet, then **push it back** until the black tubes meet the back of the hole.

From below, slide the steel plate **above the retained washer and nut**. Wide slot around the shank; narrow slot around the black tubes and cable. **Hand-tighten the nut.**

2 Add the cold-water tee

1/4 in plastic tube? Use the black tee below.
Braided hose? See install guide pp. 9-11, then return at **Step 3**.

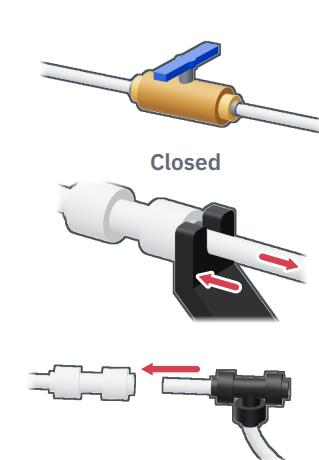

Close the cold-water shutoff. Run the tap or dispenser on that line until flow stops. Put a cup and towel under the fitting.

Push the collet press against the release ring and hold. With your other hand, **pull the white tube out.**

Push the tee's short tube into that fitting. Reconnect the original tube to the open end. Leave the filtered run attached.

3 Match the rear connections

Pull the CO2 and TAP shipping caps off the soda machine.

Caps fit over the outside of the fittings. Leave the fittings in place.



CO2 Red / cylinder
SODA Blue / faucet
TAP White / filter
FLAVOR Black / either port

Faucet cable


Click into the square jack.

Push every tube fully home (a little over 1/2 in), then tug gently. Either black tube fits either FLAVOR port.

Lay the filter flat. Keep long tubes in easy, coiled curves.

TURN IT ON

4 Prepare the cylinder

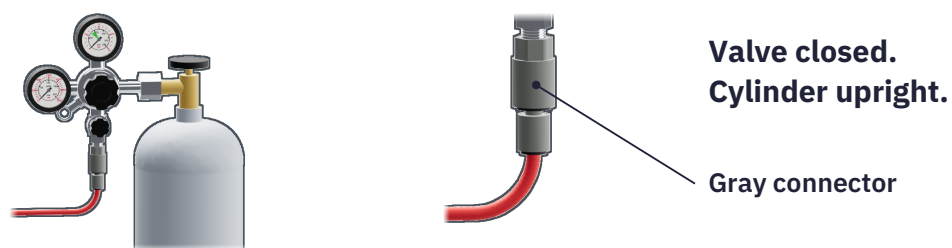


Washer in the big nut; start by hand, nip up with the wrench. Gray connector onto the bottom outlet hand-tight, both fittings left assembled.

Leak or hiss? Close water and cylinder. See guide, p. 23.


5 Water, then gas, then power

1 WATER




Open the water shutoff **slowly**. Watch every water joint for a **full minute**.

2 GAS

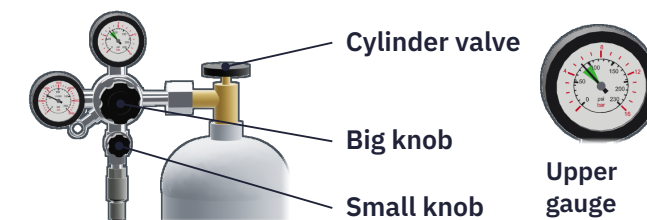

Open the **cylinder valve** and **small knob**. Use the **big knob** to set the upper needle in **green**. Listen at the nut, gray connector and red CO2 port **before power**: a hiss is a leak.

3 POWER

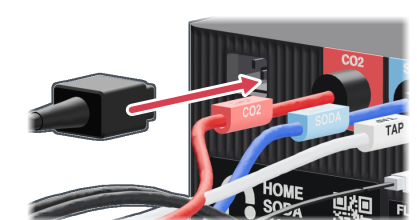

Seat the cord in the **top-left rear socket**. Plug into grounded 120 V. **It chimes.**


YOUR FIRST GLASS

6 Fill both flavors

On the machine display, **tap a flavor on the left**, then open **Fill**.

Lift off the **funnel cover**. Invert one whole **14.8 fl oz bottle** into the funnel. Tap **Start filling**.

Wait for Filled, then press the cover back on. Repeat for the other flavor.

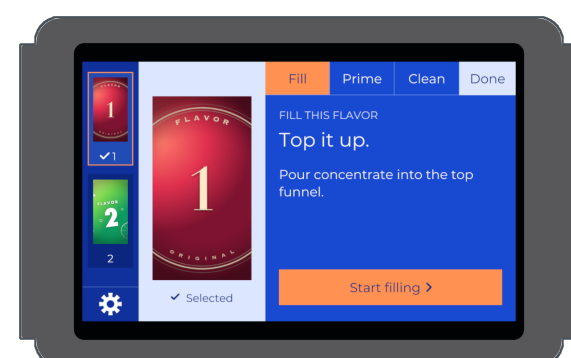

7 Chill. Choose. Pour.

FIRST CHILL: ABOUT 1 HOUR

Fill your glass with ice.

Choose: tap the faucet display for a flavor. Tap once to wake a dim screen.

Pour: put it under the faucet. Press the lever; release to stop.

