## INSIDE FACE VIEW

SCALE 1:1




## SECTION A-A

SCALE 1:1 - THREADS SHOWN CONVENTIONALLY

## SECTION B-B

LOCAL VIEW AT R1 - SCALE 4:1

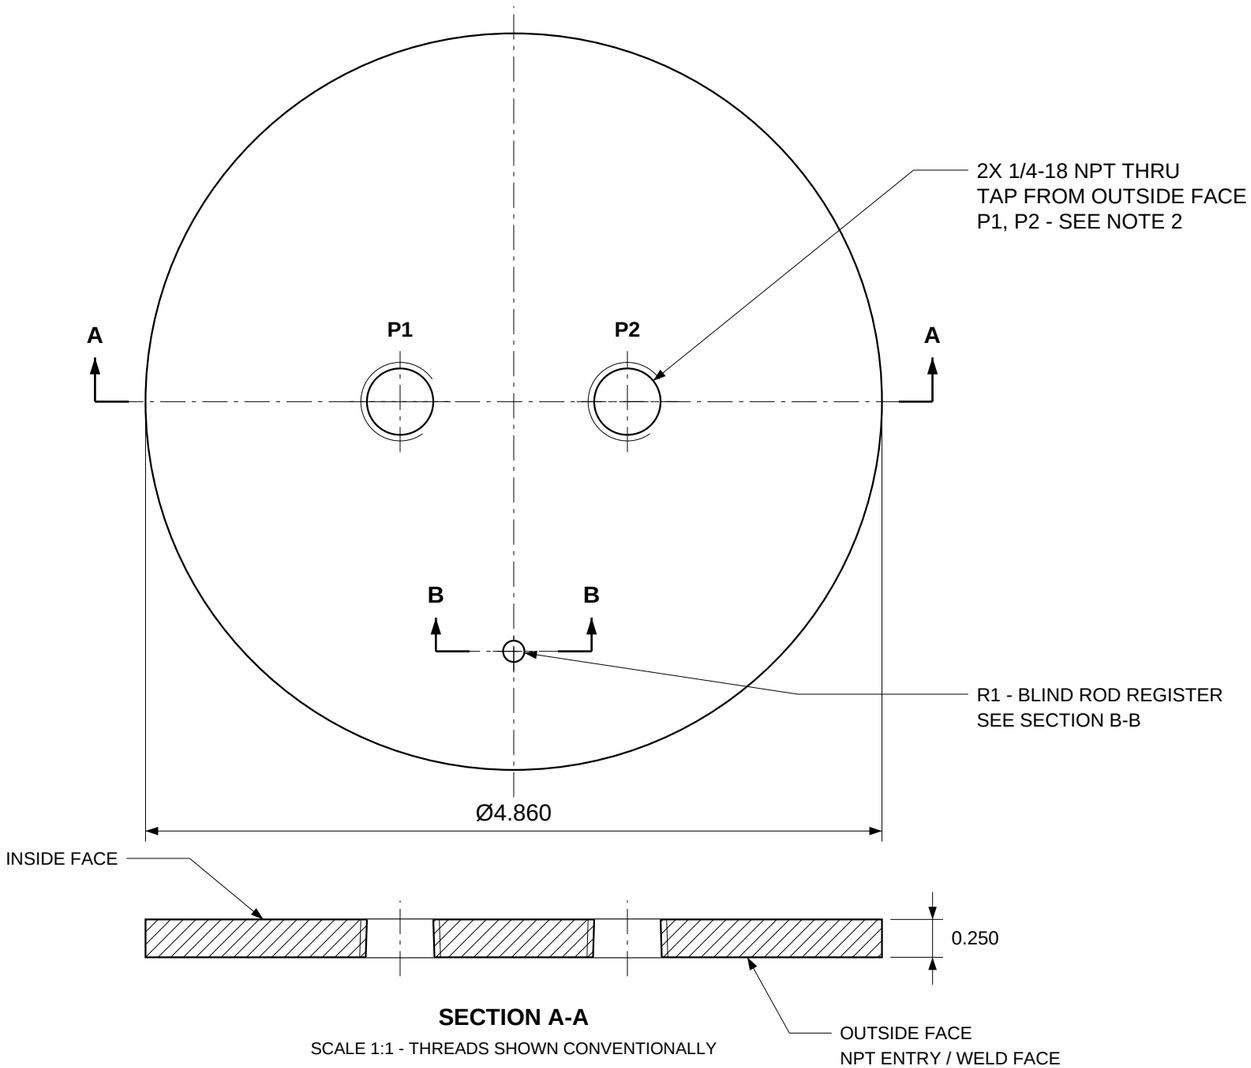


135° DRILL POINT

**DO NOT BREAK THROUGH**

### FEATURE LOCATIONS

| FEATURE | X | Y | DESCRIPTION |
|---|---|---|---|
| **P1** | -0.750 | 0.000 | THREADED PORT |
| **P2** | 0.750 | 0.000 | THREADED PORT |
| **R1** | 0.000 | -1.648 | BLIND ROD REGISTER |

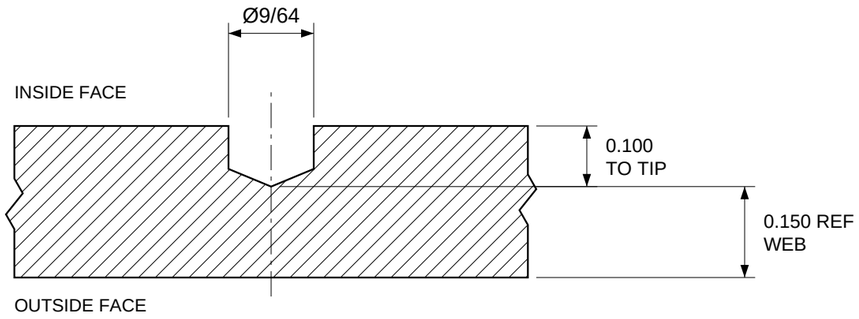ORIGIN: DISC OD CENTER. +X RIGHT; +Y UP IN INSIDE FACE VIEW.
COORDINATES LOCATE FEATURE AXES. HOLE AXES NORMAL TO FACES.

### FABRICATION NOTES

1. BLANK: ENDCAP-CIRCULAR-2HOLE.DXF; TWO Ø0.438 LASER-CUT PILOTS.
2. CLEAR THE CUT LIP ON BOTH PORT FACES WITH AN 82° COUNTERSINK BEFORE TAPPING. NPT FORM: ASME B1.20.1. TARGET 4.5 TURNS ENGAGEMENT; VERIFY ELBOW FIT AND FINAL CLOCKING ON A TRIAL PART PER PRESSURE-VESSEL PROCEDURE, STEP 1.
3. R1 IS BLIND. TOP CAP ONLY: Ø5/32 AT THE SAME TIP DEPTH IS PERMITTED IF NEEDED FOR ROD-TIP FIT. BOTH CAPS START AT Ø9/64.
4. OD: CHAMFER THE INSIDE EDGE FOR INSERTION. OUTSIDE EDGE: REMOVE BURR ONLY; PRESERVE THE SQUARE CLOSURE-WELD CORNER.
5. REMOVE BURRS, CHIPS AND CUTTING FLUID. ROD TACK AND VESSEL WELDS: PRESSURE-VESSEL ASSEMBLY PROCEDURE.

**UNLESS OTHERWISE SPECIFIED**

LINEAR ±0.005 IN ANGULAR ±0.5°

REFERENCE DIMENSIONS ARE IDENTIFIED BY REF.

**DIMENSIONS GOVERN. DO NOT SCALE THE DRAWING.**

ANSI B / 17 x 11 IN. PRINT AT 100% FOR THE STATED VIEW SCALES.
MACHINED CAP COMMON TO TOP AND BOTTOM; ROD TACK IS AN ASSEMBLY OPERATION.

HOME SODA MACHINE

# CARBONATOR END CAP - FINISHED

**PROTOTYPE**
FOR REVIEW

| MATERIAL | UNITS | QUANTITY |
|---|---|---|
| **316 STAINLESS STEEL** | **INCHES** | **2 PER CARBONATOR** |

| DRAWING | REV | DATE | SCALE | SHEET |
|---|---|---|---|---|
| **END-CAP-01** | **C** | **2026-10-26** | **AS SHOWN** | **1 OF 1** |