SIDE VIEW

FINISHED ROD - NOT TO SCALE

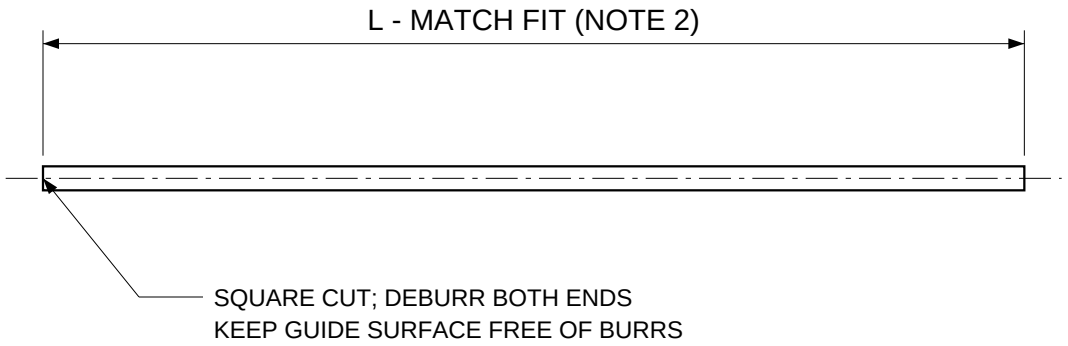

END VIEW

SCALE 4:1

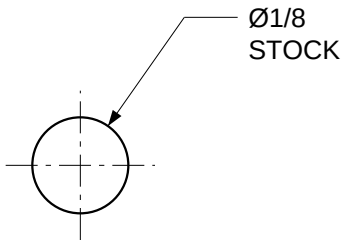

PART AND FIT REQUIREMENTS

1. Material: 316 stainless round rod, nominal Ø1/8. Purchased stock: Tandefio B0CY4DWJFQ, 12-inch sticks. Cut square and remove burrs from both ends. Remove chips and cutting fluid.

2. L is the FINISHED, MATCH-FIT length for the actual bottom/top end-cap register pair in CV-WLD-01. Start with a 5.161 in blank (131.08 mm calculated); trim to fit before tacking. The starting blank is not a finished-length acceptance dimension.

3. With the rod seated in the bottom register, its top must engage the top register while BOTH cap outside faces reach their 0.250-inch recesses. The rod must not bottom in the top register and hold that cap proud. Verify engagement and full seating with the actual caps and tube.

4. Registers are drilled 0.100 deep TO THE DRILL TIP with a 135° point (END-CAP-01). A flat rod end seats above that tip. Verify finished L with the actual register pair.

5. Rod tack and final free-sliding check with the actual float are assembly operations; see the pressure-vessel procedure, steps 2-5. This drawing applies to the CARBONATOR rod only.

FINAL LENGTH IS CONTROLLED BY THE MATCH-FIT REQUIREMENTS ABOVE.

HSM-000336

DIMENSIONS GOVERN.
DO NOT SCALE.

PRINT AT 100%
FOR STATED SCALES.
REF = REFERENCE

HOME SODA MACHINE

CARBONATOR FLOAT GUIDE ROD

PROTOTYPE
FOR REVIEW

MATERIAL	UNITS	QUANTITY
316 STAINLESS STEEL	**INCHES**	**1 PER CARBONATOR**

DRAWING	REV	DATE	SCALE	SHEET
FR-CARB-01	**A**	**2026-10-26**	**AS SHOWN**	**1 OF 1**