INSIDE FACE VIEW

SCALE 1:1

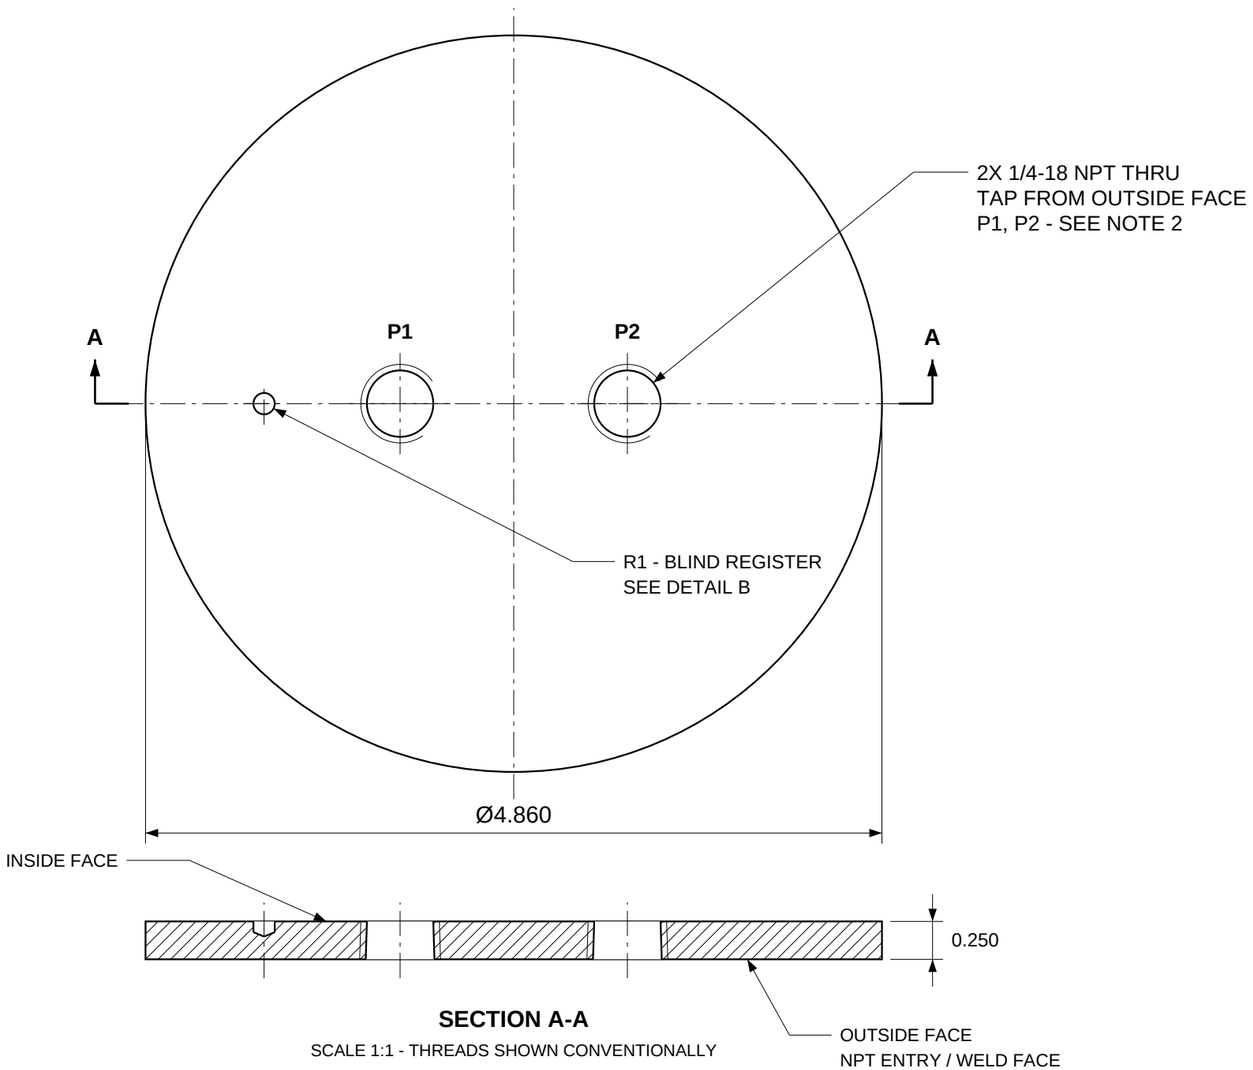

SECTION A-A

SCALE 1:1 - THREADS SHOWN CONVENTIONALLY

DETAIL B - SECTION AT R1

LOCAL VIEW AT R1 - SCALE 4:1

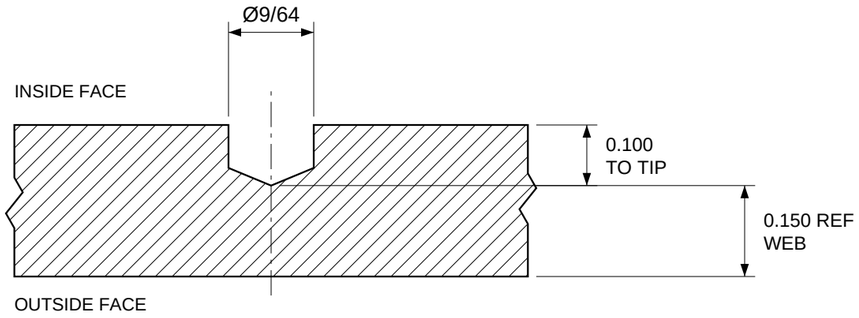

135° DRILL POINT

DO NOT BREAK THROUGH

FEATURE LOCATIONS

FEATURE	X	Y	DESCRIPTION
P1	-0.750	0.000	THREADED PORT
P2	0.750	0.000	THREADED PORT
R1	-1.648	0.000	BLIND ROD REGISTER

ORIGIN: DISC OD CENTER. +X RIGHT; +Y UP IN INSIDE FACE VIEW.
COORDINATES LOCATE FEATURE AXES. HOLE AXES NORMAL TO FACES.

FABRICATION NOTES

1. BLANK: ENDCAP-CIRCULAR-2HOLE.DXF; TWO Ø0.438 LASER-CUT PILOTS.
2. CLEAR THE CUT LIP ON BOTH PORT FACES WITH AN 82° COUNTERSINK BEFORE TAPPING. NPT FORM: ASME B1.20.1. TARGET 4.5 TURNS ENGAGEMENT; VERIFY ELBOW FIT AND FINAL CLOCKING ON A TRIAL PART PER PRESSURE-VESSEL PROCEDURE, STEP 1.
3. R1 IS BLIND. TOP CAP ONLY: Ø5/32 AT THE SAME TIP DEPTH IS PERMITTED IF NEEDED FOR ROD-TIP FIT. BOTH CAPS START AT Ø9/64.
4. OD: CHAMFER THE INSIDE EDGE FOR INSERTION. OUTSIDE EDGE: REMOVE BURR ONLY; PRESERVE THE SQUARE CLOSURE-WELD CORNER.
5. REMOVE BURRS, CHIPS AND CUTTING FLUID. ROD TACK AND VESSEL WELDS: PRESSURE-VESSEL ASSEMBLY PROCEDURE.

UNLESS OTHERWISE SPECIFIED

LINEAR ±0.005 IN ANGULAR ±0.5°

REFERENCE DIMENSIONS ARE IDENTIFIED BY REF.

DIMENSIONS GOVERN. DO NOT SCALE THE DRAWING.

ANSI B / 17 x 11 IN. PRINT AT 100% FOR THE STATED VIEW SCALES.
MACHINED CAP COMMON TO TOP AND BOTTOM; ROD TACK IS AN ASSEMBLY OPERATION.

HOME SODA MACHINE

CARBONATOR END CAP - FINISHED

PROTOTYPE
FOR REVIEW

MATERIAL	UNITS	QUANTITY
316 STAINLESS STEEL	**INCHES**	**2 PER CARBONATOR**

DRAWING	REV	DATE	SCALE	SHEET
END-CAP-01	**E**	**2026-10-28**	**AS SHOWN**	**1 OF 1**