



HOME SODA MACHINE

# Install guide

---

From the box  
to your first glass.

SEVEN STEPS. EVERY CONNECTION.

[homesodamachine.com](https://homesodamachine.com)

# Your route to soda

Use this booklet on its own, or beside the quick start. The same seven steps appear in both.

## INSTALL

- |          |                                   |       |
|----------|-----------------------------------|-------|
| <b>1</b> | <b>Mount the faucet</b>           | 5-6   |
| <b>2</b> | <b>Add the cold-water tee</b>     | 7-11  |
| <b>3</b> | <b>Match the rear connections</b> | 12-13 |

## TURN IT ON

- |          |                                    |       |
|----------|------------------------------------|-------|
| <b>4</b> | <b>Prepare the cylinder</b>        | 14-15 |
| <b>5</b> | <b>Water, then gas, then power</b> | 16-18 |

## YOUR FIRST GLASS

- |          |                             |       |
|----------|-----------------------------|-------|
| <b>6</b> | <b>Fill both flavors</b>    | 19-20 |
| <b>7</b> | <b>Chill. Choose. Pour.</b> | 21    |

### BEFORE THE FIRST CONNECTION

Check the kit and the space on pages 3-4. Keep the cylinder valve closed and the power cord unplugged while you install.

# Have everything ready

Unpack the appliance, faucet bag and install kit before opening a water connection.

## IN THE BOX

### Faucet assembly

Faucet, three attached tubes and display cable; steel under-counter plate.

### Water connections

Black tee with short jumper, long white run and inline filter; a separate white tee for a braided hose.

### Gas connections

Two-gauge regulator and red tether with two gray fittings already assembled.

### Tools and cord

Collet press and grounded power cord. Keep the bagged cold kit for later.

---


## YOU SUPPLY

A filled **5 lb CO2 cylinder**, two **14.8 fl oz (440 mL)** bottles of SodaStream-compatible concentrate, an **adjustable wrench** for the regulator nut, and a cup and towel.

The braided-hose path also needs a second wrench to hold the shutoff steady. A prepared counter hole, cold water and grounded 120 V complete the setup.

# Make room

Prepare the opening and cabinet before lowering the faucet.

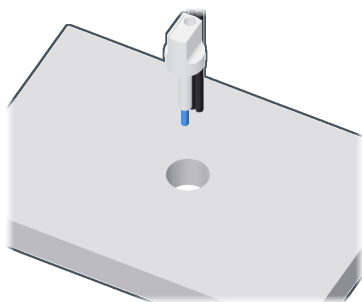


## 1-3/8 in hole

One opening through the counter.  
Counter thickness: **3/4 to 1-1/2 in.**

Have a countertop fabricator prepare a stone counter.

## Space around the appliance

8-1/2 in wide, 18-1/4 in deep, 14-1/4 in tall.

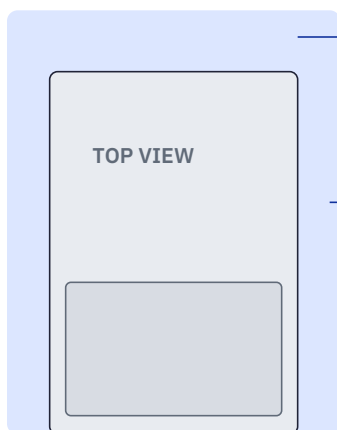

Front

2-3/8 in behind

1-5/8 in each side


Above: room to invert a bottle into the funnel.

Cylinder: its own space beside the appliance, about 5-1/4 in across and 18 in tall, plus the regulator.

Keep side air paths open.

# Lower. Then push back.

The faucet, its tubes and cable arrive joined together. Keep the assembly intact.

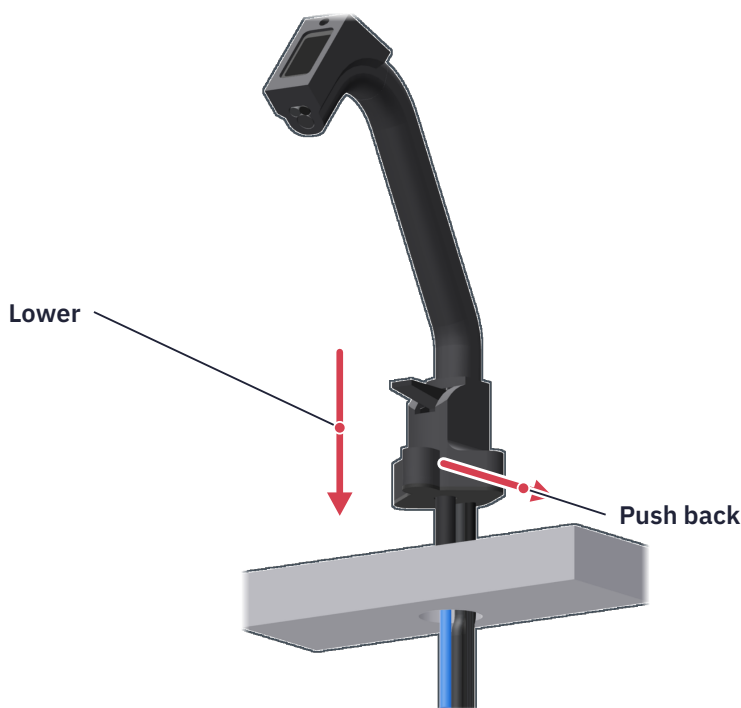

## 1 Feed the tails through

Pass all three attached tubes and the display cable through the prepared hole. Lower the faucet onto the counter.

**Push the faucet away from you** until the two black tubes beneath it meet the back edge of the hole. Hold that position for the plate.

# Slide the plate. Tighten the nut.


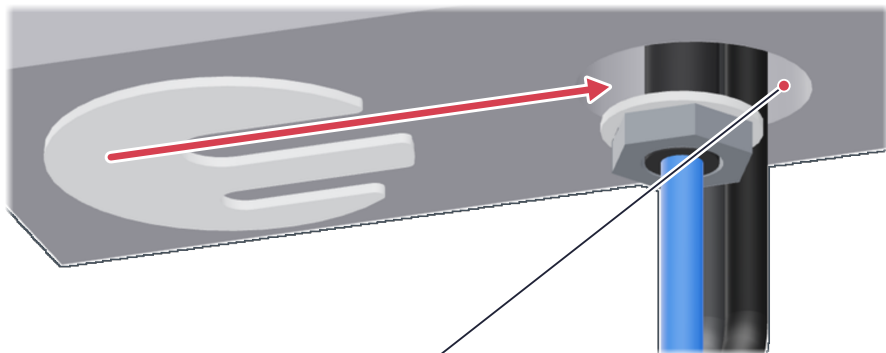


Plate above washer + nut

From below, hold the steel plate against the counter, **above the washer and nut already on the shank**. Slide the wide slot around the shank and the narrow slot around the black tubes.




## Hand-tighten the nut.

The plate stays flat against the underside of the counter and the faucet stays seated above.

# Which water connection?

Look at the cold supply under your sink. Use the tee that matches that connection.


## 1/4 in plastic tube



A small plastic tube in a push fitting, like a filter or refrigerator line. Use the **black tee**.

[Continue on page 8](#)

## Braided hose




A braided supply hose threaded onto a **3/8 in shutoff**. Use the **white tee**.

[Continue on pages 9-11](#)


### ONE TEE FOR YOUR KITCHEN

The long white filtered run arrives attached to the black tee. Page 11 shows how to move it to the white tee for the braided-hose path.


# Connect the plastic tube



**Close the cold-water shutoff.** Run the cold tap until it stops. Put a cup and towel beneath the fitting.

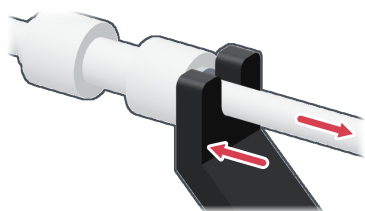

**Hold the release ring in** with the collet press. With your other hand, pull the original white tube out.



**Push the short jumper** on the supplied black tee into the fitting you just opened.




**Reconnect the original tube** to the tee's open end. Push both joints fully home; tug gently to check.

## NEXT: REAR CONNECTIONS / PAGE 12

Keep the water shutoff closed. The white run already includes its filter; its free end goes to the appliance.

# The braided-hose path

These three pages show the white tee connection. After it is in place, continue at Step 3 on page 12.



Black tee: plastic tube. White tee with lever: braided hose.

## 1 Find the cold-water shutoff

Trace the kitchen faucet's cold hose down to its valve. The supplied white tee fits a 3/8 in outlet.


## 2 Close it and relieve the pressure

Close the valve, then open the kitchen faucet on cold. Wait for the flow to stop. Set a cup and towel under the connection.


### CHECK BEFORE LOOSENING

If the water keeps flowing, or the fitting is a different size, stop and get installation help before opening the joint.

# Lift the hose clear

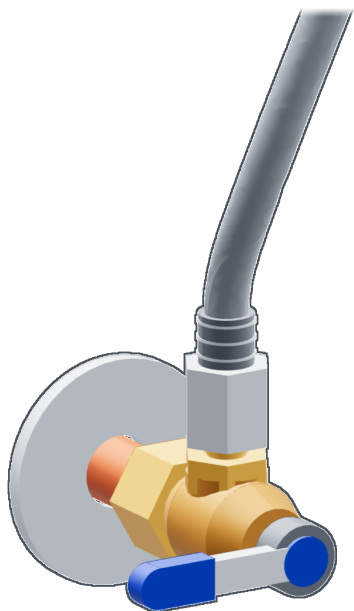

Valve closed

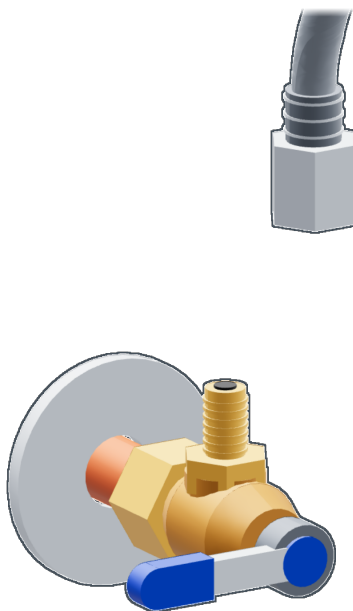


Hose nut lifted clear

## 3 Hold the shutoff steady

Use one wrench on the valve body while the other loosens the braided hose's nut. Keep the valve from twisting on its pipe.

Finish unscrewing the nut by hand, then lift the hose away. Catch the water left in the hose.

# Fit the white tee

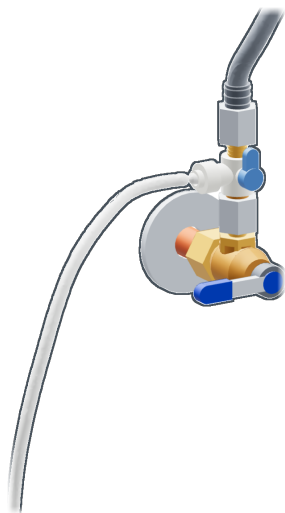

## 4 / Tee onto valve

Start the tee's lower nut by hand on the shutoff outlet.

## 5 / Hose onto tee

Reconnect the braided hose to the top. Hold the tee steady and nip both joints up with the wrench: snug, then a little more.

## 6 / Move the white filtered run

Use the collet press to release the long white run from the black tee's branch. Keep the filter and collar on the run. The black tee and its short jumper are not used on this path.

Push the white run fully into the white tee's side port, then tug gently. Leave the tee's small lever open so water can reach the appliance later.

**Keep the main shutoff closed. Go to page 12.**

# Match the rear connections

**Pull off the CO2 and TAP shipping caps.** They fit over the outside of the fittings. Leave the fittings mounted in the appliance.



Faucet cable clicks here

**CO2**

Red tube from the cylinder

**SODA**

Blue tube from the faucet

**TAP**

White run from the filter

**FLAVOR**

Two black tubes; either black port

# Push home. Then tug.

Every tube needs to reach the fitting's internal stop, then stay put when you pull gently.



Push each tube straight in until it bottoms, **a little over 1/2 in.** A fitting can grip a tube before it reaches the seal, so push to its internal stop. **Tug gently** to check it holds.

## Lay the filter flat



Keep its factory connections together. Route the white tube and faucet tails in loose curves, clear of things that slide in and out.

Keep the extra length coiled. A tight bend can pinch a tube closed.

# Attach the regulator

Stand the filled 5 lb cylinder upright beside the appliance. Keep its valve closed.




The regulator's large nut meets the cylinder outlet.

## 1 Washer in the big nut

Place the regulator's supplied washer inside the large nut. Start the nut squarely on the cylinder outlet by hand.

**Nip it up with the adjustable wrench.** Keep the cylinder upright with its valve easy to reach.

# Connect the red tether

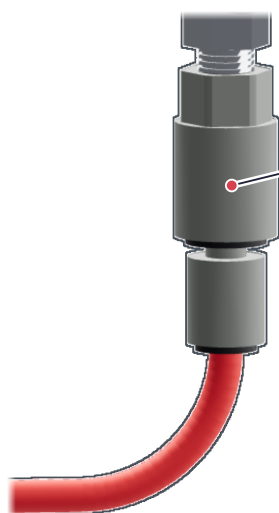

Gray connector

Screw the gray connector onto the regulator's bottom outlet **by hand until it stops.**

Its rubber washer makes the seal. Keep both gray fittings assembled.

## 2 Check the other end


The red tube belongs in the appliance's red CO2 port. Push it fully home and tug gently.

### KEEP THE CYLINDER CLOSED

Finish all connections before opening water or gas. The next three pages take you through water, gas and power in that order.

# First, open the water

## 1 / WATER

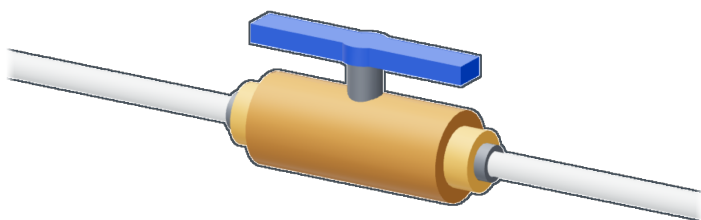

Plastic-tube shutoff shown open, handle in line with the tube.

### 1 Open the shutoff slowly

On the braided-hose path, also check that the white tee's small side-port lever is open.

### 2 Watch for a full minute


Inspect the tee, both filter ends and the appliance TAP connection. Keep the power cord unplugged while you check.

#### IF YOU SEE WATER

Close the water shutoff. Resolve the leak before opening the cylinder or connecting power. Page 23 has the first checks.

# Then, open the gas

## 2 / GAS

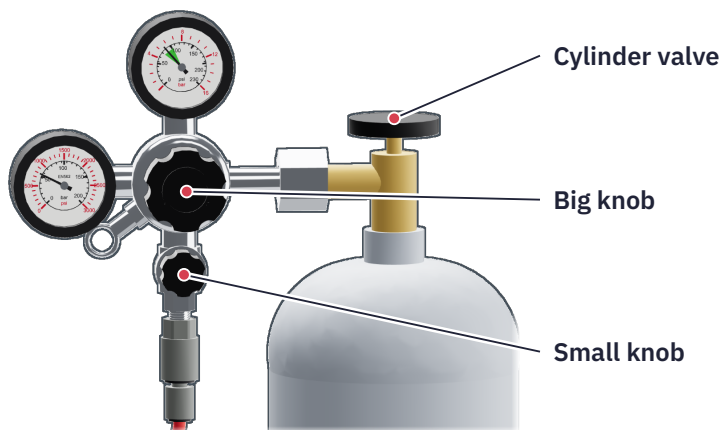

Open the **cylinder valve**, then the regulator's **small knob**. Turn the **big knob** until the **upper gauge needle sits in the green band**.




Listen at the large nut, gray connector and red CO2 port. A continuing hiss means a leak. Soapy water at a joint can reveal it as growing bubbles.

### CHECK BEFORE POWER

If gas continues to escape, close the cylinder valve and stop. Get help with a joint that will not seal.

# Finally, connect power

## 3 / POWER

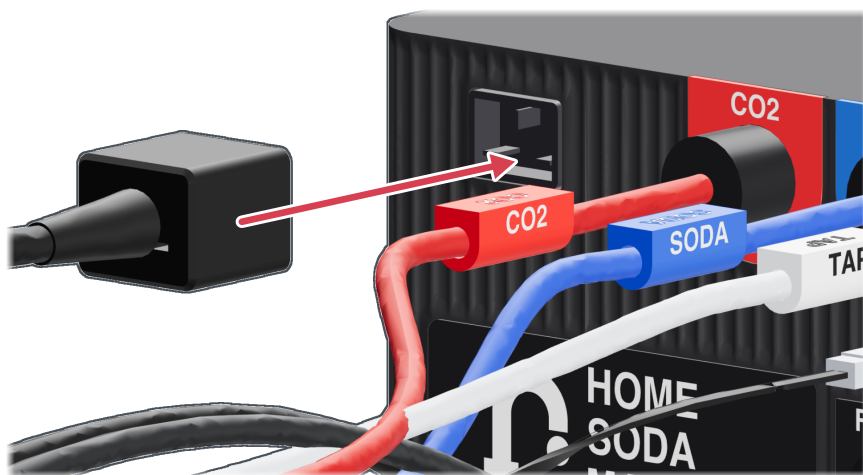

### 1 Seat the appliance end

Push the cord straight into the top-left socket on the back of the appliance.

### 2 Plug into grounded 120 V


The appliance chimes and its enclosure display starts. Follow the display if it reports an issue.

#### POWER REQUIREMENTS

120 V, 60 Hz; 5 A, 600 W. Use the supplied grounded cord. The socket's 250 V marking describes the connector; the appliance uses 120 V.

# Choose the flavor to fill

Use the enclosure display under the counter. The left rail chooses which reservoir you are filling.

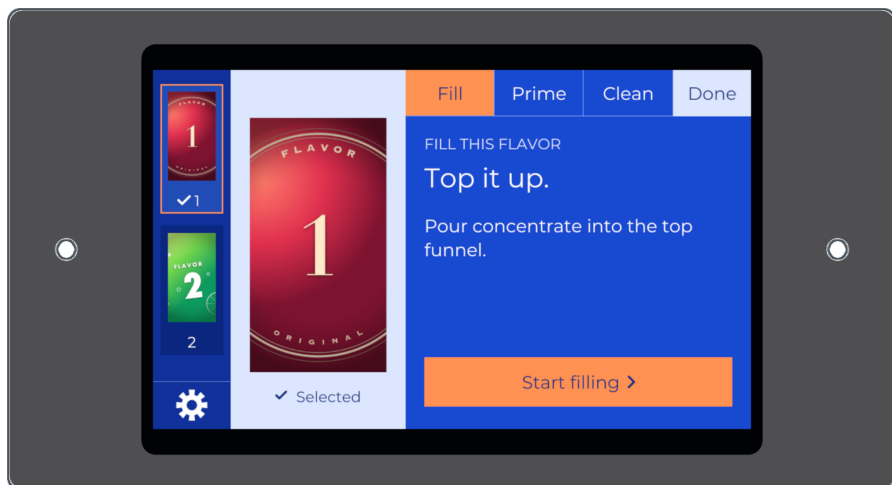

Flavor 1 is selected. Fill and Start filling are separate controls.

## 1 Choose a flavor

Tap its image on the left. The large portrait shows your selected flavor.

## 2 Open Fill

Tap Fill across the top. Leave the Start filling button alone until the concentrate is in place on the next page.

# Bottle first. Then start.



## 3 / Add concentrate

Invert one whole **14.8 fl oz (440 mL)** bottle into the top funnel.

## 4 / Start filling

Tap **Start filling**. Let the appliance draw the concentrate into the selected reservoir.

---

## 5 Wait for Filled


When the display says Filled, that bottle is in the reservoir. Remove the empty bottle.

## 6 Repeat for the second flavor

Select the other image on the left, open Fill, put its bottle in the funnel, then tap Start filling.

# Chill. Choose. Pour.

**FIRST CHILL: ABOUT 1 HOUR**

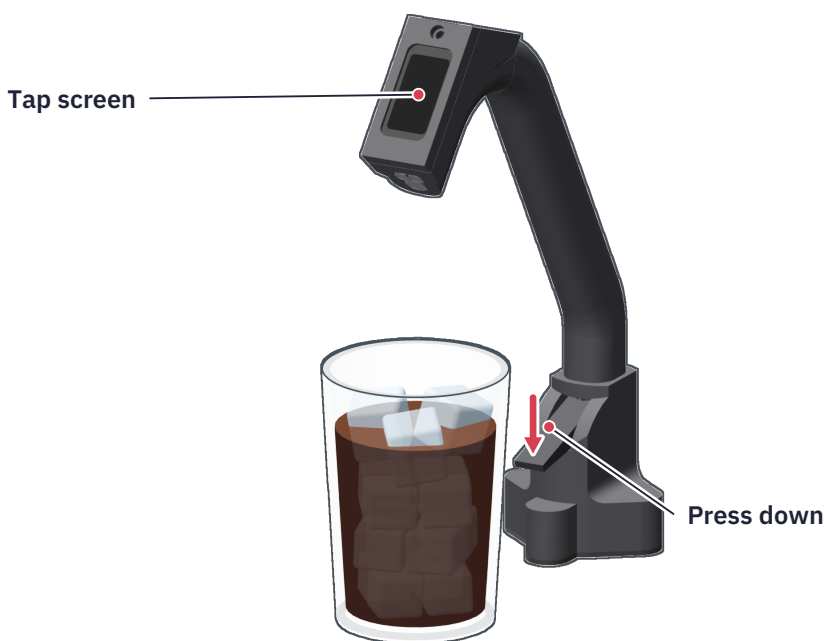

## 1 Choose at the faucet

Tap the faucet display to select a flavor. If the screen is dim, the first tap wakes it.


## 2 Fill your glass with ice

Put it below the faucet and press the lever down to pour over the ice. Release the lever to stop.

# Keep it ready

## Top up a flavor

Use the same Fill sequence on pages 19-20. If the display says **Full**, the reservoir is full and some concentrate remains in the funnel. Stop adding concentrate.



## Rinse the funnel

Rinse it weekly and after a flavor change. The silicone funnel is dishwasher safe.

When empty, release the funnel's drain connection with the collet press. Lift the funnel with its short drain stub and clamp attached. Refit it and push the connection fully home.

## Filter and cylinder

Replace the water filter once a year. Close the water before opening its connections. Arrange a cylinder refill when needed and close the cylinder before disconnecting its regulator.

Keep the collet press. The bagged cold kit is for shortening and insulating the faucet run after installation is complete.

# If something is not right

## Water at a push fitting

Close the water shutoff. For the household tee, run the kitchen cold tap until it stops before releasing a tube. Hold the ring in with the collet press, reseal the tube fully and tug gently. Get help relieving pressure at an appliance connection before opening it.

---

## A continuing gas hiss

Close the cylinder valve. Check the large nut, gray connector and red CO2 connection. A joint that still leaks needs help before you continue.

---

## Flow, power or temperature

**No pour:** check the water shutoff and the white tee's lever, if used.

**No power:** check the cord and outlet. Read any message on the display. **Warm pour:** allow about an hour for the first chill.

### STOP WITH AN UNRESOLVED LEAK

Close the water and cylinder valves. Keep power disconnected until the leak is resolved. Have the appliance serial number and a photo of the connection ready.



HOME SODA MACHINE

# On tap.

---

Keep this guide  
with your install kit.

For installation help, have the serial number from the nameplate on the back of the appliance ready.

**Sealed cooling circuit**

R-600a (isobutane), flammable refrigerant.

Under 1.5 oz (40 g). Do not open, puncture or heat.

**[homesodamachine.com](https://homesodamachine.com)**

Guides: [homesodamachine.com/drawings](https://homesodamachine.com/drawings)