


254000 (TJC8) CONNECTOR

间距: 2.54mm
(Pitch) (.100")

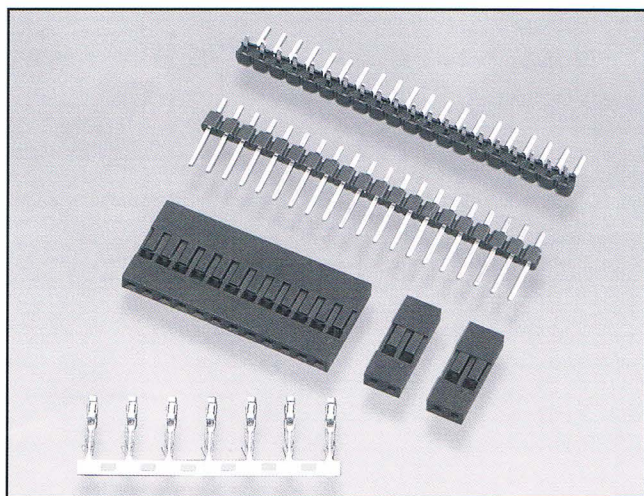


■ 技术参数 (SPECIFICATIONS)

- 线数 (poles): 1 ~ 20
- 适用线规 (Applicable wires): AWG28# ~ 22#
- 适应基板厚度 (Applicable PC board thickness): 1.6mm
- 温度范围 (Temperature range): -25℃ ~ 85℃
- 额定电压 (Voltage rating): 250V.AC/DC
- 额定电流 (Current rating): 3A
- 接触电阻 (Contact resistance): $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 耐压 (Withstand voltage): 800V.AC/1min
- 材料 (Material):
 - 孔座 (Housing): 尼龙 (PA66) UL94V-2/0
 - 针座 (Wafer): 尼龙 (PA66) UL94V-2/0
 - 端子 (Terminal): 磷青铜 (C5191)

端子 (Terminal)

型号 Part no.	适用线规 Applicable wires		电线外径 O.D of wire ins
	mm ²	AWG#	
254000-PT	0.06~0.33	28~22	1.0~1.7


254000-PT(TJC8)

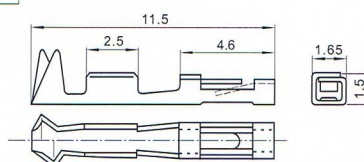


孔座 (Housing)/针座 (Pin header)

线数 Poles	型号 Part no.	尺寸 Dimensions(mm)	
		A	B
1	254000-01Y/A/WA	0.00	2.80
2	254000-02Y/A/WA	2.54	5.34
3	254000-03Y/A/WA	5.08	7.88
4	254000-04Y/A/WA	7.62	10.42
5	254000-05Y/A/WA	10.16	12.96
6	254000-06Y/A/WA	12.70	15.50
7	254000-07Y/A/WA	15.24	18.04
8	254000-08Y/A/WA	17.78	20.58
9	254000-09Y/A/WA	20.32	23.12
10	254000-10Y/A/WA	22.86	25.66
11	254000-11Y/A/WA	25.40	28.20
12	254000-12Y/A/WA	27.94	30.74
13	254000-13Y/A/WA	30.48	33.28
14	254000-14Y/A/WA	33.02	35.82
15	254000-15Y/A/WA	35.56	38.36
...
20	25001-20Y/A/WA	48.26	51.06


(Y)

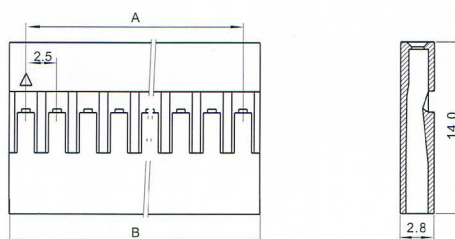

(A)

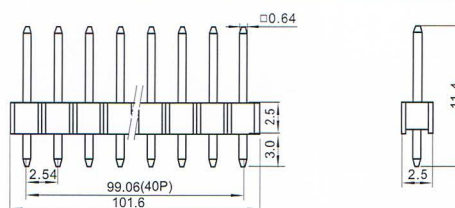

(WA)

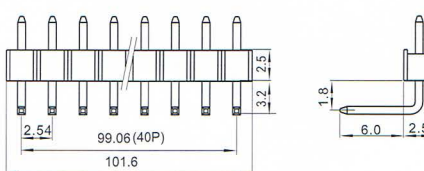

■ 安装尺寸 (Mounting Measurement)

