


254016 (SA) CONNECTOR

间距: 2.54mm
(Pitch) (.100")

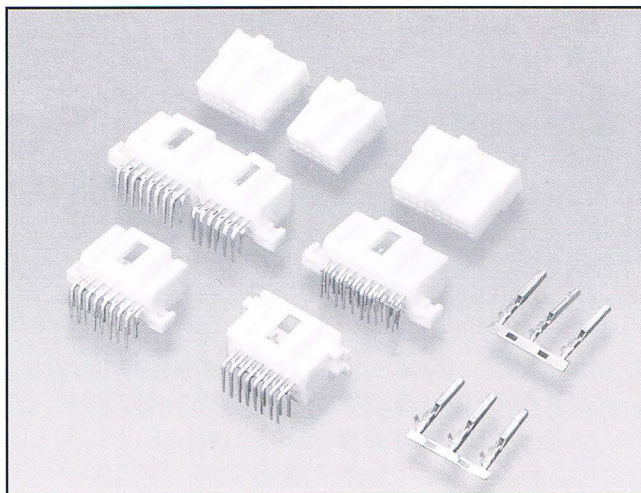


■ 技术参数 (SPECIFICATIONS)

- 线数 (poles): 12、16、20、28
- 适用线规 (Applicable wires): AWG30#~20#
- 适应基板厚度 (Applicable PC board thickness): 1.6mm
- 温度范围 (Temperature range): -25℃~85℃
- 额定电压 (Voltage rating): 250V.AC/DC
- 额定电流 (Current rating): 3A
- 接触电阻 (Contact resistance): $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 耐压 (Withstand voltage): 1000V.AC/1min
- 材料 (Material):
 - 孔座 (Housing): 尼龙 (PA66) UL94V-2/0
 - 针座 (Wafer): 尼龙 (PA66) UL94V-2/0
 - 端子 (Terminal): 磷青铜 (C5191)

端子 (Terminal)

型号 Part no.	适用线规 Applicable wires		电线外径 O.D of wire ins mm
	mm ²	AWG#	
254016-01PT	0.05~0.14	30~26	0.8~1.2
254016-21PT	0.18~0.50	24~20	1.1~1.6

254016-01PT(SA)
254016-21PT(SA)



线数 Poles	■ 孔座 (Housing)	■ 针座 (Wafer)	■ 安装尺寸 (Mounting Measurement)
16	254016-16Y(SA) 	254016-16WAF(HZT) 	
		254016-16WA 	
20	254016-20Y(SA) 	254016-20WAF(HZT) 	
28	254016-12Y(SA) 	254016-28WAF(HZT) 	
	254016-16Y(SA) 		