


15000 (ZH) CONNECTOR

间距: 1.50mm
(Pitch) (.059")

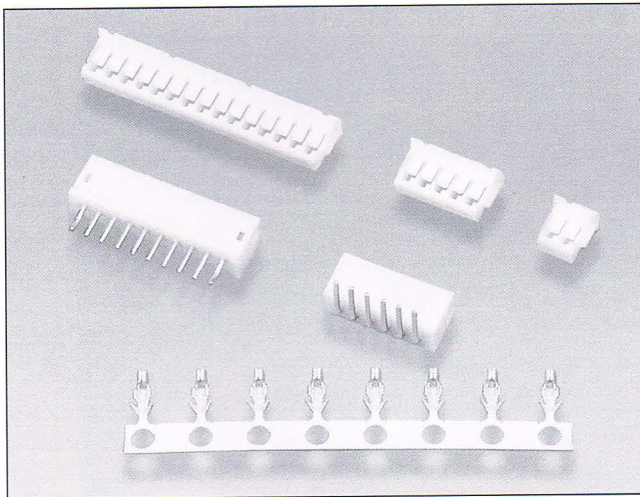


■ 技术参数 (SPECIFICATIONS)

- 线数 (poles): 2~13
- 适用线规 (Applicable wires): AWG32#~26#
- 适应基板厚度 (Applicable PC board thickness): 1.6mm
- 温度范围 (Temperature range): -25℃~85℃
- 额定电压 (Voltage rating): 50V.AC/DC
- 额定电流 (Current rating): 1A
- 接触电阻 (Contact resistance): $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 500M\Omega$
- 耐压 (Withstand voltage): 500V.AC/1min
- 材料 (Material):
 - 孔座 (Housing): 尼龙 (PA66) UL94V-2/0
 - 针座 (Wafer): 尼龙 (PA66) UL94V-2/0
 - 端子 (Terminal): 磷青铜 (C5191)




端子 (Terminal)

型号 Part no.	适用线规 Applicable wires		电线外径 O.D of wire ins
	mm ²	AWG#	mm
15000-PT	0.032~0.14	32~26	0.6~1.2

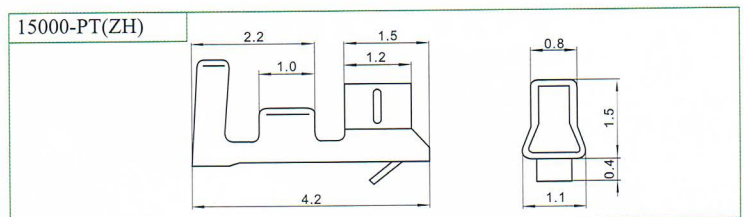

孔座 (Housing)

线数 Poles	型号 Part no.	尺寸 Dimensions(mm)		
		A	B	C
2	15000-02Y	1.50	3.40	4.50
3	15000-03Y	3.00	4.90	6.00
4	15000-04Y	4.50	6.40	7.50
5	15000-05Y	6.00	7.90	9.00
6	15000-06Y	7.50	9.40	10.50
7	15000-07Y	9.00	10.90	12.00
8	15000-08Y	10.50	12.10	13.50
9	15000-09Y	12.00	13.90	15.00
10	15000-10Y	13.50	15.40	16.50
11	15000-11Y	15.00	16.90	18.00
12	15000-12Y	16.50	18.40	19.50
13	15000-13Y	18.00	19.90	21.00

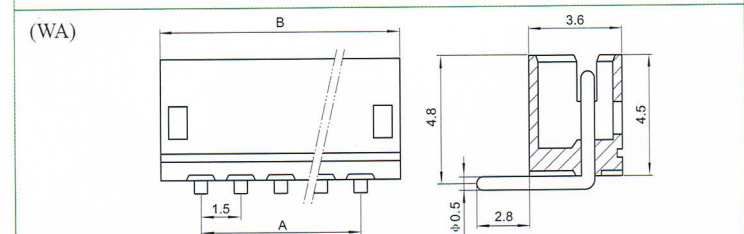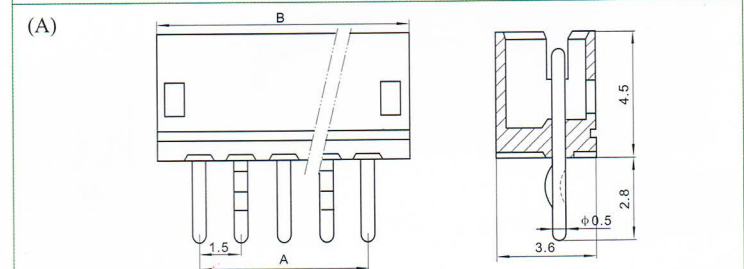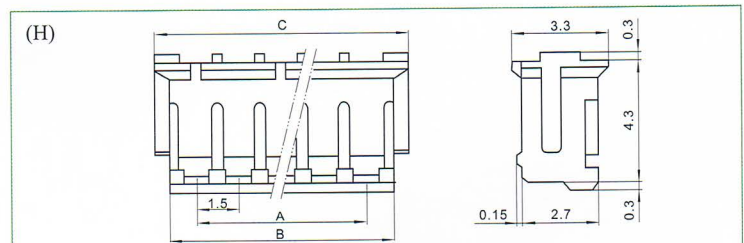

针座 (Wafer)

线数 Poles	型号 Part no. A180°/WA90°	尺寸 Dimensions(mm)	
		A	B
2	15000-02A/02WA	1.50	4.50
3	15000-03A/03WA	3.00	6.00
4	15000-04A/04WA	4.50	7.50
5	15000-05A/05WA	6.00	9.00
6	15000-06A/06WA	7.50	10.50
7	15000-07A/07WA	9.00	12.00
8	15000-08A/08WA	10.50	13.50
9	15000-09A/09WA	12.00	15.00
10	15000-10A/10WA	13.50	16.50
11	15000-11A/11WA	15.00	18.00
12	15000-12A/12WA	16.50	19.50
13	15000-13A/13WA	18.00	21.00

■ 安装尺寸 (Mounting Measurement)

