

■ 技术参数 (SPECIFICATIONS)

- 线数 (Poles): 2~12
- 适用线规 (Applicable wires): AWG22#~18#
- 适应基板厚度 (Applicable PC board thickness): 1.6mm
- 温度范围 (Temperature range): -25℃~85℃
- 额定电压 (Voltage rating): 250V.AC/DC
- 额定电流 (Current rating): 7A
- 接触电阻 (Contact resistance): $\leq 0.015\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 耐压 (Withstand voltage): 1500V.AC/1min
- 材料 (Material):
 - 孔座 (Housing): 尼龙 (PA66) UL94V-2/0
 - 针座 (Wafer): 尼龙 (PA66) UL94V-2/0
 - 端子 (Terminal): 磷青铜 (C5191)

端子 (Terminal)

型号 Part no.	适用线规 Applicable wires		电线外径 O.D of wire ins
	mm ²	AWG#	
39600-PT	0.33~0.83	22~18	1.7~3.0


孔座 (Housing)

线数 Poles	型号 Part no.	尺寸 Dimensions(mm)	
		A	B
2	39600-02Y	3.96	8.06
3	39600-03Y	7.92	11.92
4	39600-04Y	11.88	15.88
5	39600-05Y	15.84	19.84
6	39600-06Y	19.80	23.80
7	39600-07Y	23.76	27.76
8	39600-08Y	27.72	31.72
9	39600-09Y	31.68	35.68
10	39600-10Y	35.64	39.64
11	39600-11Y	39.60	43.60
12	39600-12Y	43.56	47.56


针座 (Wafer)

线数 Poles	型号 Part no. A180°/WA90°	尺寸 Dimensions(mm)	
		A	B
2	39600-02A/02WA	3.96	7.92
3	39600-03A/03WA	7.92	11.88
4	39600-04A/04WA	11.88	15.84
5	39600-05A/05WA	15.84	19.80
6	39600-06A/06WA	19.80	23.76
7	39600-07A/07WA	23.76	27.72
8	39600-08A/08WA	27.72	31.68
9	39600-09A/09WA	31.68	35.64
10	39600-10A/10WA	35.64	39.60
11	39600-11A/11WA	39.60	43.56
12	39600-12A/12WA	43.56	47.52


39600-PT(VH)




(H)

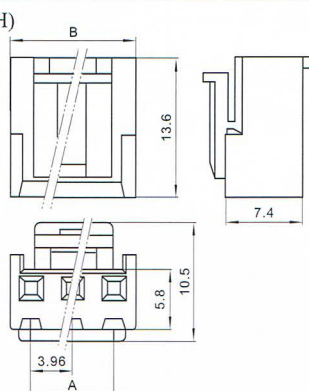


(A)



(WAP)



(WAG)



■ 安装尺寸 (Mounting Measurement)

