


39602 (2139) CONNECTOR

间距: 3.96mm
(Pitch) (.156")

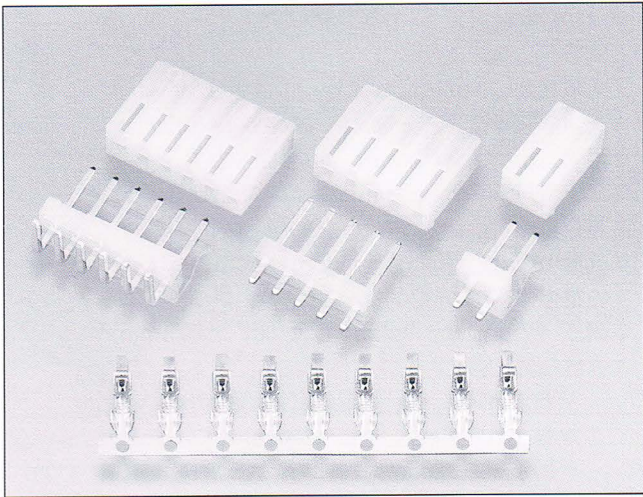

■ 技术参数 (SPECIFICATIONS)

- 线数 (Poles): 2~16
- 适用线规 (Applicable wires): AWG22#~18#
- 适应基板厚度 (Applicable PC board thickness): 1.6mm
- 温度范围 (Temperature range): -25℃~85℃
- 额定电压 (Voltage rating): 250V.AC/DC
- 额定电流 (Current rating): 5A
- 接触电阻 (Contact resistance): ≤ 0.015W
- 绝缘电阻 (Insulation resistance): ≥ 1000MW
- 耐压 (Withstand voltage): 1500V.AC/1min
- 材料 (Material):
 - 孔座 (Housing): 尼龙 (PA66) UL94V-2/0
 - 针座 (Wafer): 尼龙 (PA66) UL94V-2/0
 - 端子 (Terminal): 磷青铜 (C5191), 黄铜(C2700)

端子 (Terminal)




型号 Part no.	适用线规 Applicable wires		电线外径 O.D of wire ins
	mm ²	AWG#	mm
39602-PTA	0.20~0.75	22~18	1.7~3.0
39602-PTB			

孔座 (Housing)

线数 Poles	型号 Part no.	尺寸 Dimensions(mm)	
		A	B
2	39602-02Y	3.96	8.52
3	39602-03Y	7.92	12.48
4	39602-04Y	11.88	16.44
5	39602-05Y	15.84	20.40
6	39602-06Y	19.80	24.36
7	39602-07Y	23.76	28.32
8	39602-08Y	27.72	32.28
9	39602-09Y	31.68	36.24
10	39602-10Y	35.64	40.20
11	39602-11Y	39.60	44.16
12	39602-12Y	43.56	48.12
...
16	39602-16Y	59.40	63.96

针座 (Wafer)

线数 Poles	型号 Part no. A、NA180°/WA90°	尺寸 Dimensions(mm)		
		A	B	C
2	39602-02A/WA/NA	3.96	7.92	7.77
3	39602-03A/WA/NA	7.92	11.88	11.73
4	39602-04A/WA/NA	11.88	15.84	15.69
5	39602-05A/WA/NA	15.84	19.80	19.65
6	39602-06A/WA/NA	19.80	23.76	23.61
7	39602-07A/WA/NA	23.76	27.72	27.57
8	39602-08A/WA/NA	27.72	31.68	31.53
9	39602-09A/WA/NA	31.68	35.64	35.49
10	39602-10A/WA/NA	35.64	39.60	39.45
11	39602-11A/WA/NA	39.60	43.56	43.41
12	39602-12A/WA/NA	43.56	47.52	47.37
13	39602-13A/WA/NA	47.52	51.48	----
14	39602-14A/WA/NA	51.48	55.44	----
15	39602-15A/WA/NA	55.44	59.40	----
16	39602-16A/WA/NA	59.40	63.36	----

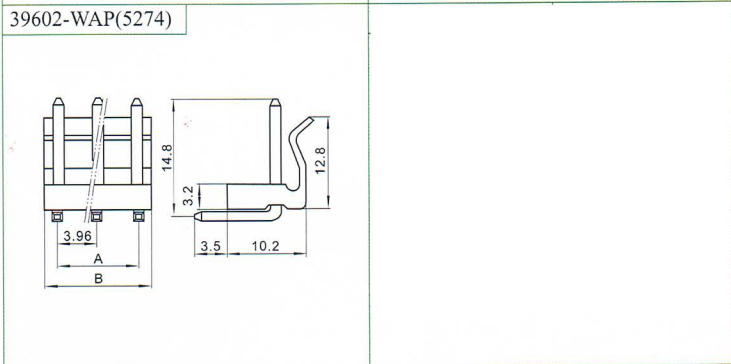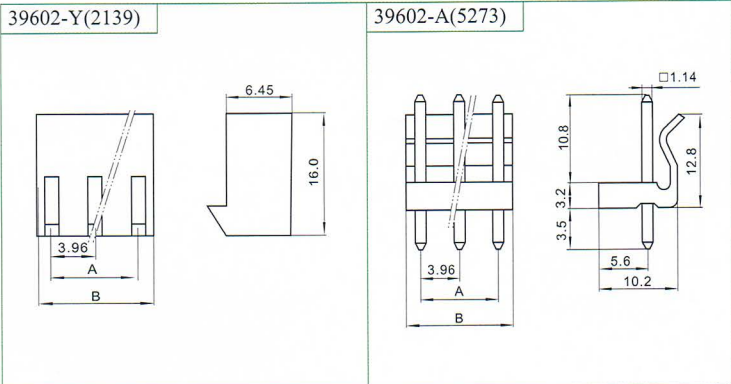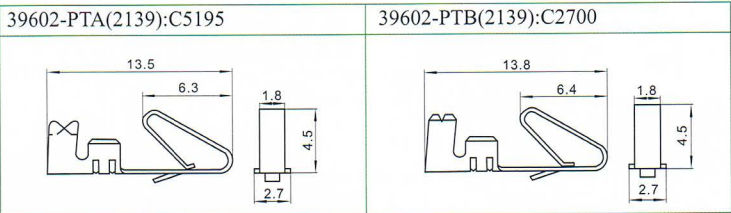

■ 安装尺寸 (Mounting Measurement)

