


25008 (250) CONNECTOR

间距: 2.50mm
(Pitch) (.098")

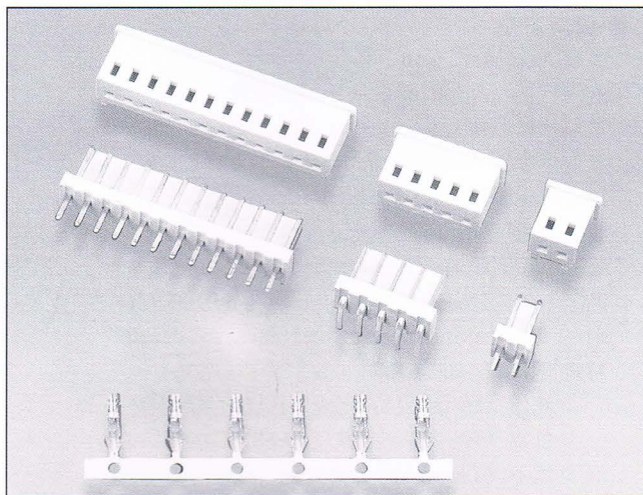


■ 技术参数 (SPECIFICATIONS)

- 线数 (poles): 2~16
- 适用线规 (Applicable wires): AWG28#~22#
- 适应基板厚度 (Applicable PC board thickness): 1.6mm
- 温度范围 (Temperature range): -25℃~85℃
- 额定电压 (Voltage rating): 250V.AC/DC
- 额定电流 (Current rating): 3A
- 接触电阻 (Contact resistance): $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 耐压 (Withstand voltage): 1000V.AC/1min
- 材料 (Material):
 - 孔座 (Housing): 尼龙 (PA66) UL94V-2/0
 - 针座 (Wafer): 尼龙 (PA66) UL94V-2/0
 - 端子 (Terminal): 磷青铜 (C5191)

端子 (Terminal)

型号 Part no.	适用线规 Applicable wires		电线外径 O.D of wire ins mm
	mm ²	AWG#	
25008-PT	0.06~0.30	28~22	1.0~1.9


25008-PT(250)




孔座 (Housing)

线数 Poles	型号 Part no.	尺寸 Dimensions(mm)	
		A	B
2	25008-02Y	2.50	6.00
3	25008-03Y	5.00	8.50
4	25008-04Y	7.50	11.00
5	25008-05Y	10.00	13.50
6	25008-06Y	12.50	16.00
7	25008-07Y	15.00	18.50
8	25008-08Y	17.50	21.00
9	25008-09Y	20.00	23.50
10	25008-10Y	22.50	26.00
11	25008-11Y	25.00	28.50
12	25008-12Y	27.50	31.00
13	25008-13Y	30.00	33.50
14	25008-14Y	32.50	36.00
15	25008-15Y	35.00	38.50
16	25008-16Y	37.50	41.00

(H)

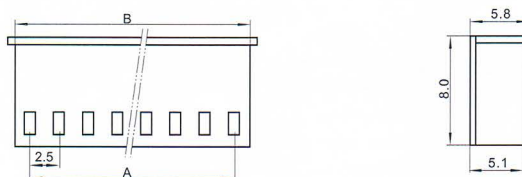


(A)

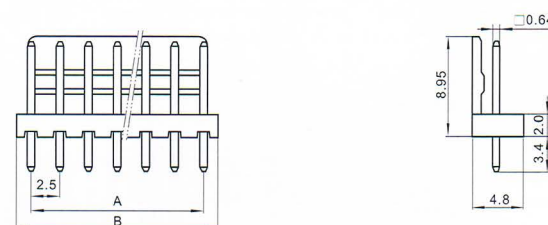

针座 (Wafer)

线数 Poles	型号 Part no. A180°/WA90°	尺寸 Dimensions(mm)	
		A	B
2	25008-02A/02WA	2.50	5.00
3	25008-03A/03WA	5.00	7.50
4	25008-04A/04WA	7.50	10.00
5	25008-05A/05WA	10.00	12.50
6	25008-06A/06WA	12.50	15.00
7	25008-07A/07WA	15.00	17.50
8	25008-08A/08WA	17.50	20.00
9	25008-09A/09WA	20.00	22.50
10	25008-10A/10WA	22.50	25.00
11	25008-11A/11WA	25.00	27.50
12	25008-12A/12WA	27.50	30.00
13	25008-13A/13WA	30.00	32.50
14	25008-14A/14WA	32.50	35.00
15	25008-15A/15WA	35.00	37.50
16	25008-16A/16WA	37.50	40.00

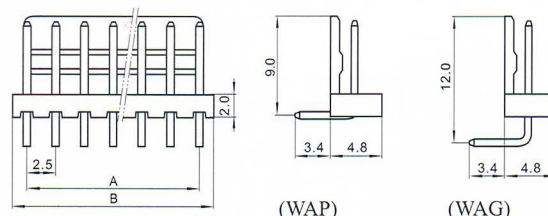

■ 安装尺寸 (Mounting Measurement)

