


05000 (0.5A/B) CONNECTOR

间距: 0.50mm
(Pitch) (.020")

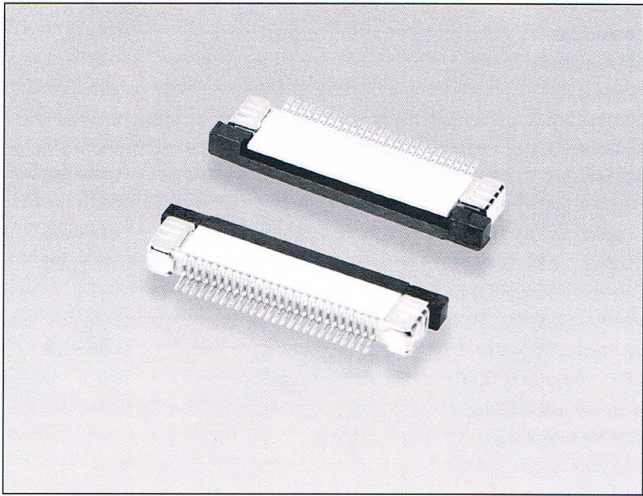


■ 技术参数 (SPECIFICATIONS)


- 线数 (poles): 4~40
- 适用线规 (Applicable wires): FFC/FPC
- 温度范围 (Temperature range): -25℃ ~ 85℃
- 额定电压 (Voltage rating): 50V.AC/DC
- 额定电流 (Current rating): 0.5A
- 接触电阻 (Contact resistance): $\leq 0.03\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 500M\Omega$
- 耐压 (Withstand voltage): 500V.AC/1min
- 材料 (Material):
 - 壳体 (Housing): 尼龙 (PA46) UL94V-0
 - 端子 (Terminal): 磷青铜 (C5210)
- B: 贴片 (SMD), S: 上接点 (Top of contact)
- X: 下接点 (Bottom of contact)

线数 Poles	型号 Part no.	尺寸 Dimensions(mm)		
		A	B	C
4	05000-04A-BS/X	1.50	2.60	8.40
5	05000-05A-BS/X	2.00	3.10	8.90
6	05000-06A-BS/X	2.50	3.60	9.40
7	05000-07A-BS/X	3.00	4.10	9.90
8	05000-08A-BS/X	3.50	4.60	10.40
9	05000-09A-BS/X	4.00	5.10	10.90
10	05000-10A-BS/X	4.50	5.60	11.40
11	05000-11A-BS/X	5.00	6.10	11.90
12	05000-12A-BS/X	5.50	6.60	12.40
13	05000-13A-BS/X	6.00	7.10	12.90
14	05000-14A-BS/X	6.50	7.60	13.40
15	05000-15A-BS/X	7.00	8.10	13.90
16	05000-16A-BS/X	7.50	8.60	14.40
...
38	05000-38A-BS/X	18.50	19.60	25.40
39	05000-39A-BS/X	19.00	20.10	25.90
40	05000-40A-BS/X	19.50	20.60	26.40


(A)

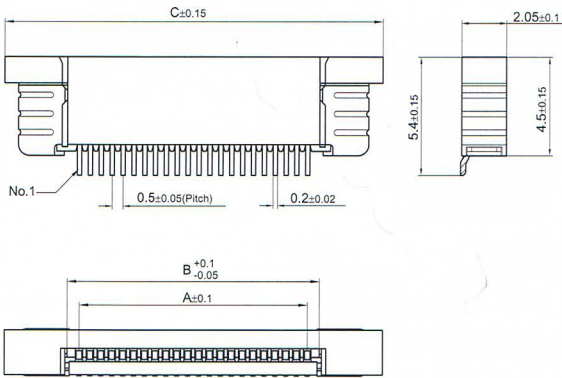


■ 安装尺寸 (Mounting Measurement)

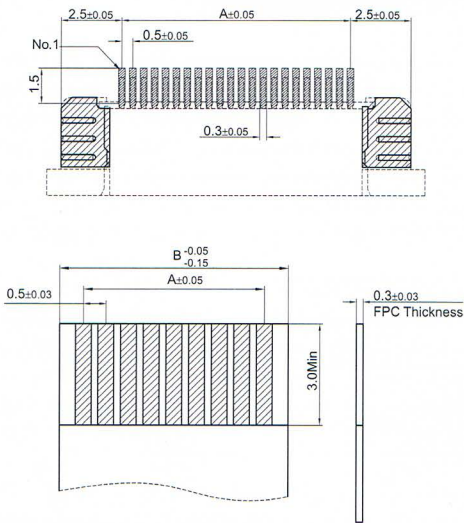

适用FPC寸法 (Applicable FPC)



05000-nA-BS



05000-nA-BX