


# 10000 (1.0A) CONNECTOR

间距: 1.00mm  
(Pitch) (.039")

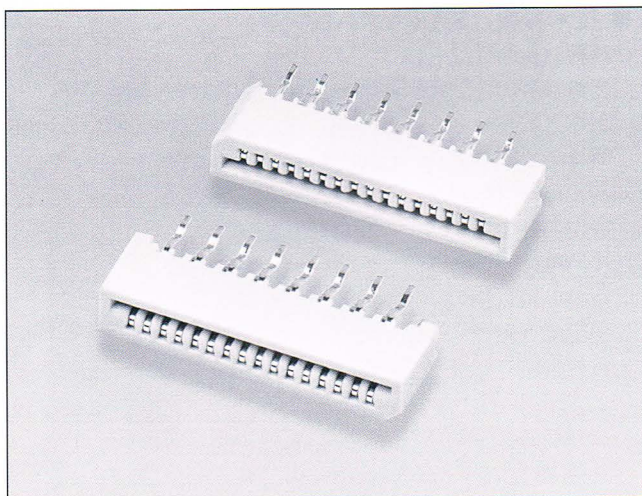


## ■ 技术参数 (SPECIFICATIONS)

- 线数 (poles): 4~40
- 适用线规 (Applicable wires): FFC/FPC
- 温度范围 (Temperature range):  $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- 额定电压 (Voltage rating): 50V.AC/DC
- 额定电流 (Current rating): 0.5A
- 接触电阻 (Contact resistance):  $\leq 0.03\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 800\text{M}\Omega$
- 耐压 (Withstand voltage): 500V.AC/1min
- 材料 (Material):
  - 壳体 (Housing): 尼龙 (PA46) UL94V-0
  - 端子 (Terminal): 磷青铜 (C5210)
- S: 上接点 (Top of contact)
- X: 下接点 (Bottom of contact)
- F: 反针 (Reversed pointer)
- 正针无 (None for positive pointer)


线数 Poles	型号 (F) Part no.	尺寸 Dimensions(mm)		
		A	B	C
4	10000-04A(WA)-S/F	3.00	5.10	7.60
5	10000-05A(WA)-S/F	4.00	6.10	8.60
6	10000-06A(WA)-S/F	5.00	7.10	9.60
7	10000-07A(WA)-S/F	6.00	8.10	10.60
8	10000-08A(WA)-S/F	7.00	9.10	11.60
9	10000-09A(WA)-S/F	8.00	10.10	12.60
10	10000-10A(WA)-S/F	9.00	11.10	13.60
11	10000-11A(WA)-S/F	10.00	12.10	14.60
12	10000-12A(WA)-S/F	11.00	13.10	15.60
13	10000-13A(WA)-S/F	12.00	14.10	16.60
14	10000-14A(WA)-S/F	13.00	15.10	17.60
15	10000-15A(WA)-S/F	14.00	16.10	18.60
16	10000-16A(WA)-S/F	15.00	17.10	19.60
...	...	...	...	...
38	10000-38A(WA)-S/F	37.00	39.10	41.60
39	10000-39A(WA)-S/F	38.00	40.10	42.60
40	10000-40A(WA)-S/F	39.00	41.10	43.60

## ■ 安装尺寸 (Mounting Measurement)

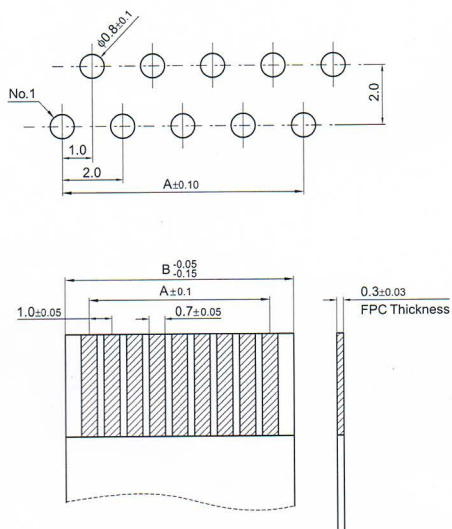

适用FPC寸法 (Applicable FPC)

(A)

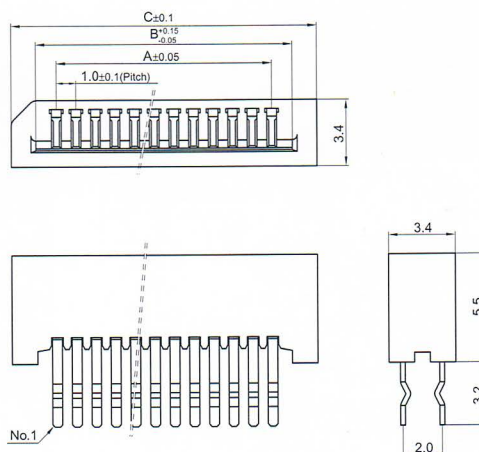

(WA)

