


# 39606(35156) CONNECTOR

间距: 3.96mm  
(Pitch) (.156")

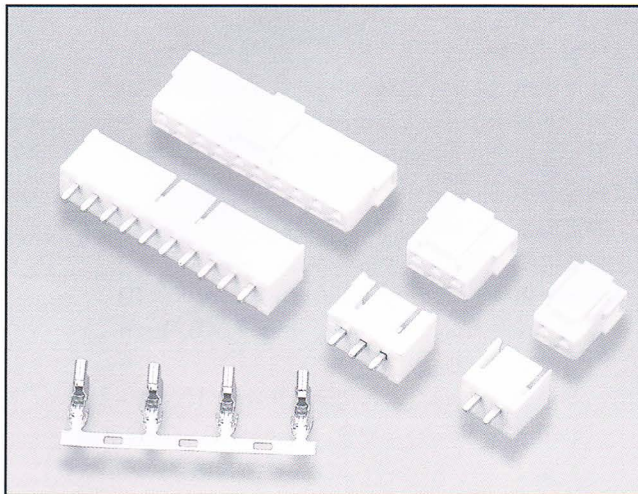

## ■ 技术参数 (SPECIFICATIONS)

- 线数 (Poles): 2~16
- 适用线规 (Applicable wires): AWG22#~18#
- 适应基板厚度 (Applicable PC board thickness): 1.6mm
- 温度范围 (Temperature range): -25℃~85℃
- 额定电压 (Voltage rating): 250V.AC/DC
- 额定电流 (Current rating): 7A
- 接触电阻 (Contact resistance):  $\leq 0.015\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 耐压 (Withstand voltage): 1500V.AC/1min
- 材料 (Material):
  - 孔座 (Housing): 尼龙 (PA66) UL94V-2/0
  - 针座 (Wafer): 尼龙 (PA66) UL94V-2/0
  - 端子 (Terminal): 磷青铜 (C5191)

## 端子 (Terminal)

型号 Part no.	适用线规 Applicable wires		电线外径 O.D of wire ins mm
	mm <sup>2</sup>	AWG#	
39606-PT	0.20~0.75	22~18	1.5~3.0


## 孔座 (Housing)

线数 Poles	型号 Part no.	尺寸 Dimensions(mm)		
		A	B	C
2	39606-02Y	3.96	8.84	10.54
3	39606-03Y	7.92	12.80	14.50
4	39606-04Y	11.88	16.76	18.46
5	39606-05Y	15.84	20.72	22.42
6	39606-06Y	19.80	24.68	26.38
7	39606-07Y	23.76	28.64	30.34
8	39606-08Y	27.72	32.60	34.30
9	39606-09Y	31.68	36.56	38.26
10	39606-10Y	35.64	40.52	42.22
11	39606-11Y	39.60	44.48	46.18
12	39606-12Y	43.56	48.44	50.14
...	...	...	...	...
16	39606-16Y	59.40	64.28	73.90


## 针座 (Wafer)

线数 Poles	型号 Part no.	尺寸 Dimensions(mm)	
		A	B
2	39606-02A	3.96	10.68
3	39606-03A	7.92	14.64
4	39606-04A	11.88	18.60
5	39606-05A	15.84	22.56
6	39606-06A	19.80	26.52
7	39606-07A	23.76	30.48
8	39606-08A	27.72	34.44
9	39606-09A	31.68	38.40
10	39606-10A	35.64	42.36
11	39606-11A	39.60	46.32
12	39606-12A	43.56	50.28
...	...	...	...
16	39606-16A	59.40	66.12


39606-PT(52017)

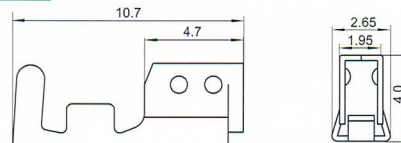

39606-Y(35156)

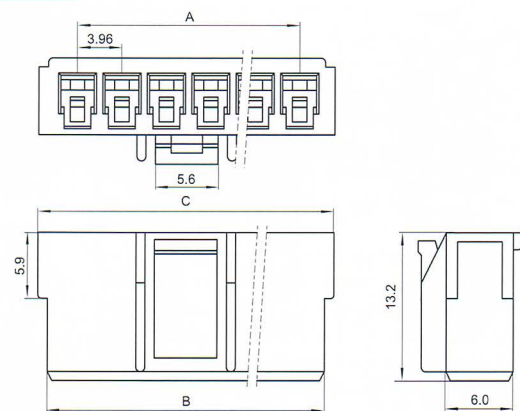

39606-A(35313)

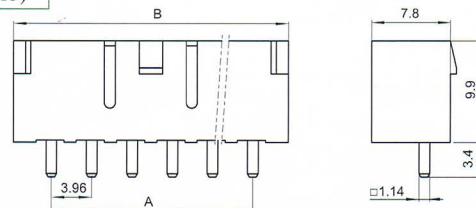

## ■ 安装尺寸 (Mounting Measurement)

