


20130723/J5

• HALL A LEGACY BCM SYSTEM

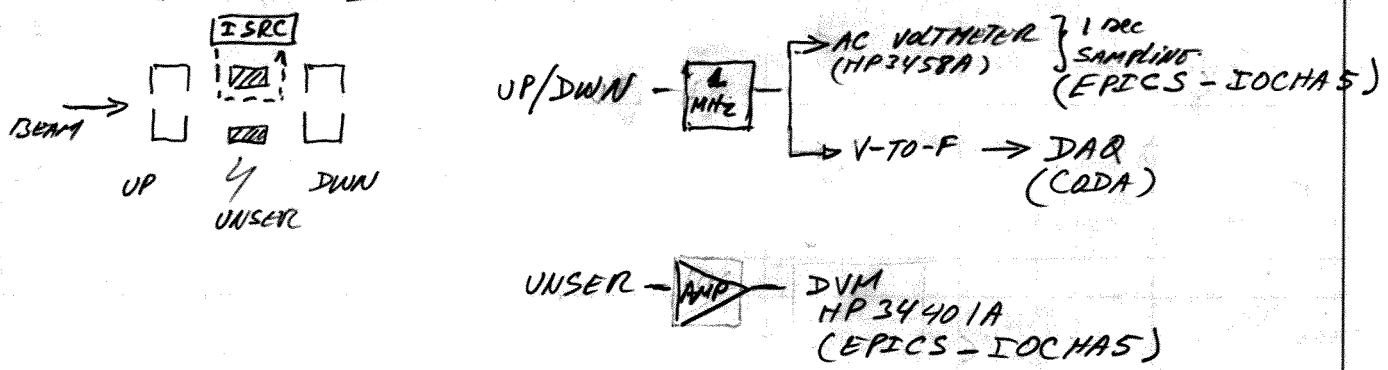

- IOCHAS LOOS
- INT. FARADAY CUP
 - INT. POWERMETER
 - HALL A UNSER
 - HALL A UP-CAVITY RAW AC VOLT.
 - HALL A DWN-CAVITY RAW AC VOLT.
 - HALL A POWERMETER*


WHILE PERFORMING BCM CALIBRATION CYCLE.

NOTE: THERE IS NO EPICS CODE THAT OPERATES THE UNSER CURRENT SOURCE (ISRC) OR ANY STEP IN THE BCM CALIBRATION PROCEDURE THAT CALLS FOR ISRC.

20130723/50

2

PROPOSAL FOR BCM SYSTEM UPGRADE

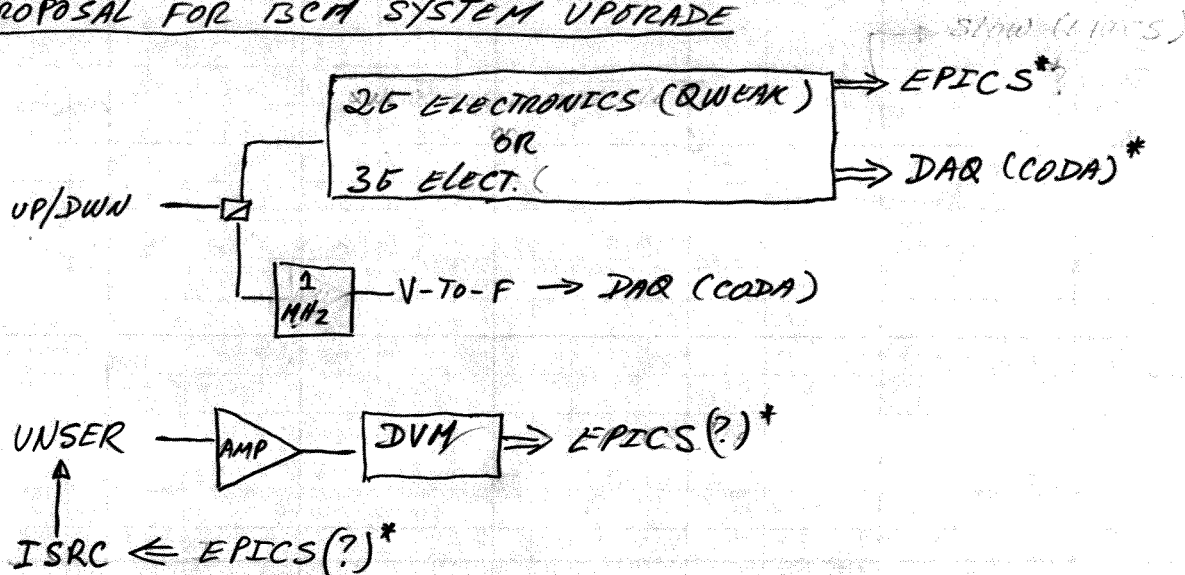

(a) 1 MHz BRANCH AS LEGACY $\Rightarrow$ CAN TAKE DATA WITH CODA

(b) MISSING (INDICATED BY * ABOVE),

- (1.) IOC⁽¹⁾/SYSTEM^(S) PERFORMING BCM CALIBRATION
(E.G. READ UNSER,
CONTROL ISRC
READ 25/35 UP/DWN-CAVITY ELECTRONICS
READ INT. FARADAY CUP (?)
READ INT. POWERMETER

(2.) SCHEME TO PUT 25/35 UP/DWN-CAVITY ELECTRONICS OUTPUT INTO DAQ (CODA)

(c) HALL C MAY HAVE SOFTWARE TO CALIBRATE UNSER WITH ISRC.

(b.1) IS ABSOLUTELY ESSENTIAL TO MEASURE ANY CROSS-SECTION

(b.2) IS INTELLECTUALLY FUN BUT NOT ESSENTIAL SINCE ONE HAS (a) ABOVE.

SASHA/ROMAN/VADYM/DOUB ARE SPEARHEADING THIS PROJECT $\Rightarrow$ PLEASE DISCUSS WITH THEM PLANS/IDEAS BEFORE FORGING AHEAD

- JOHN MUSSON WILL SETUP MEETING TO DISCUSS METHODS TO READ 25/35 BCM-CAVITY ELECTRONICS INTO DAQ SYSTEM