

Set Current (A)	Transducer Readback Current (A)	Measured GL (G)	Old Map GL (G)	% Diff
300	298.92	-52321.4	-50634.0	3.3%
250	249.05	-44466.6	-42648.3	4.3%
200	199.43	-35810.7	-34312.7	4.4%
150	149.70	-26986.4	-25791.0	4.6%
100	100.02	-18137.9	-17210.7	5.4%
50	50.25	-9237.0	-8623.3	7.1%
10	10.47	-2119.8	-1904.0	11.3%
0				
-10	-10.49	1648.3	1574.7	4.7%
-50	-50.33	8755.3	8622.0	1.5%
-100	-100.11	17643.0	17204.0	2.6%
-150	-149.68	26480.6	25804.0	2.6%
-200	-198.01	35298.7	34311.7	2.9%
-250	-249.36	43945.1	42677.0	3.0%
-300	-298.92	52279.4	50680.0	3.2%


Transducer (V)	I (A)	BL (G-cm)	B (G)	Leff (cm)
5.98	298.99	253514.7	-5668.4	44.7

Notes:


Gradient values deterined from fit to 7 BL stretched wire measurements along
Effective length of the quadrupole was checked using stepped hall probe measurements

Chamber Dimension (in)	
OD	4
ID	3.87

Hall Probe on Pole	Hall (*-1)
5604	-5604
4760	-4760
3828	-3828
2877	-2877
1929	-1929
979	-979
221	-221
24	-24
-175	175
-930	930
-1873	1873
-2811	2811
-3750	3750
-4669	4669
-5560	5560

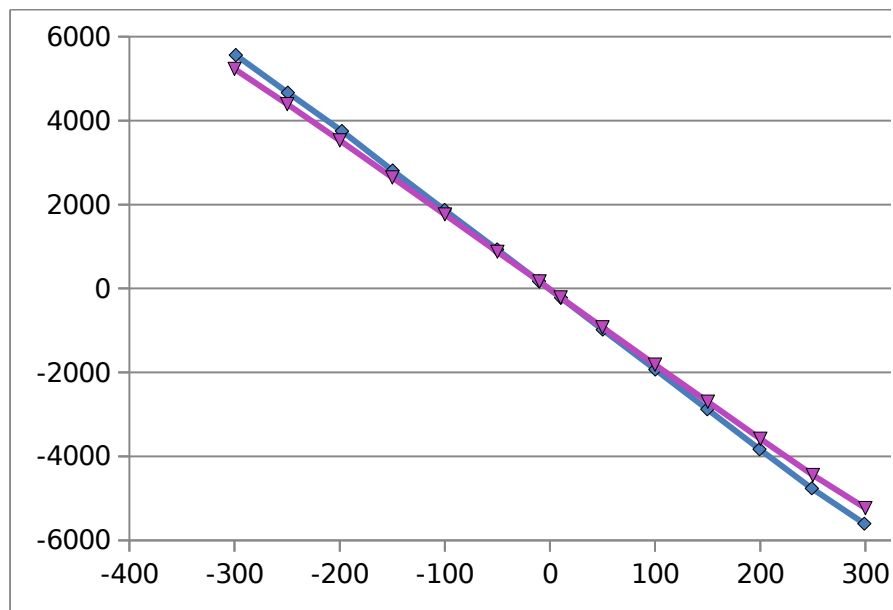

g the vertical midplane of the quadrupole at each current
asurements along the upper beam right pole.

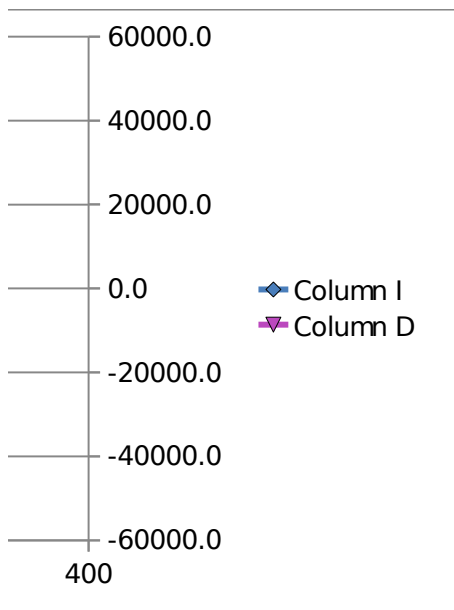

	BR TOP Pole	
	dz	B
-10	-0.25	-23
-9.5	-0.5	-26
-9	-0.5	-30
-8.5	-0.5	-35
-8	-0.5	-41
-7.5	-0.5	-47
-7	-0.5	-55
-6.5	-0.5	-64
-6	-0.5	-75
-5.5	-0.5	-88
-5	-0.5	-103
-4.5	-0.5	-122
-4	-0.5	-144
-3.5	-0.5	-170
-3	-0.5	-202
-2.5	-0.5	-240
-2	-0.5	-286
-1.5	-0.5	-340
-1	-0.5	-406
-0.5	-0.5	-487
0	-0.5	-584
0.5	-0.5	-701
1	-0.5	-843
1.5	-0.5	-1018
2	-0.5	-1233
2.5	-0.5	-1495
3	-0.5	-1853
3.5	-0.5	-2314
4	-0.5	-2955
4.5	-0.5	-3893
5	-0.5	-5232
5.5	-0.5	-6646
6	-0.5	-6561
6.5	-0.5	-6195
7	-0.5	-5974
7.5	-0.5	-5855
8	-0.5	-5785
8.5	-0.5	-5744
9	-0.5	-5718
9.5	-0.5	-5702
10	-0.5	-5693
10.5	-0.5	-5686
11	-0.5	-5682
11.5	-0.5	-5679
12	-0.5	-5677
12.5	-0.5	-5675
13	-0.5	-5673
13.5	-0.5	-5672
14	-0.5	-5671

14.5	-0.5	-5671
15	-5.32	-5668
25.13	-5.07	-5668
25.13	-5.17	-5668
35.46	-5.42	-5668
35.96	-0.5	-5672
36.46	-0.5	-5676
36.96	-0.5	-5679
37.46	-0.5	-5683
37.96	-0.5	-5687
38.46	-0.5	-5691
38.96	-0.5	-5694
39.46	-0.5	-5701
39.96	-0.5	-5708
40.46	-0.5	-5718
40.96	-0.5	-5732
41.46	-0.5	-5754
41.96	-0.5	-5789
42.46	-0.5	-5842
42.96	-0.5	-5927
43.46	-0.5	-6058
43.96	-0.5	-6224
44.46	-0.5	-6175
44.96	-0.5	-5384
45.46	-0.5	-4302
45.96	-0.5	-3395
46.46	-0.5	-2714
46.96	-0.5	-2204
47.46	-0.5	-1810
47.96	-0.5	-1498
48.46	-0.5	-1245
48.96	-0.5	-1038
49.46	-0.5	-867
49.96	-0.5	-724
50.46	-0.5	-605
50.96	-0.5	-507
51.46	-0.5	-441
51.96	-0.5	-362
52.46	-0.5	-300
52.96	-0.5	-251
53.46	-0.5	-211
53.96	-0.5	-177
54.46	-0.5	-150
54.96	-0.5	-127
55.46	-0.5	-107
55.96	-0.5	-91
56.46	-0.5	-77
56.96	-0.5	-66
57.46	-0.5	-56
57.96	-0.5	-48
58.46	-0.5	-42

58.96	-0.5	-36
59.46	-0.5	-31
59.96	-0.5	-27
60.46	-0.25	-24

Chamber Dimension (in)				
OD	4			
ID	3.87			
Transducer	I (A)	BL	B	Leff
5.98	298.99	253514.7	-5668	44.72

Readings Taken at R=4.6cm (approximate)

