

1




















2

3

4

A

A

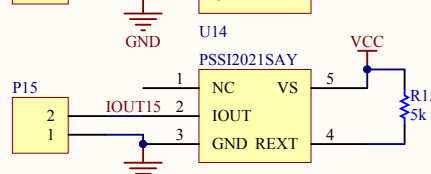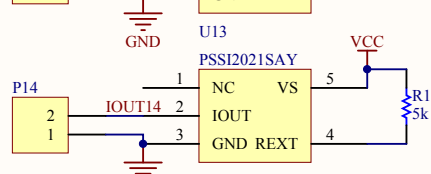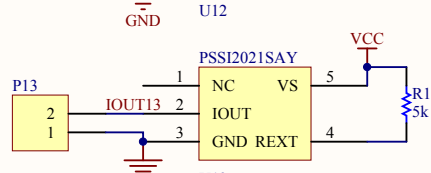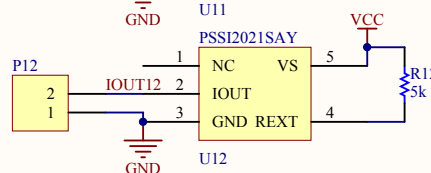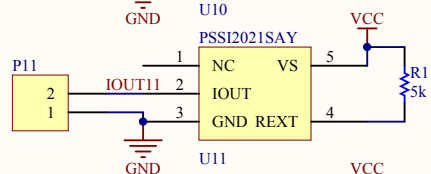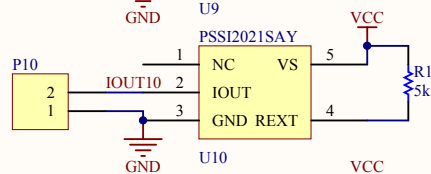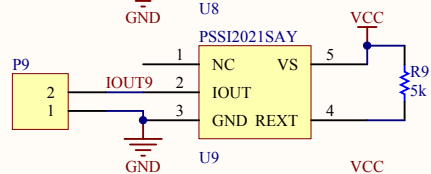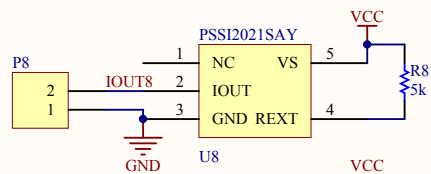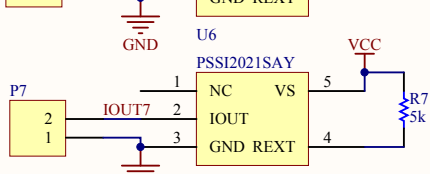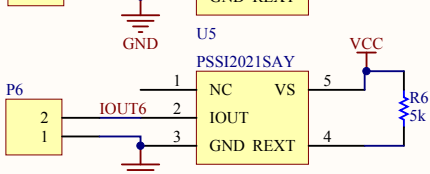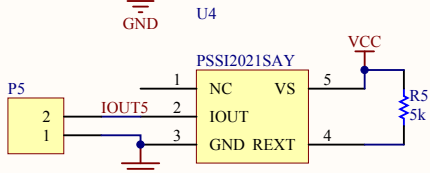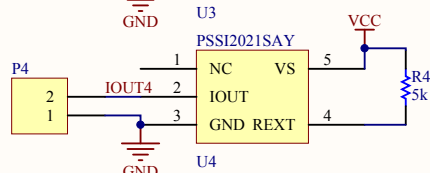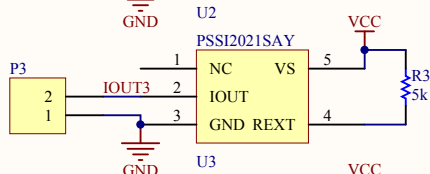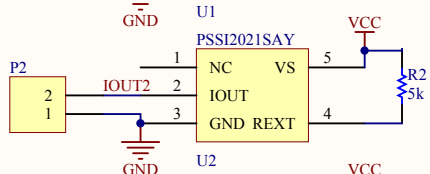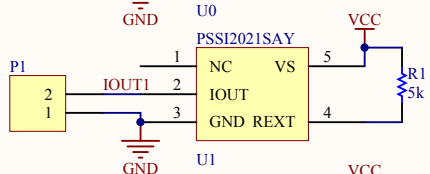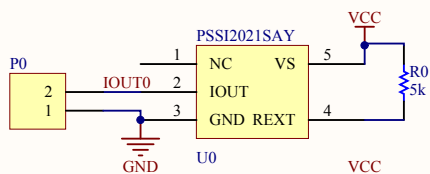

B

B

C

C

D

D

Title		
bigMama constant current breakout		
Size	Number	Revision
A4		0.2
Date:	04/04/2013	Sheet of
File:	C:\Documents and Settings\...bigMama.Sch	Drawn By: dermitza

1

2

3

4

Comment	Description	Designator	Footprint	LibRef	Quantity
10uF	Chip Capacitor	C0	0805_CAP	CAP_SMD	1
BLUE		D0	0603_LED	LED_SMD	1
S0	Header, 2-Pin	P0, P1, P2, P3, P4, P5, P6, P7, P8, P9, P10, P11, P12, P13, P14, P15	HDR1X2	Header 2	16
Header 9X2	Header, 9-Pin, Dual row	P16	HDR2X9	Header 9X2	1
Header 2	Header, 2-Pin	P17	HDR1X2	Header 2	1
5k		R0, R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15	0603_RES	RES_SMD	16
220		R16	0603_RES	RES_SMD	1
PSSI2021SAY		U0, U1, U2, U3, U4, U5, U	SOT65P210X110-5N	PSSI2021SAY	16