


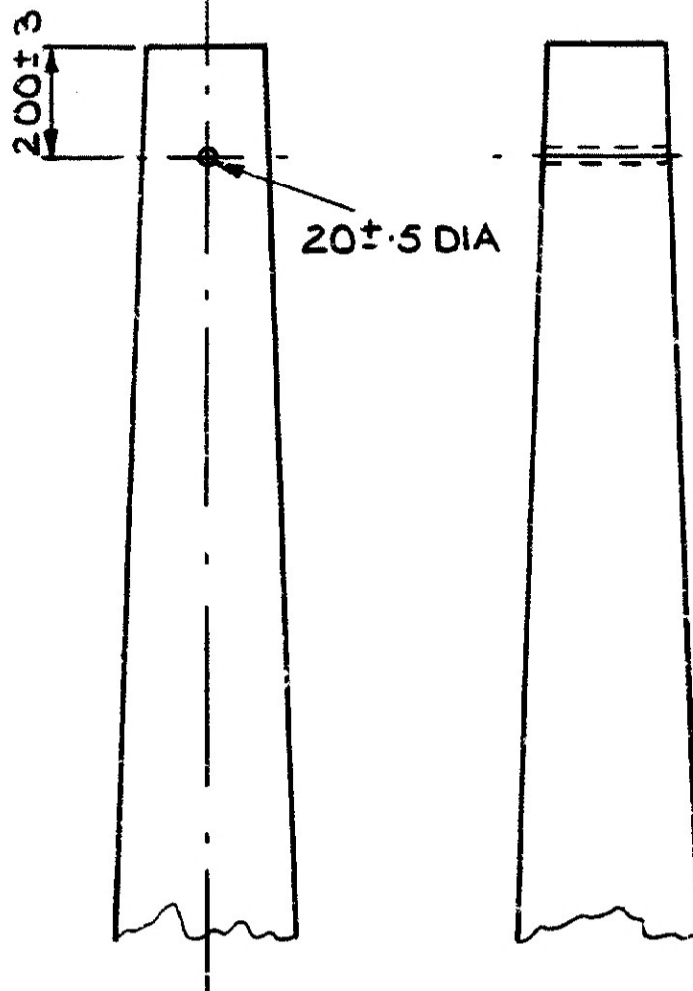

NOTES:-

1. TOP TO BE CUT FLAT AT RIGHT ANGLES TO LONGITUDINAL AXIS OF POLE.
2. BOLT HOLE TO BE DRILLED THROUGH LONGITUDINAL AXIS AND AT RIGHT ANGLES TO IT.

© British Telecommunications plc 1975 DIMS IN mm
DO NOT SCALE

COPYRIGHT & DUTY CODE CHANGED

RBL EMP. PES 9/12/88

G

REFERENCES

SPEC D1000

SEE SUPERSEDED ISSUE FOR PREVIOUS AMENDMENT

AMENDMENT

ISSUE

A 4

DRN A.C.S.
CKD H.T.

MATERIAL

FINISH

A 4

CERTIFICATION
F. RIEDPOLES
(EXCEPT EXTRA LIGHT)
POSITION OF BOLT HOLE

DATE 1-4-85

E-IN-C
4654BRITISH TELECOMMUNICATIONS
UKC/NSET 3.2.2

CN 206