




PILOT INSULATORS ARE TO BE POST TYPES SECURED BY 1 x M20 STUD.
CENTRAL PILOT INSULATOR CAN BE FITTED IN ANY OF TWO INVERTED OR UPRIGHT POSITIONS.
ATTACHMENT POINTS FOR INCOMING LINE AND DOWNLEADS ARE AS SHOWN ON THE PLAN VIEW.
ADJACENT WOOD POLE SUPPORT TO HAVE 2.5m CONDUCTOR SPACING.
TOWER TO CEGB DRAWING BK/25603.

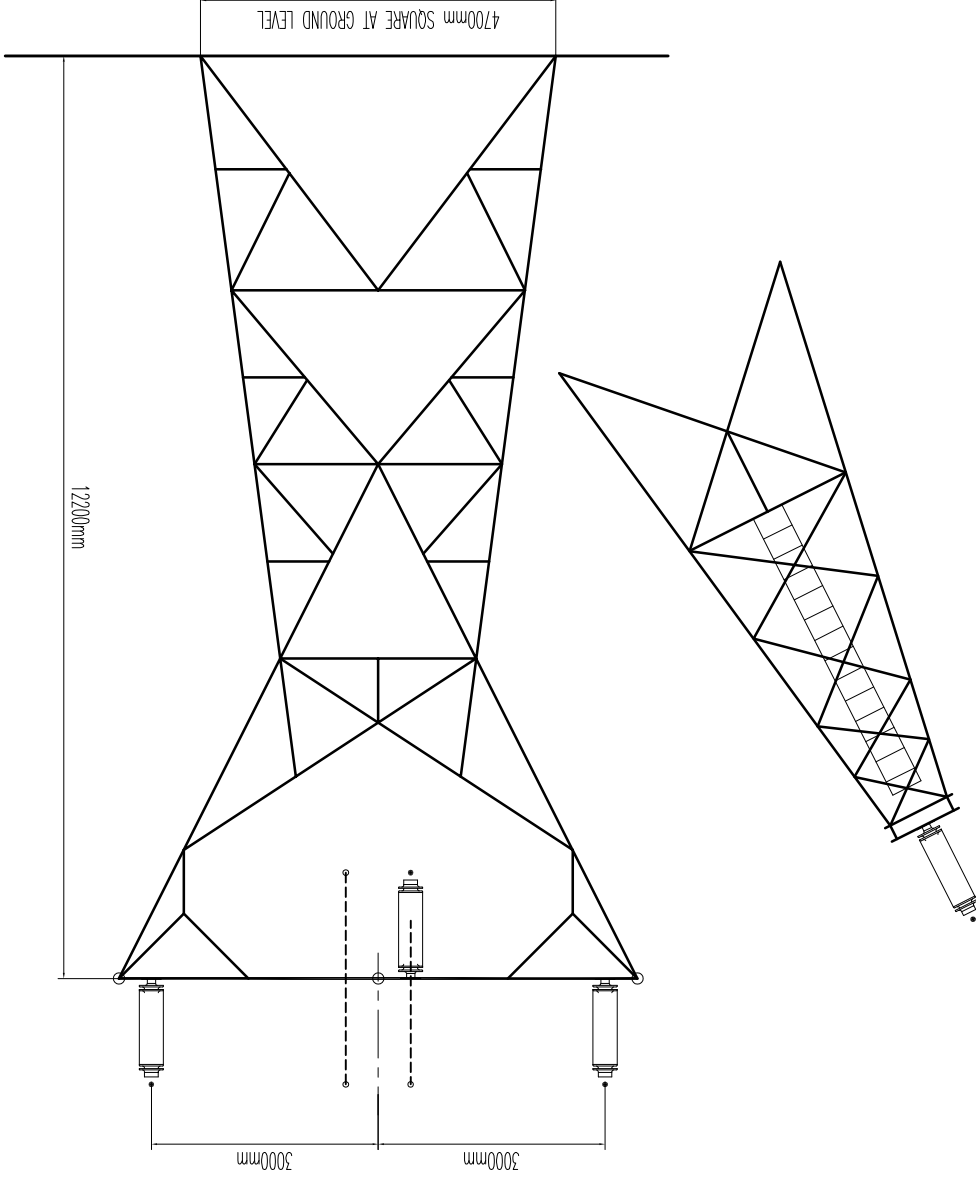