


MINIMUM 50mm WIDE FLAT FACE  
ON EACH SIDE OF THE POLE



100 FLAT FACE

POLE SIZE TO BE IMPRESSED ON BUTT

10.5m MINIMUM

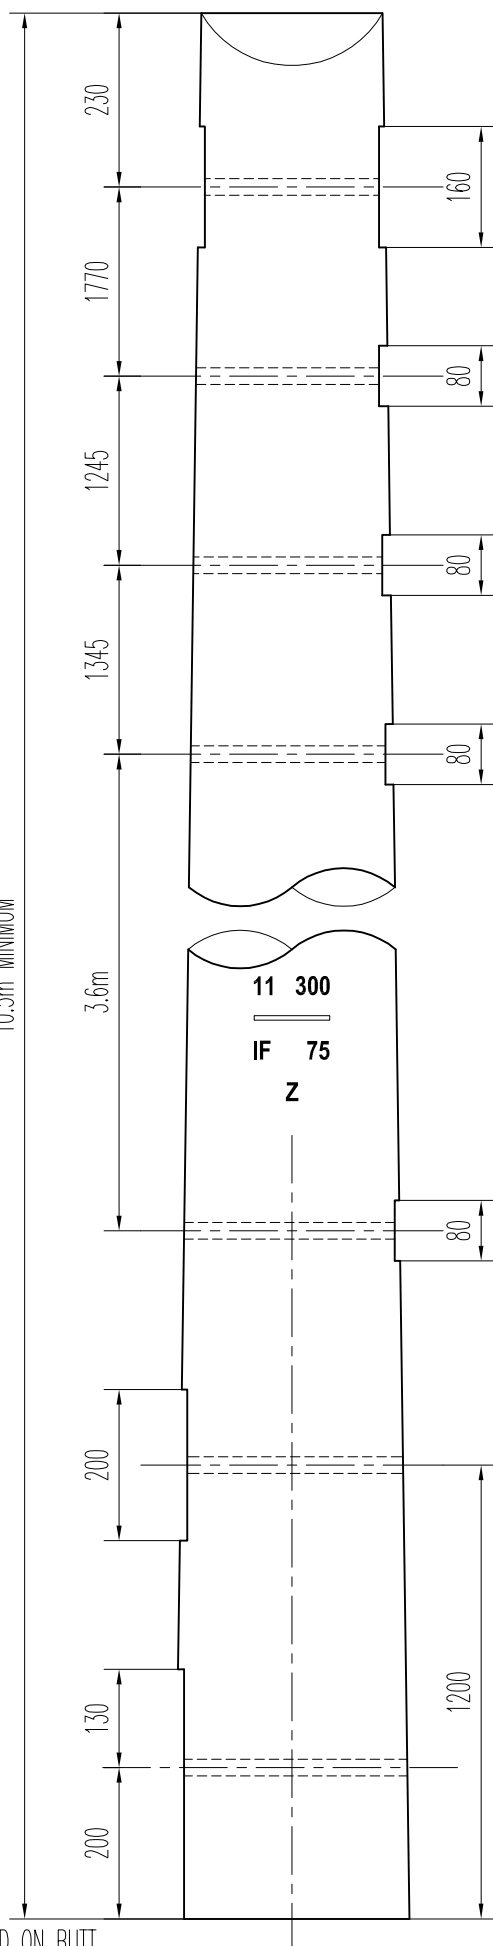

POLE SCARFED EQUALLY ON BOTH SIDES  
OF THE CENTRE LINE TO GIVE A MINIMUM  
50mm WIDE FLAT FACE

ALL DRILLINGS 22mm DIAMETER

ALL DIMENSIONS IN MILLIMETRES EXCEPT WHERE  
OTHERWISE STATED.

REFERENCE

- 11 - POLE LENGTH (m)
- 300 - POLE DIAMETER 1.5m FROM BUTT
- IF - IMPORTED FIR
- 75 - YEAR OF CREOSOTING
- Z - SUPPLIERS NAME OR MARK

GOUGE MARK 6mm WIDE x 6mm DEEP AND 3m  
FROM POLE BUTT.



ENATS Drawing No. 435005

Scarfig and Drilling - Cable Terminal Structure Auxiliary Pole