




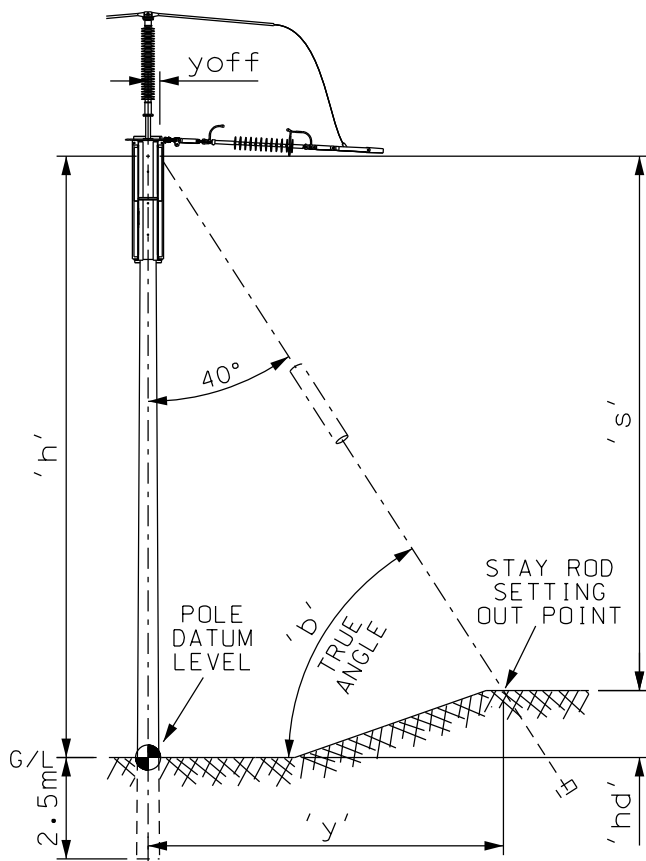

SIDE ELEVATION

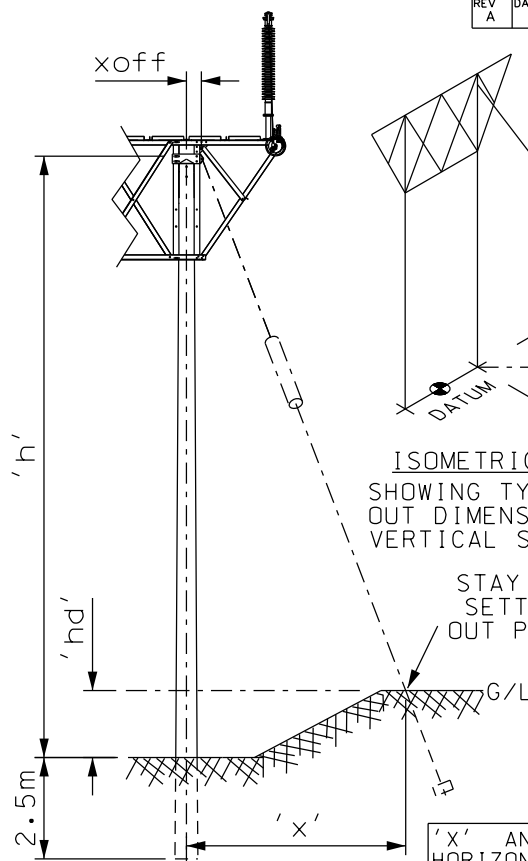

FRONT ELEVATION

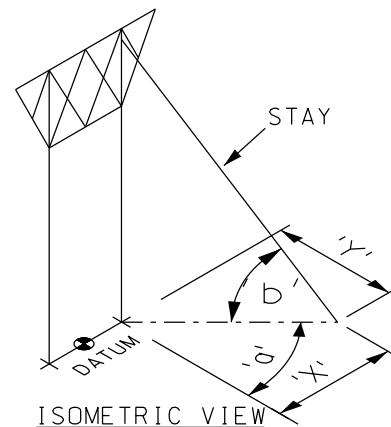

ISOMETRIC VIEW

SHOWING TYPICAL SETTING OUT DIMENSIONS AND TRUE VERTICAL STAY ANGLE 'b'

STAY ROD SETTING OUT POINT


'X' AND 'Y' VALUES ARE HORIZONTAL DISTANCES MEASURED FROM POLE CENTRES. THEY ARE NOT SLOPE DISTANCES

APPROXIMATE GUIDE FOR SETTING OUT STAY POSITIONS AT VARIOUS GROUND LEVELS

Overall Pole length (m)		13		14		15	
Att. Height above ground (m)		10.5		11.5		12.5	
Height Difference (hd) (m)		X (m)	Y (m)	X (m)	Y (m)	X (m)	Y (m)
STAY	3	5.39	3.81	6.07	4.29	6.76	4.77
LEVEL	2.5	5.73	4.05	6.42	4.53	7.10	5.01
ABOVE	2	6.07	4.29	6.76	4.77	7.45	5.25
POLE	1.5	6.42	4.53	7.10	5.01	7.79	5.49
DATUM	1	6.76	4.77	7.45	5.25	8.13	5.73
LEVEL	0.5	7.10	5.01	7.79	5.49	8.48	5.98
0		7.45	5.25	8.13	5.73	8.82	6.22
0.5	STAY	7.79	5.49	8.48	5.98	9.17	6.46
1	LEVEL	8.13	5.73	8.82	6.22	9.51	6.70
1.5	BELOW	8.48	5.98	9.17	6.46	9.85	6.94
2	POLE	8.82	6.22	9.51	6.70	10.20	7.18
2.5	DATUM	9.17	6.46	9.85	6.94	10.54	7.42
3	LEVEL	9.51	6.70	10.20	7.18	10.88	7.66

True Angle 'b' (deg) = 50
Splay Angle 'a' (deg) = 55

xoff (m) = 0.23
yoff (m) = 0.2

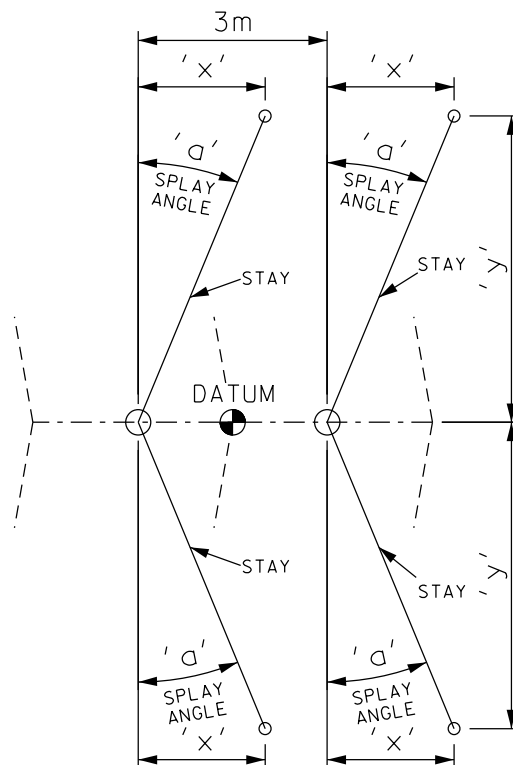

PLAN VIEW SHOWING SPLAY ANGLES

NOTE:-

1. SPLAY ANGLE IN PLAN VIEW 'a' = 55°
2. TRUE STAY ANGLE 'b' = 50°
3. 'hd' = MEASURED HEIGHT DIFFERENCE BETWEEN POLE G.L. DATUM AND STAY WIRE SETTING OUT POINT. THIS MUST BE DETERMINED FOR EACH STAY LOCATION BEFORE 'X' AND 'Y' SETTING OUT VALUES CAN BE USED.
4. SETTING OUT VALUES ARE FOR GUIDANCE ONLY. 'X' AND 'Y' VALUES STATED ARE HORIZONTAL DISTANCES VIEWED FROM ABOVE. TRUE VERTICAL STAY AND SPLAY ANGLES TO BE SITE VERIFIED PRIOR TO INSTALLATION.

$$'x' = 'xoff' + 's' \times (\sin 'a' / \tan 'b')$$

$$'y' = 'yoff' + 's' \times (\cos 'a' / \tan 'b')$$