
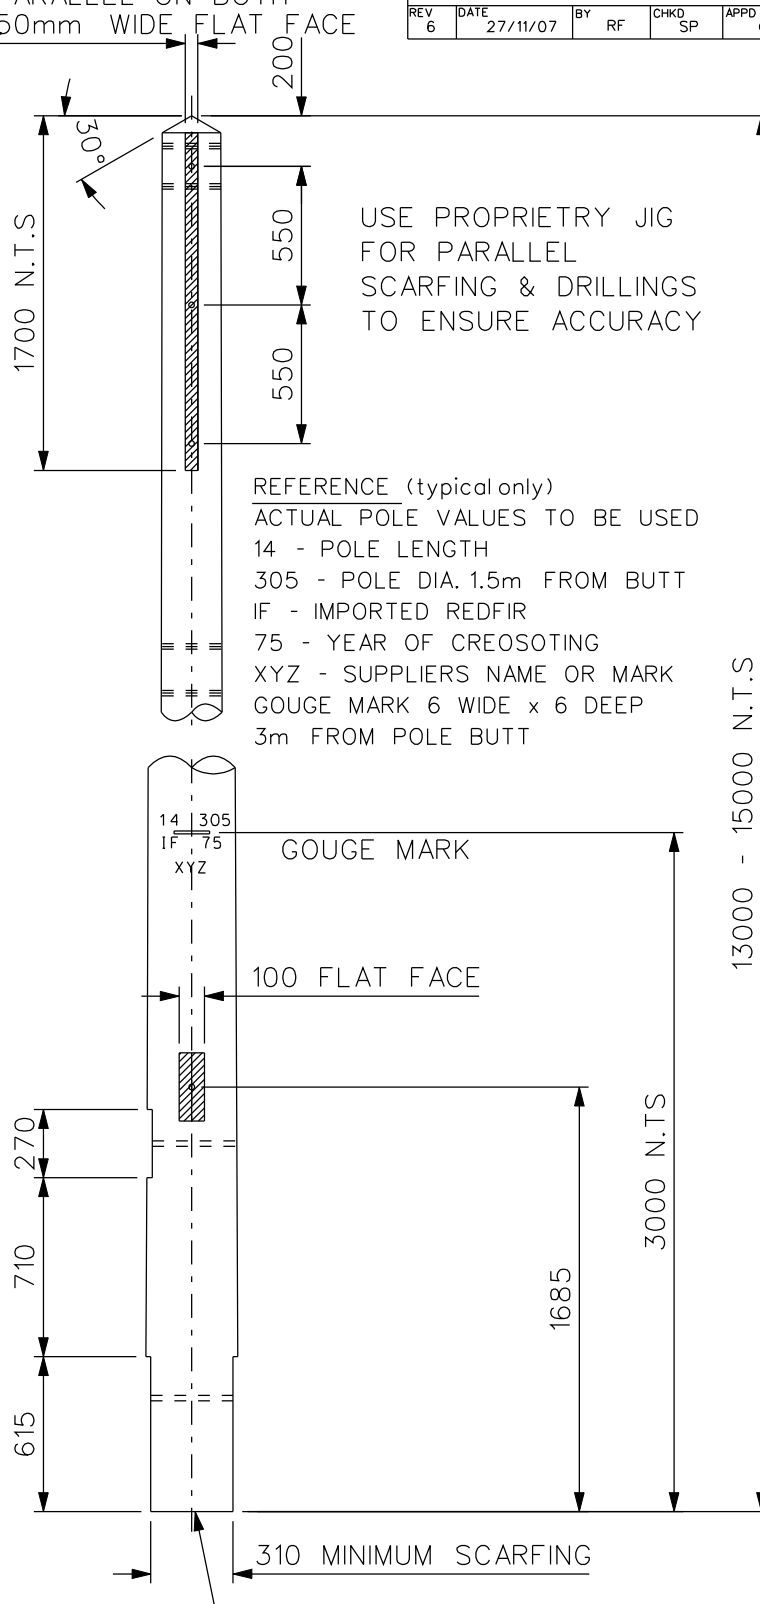


DESCRIPTION					FOR ISSUE				
REV	DATE	BY	RF	CHKD	SP	APPD			
6	27/11/07		RF		SP		GS		

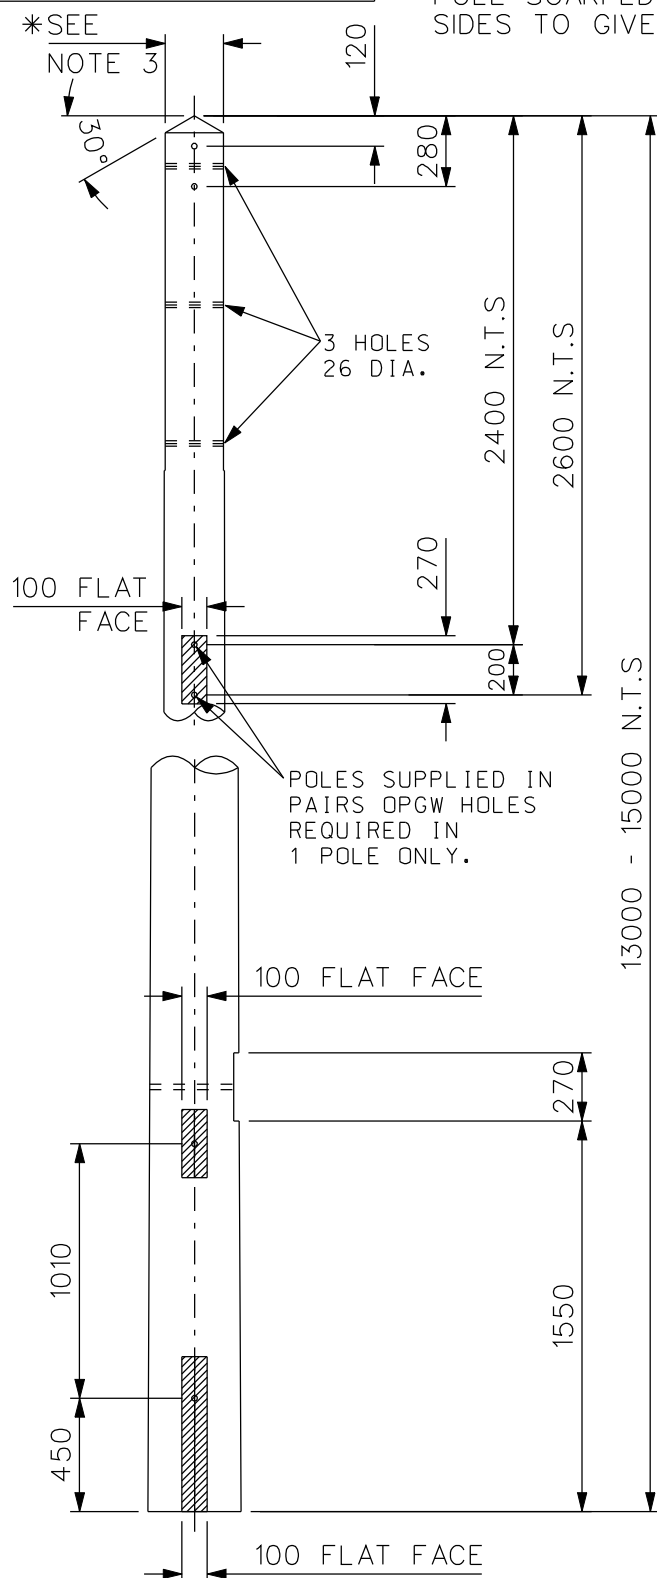

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN mm, UNLESS NOTED
2. ALL DRILLINGS TO BE 24mm DIAMETER HOLES - UNO
3. POLE SIZES BASED ON BS1990, EXTRA STOUT POLES RANGE
LENGTH = 13m - 15m & PARALLEL WITHIN LIMITS.
* MINIMUM TOP DIST BETWEEN FLATS = 200mm
* MAXIMUM TOP DIST BETWEEN FLATS = 265mm
MINIMUM DIAMETER 1.5m FROM BUTT = 305mm

POLE SIZE TO BE
IMPRESSED
ON THE BOTTOM

BAR MARK / ITEM NUMBER
TE651

SUPPLIER TO NOTE THESE DIMENSIONS ARE FOR GENERIC POLE DRILLING AND SCARFING ONLY TO SUIT A RANGE OF POLE SIZES, ACTUAL POLE MINIMUM DIMENSIONS TO BE SPECIFIED AT TIME OF ORDERING. ORDER VALUES WILL SUPERSEDE THESE STATED VALUES. MAXIMUM VALUE NOT TO BE EXCEEDED.

CLIENT	PowerSystems	TITLE	PART - WOOD POLE SCARFING DETAILS	SCALE	1 : 30	ORIGINAL SIZE	A4	LS TRANSMISSION CONSULTANCY LIMITED Yorkshire House York Road Little Driffield East Yorkshire YO25 5XA 01377 253617
				(UNLESS OTHERWISE STATED)		DATE	17/01/05	
DRAWN	JN			APPROVED	PP			
DRAWING NUMBER				REV				
LSTC/STD/PAR/651				6				
SPECIFICATION	OHL-03-132							