


USED ON LSTC/STD/GNA/500

POLE SCARFED PARALLEL ON BOTH  
SIDES TO GIVE 50mm WIDE FLAT FACE

| DESCRIPTION |          | FOR ISSUE |      |      |    |
|-------------|----------|-----------|------|------|----|
| REV         | DATE     | BY        | CHKD | APPD | GS |
| 6           | 28/11/07 | RF        | SP   |      |    |

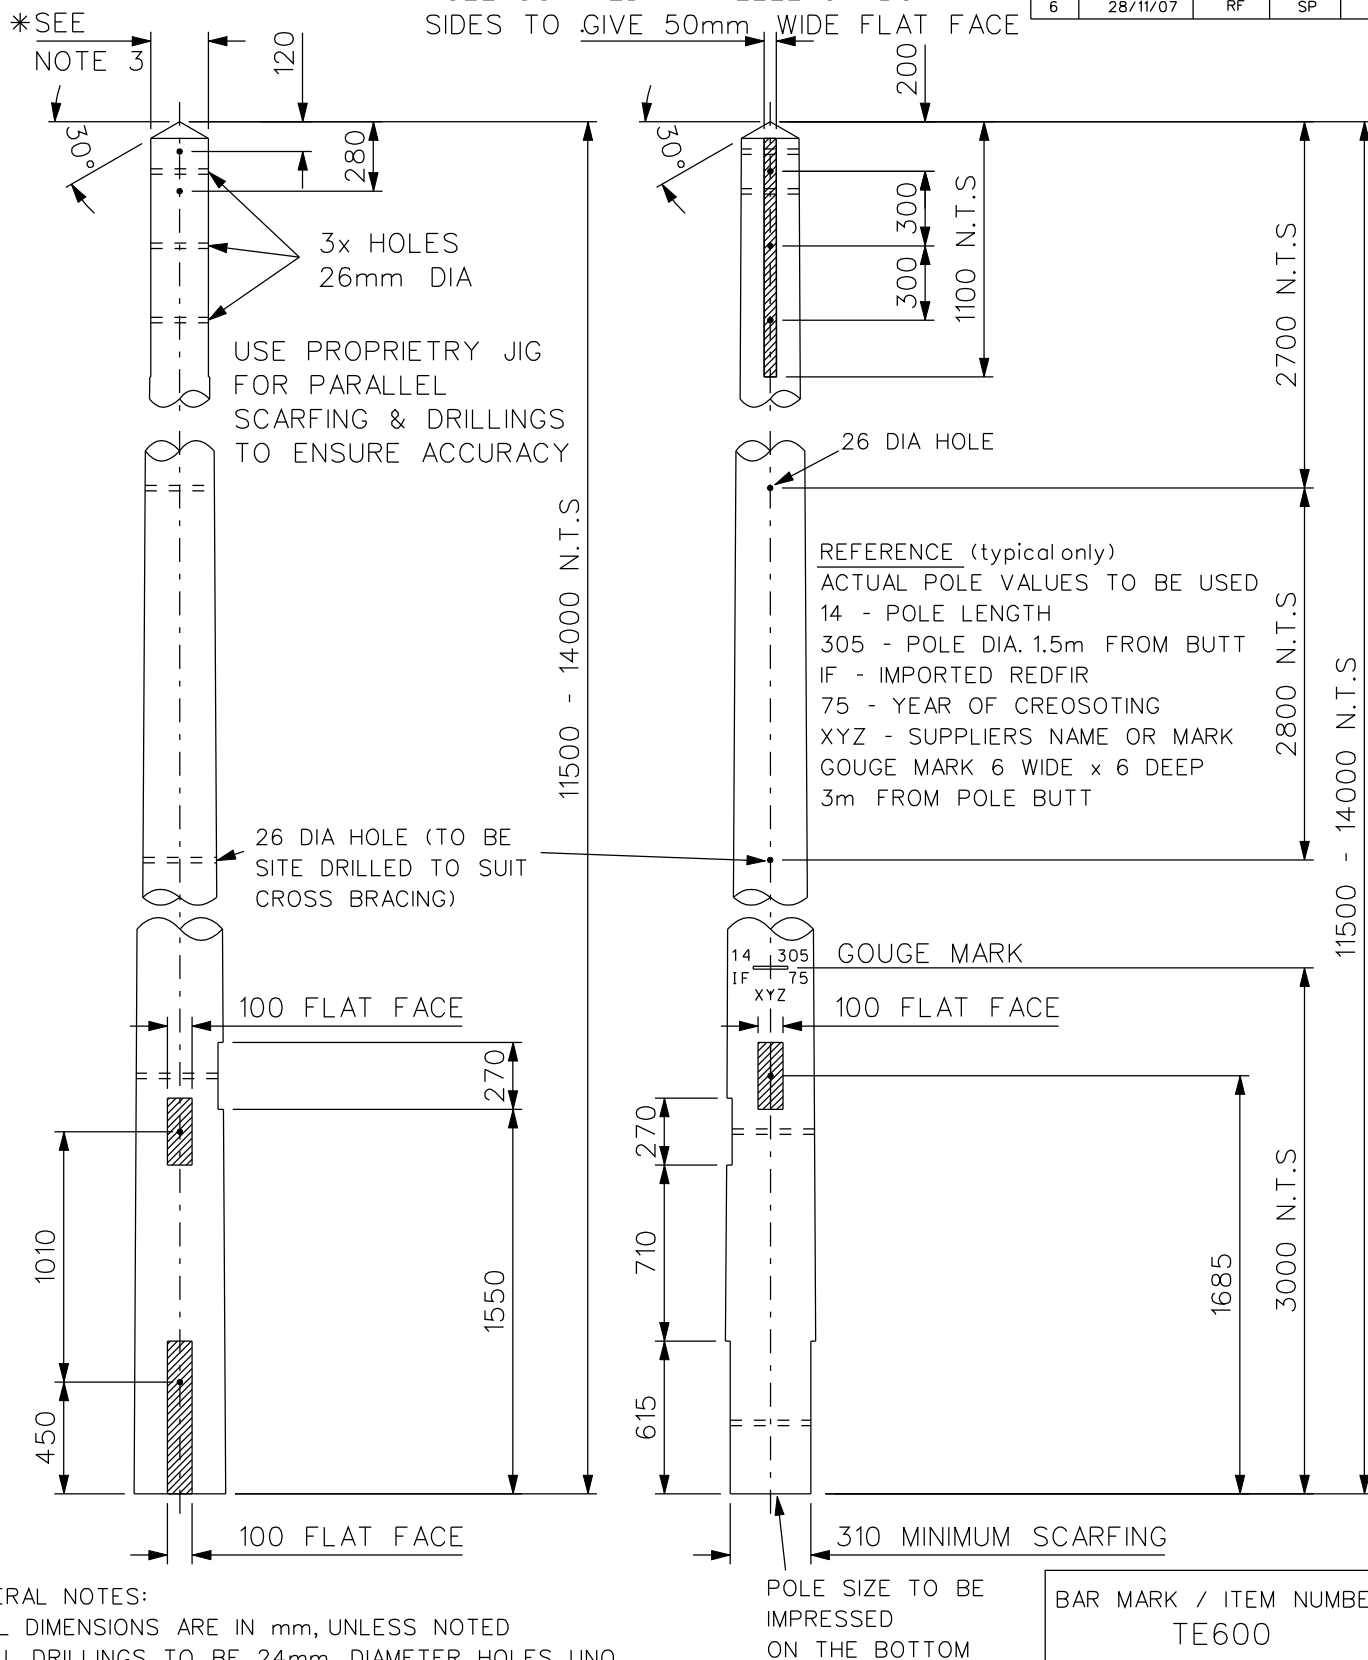

## GENERAL NOTES:

1. ALL DIMENSIONS ARE IN mm, UNLESS NOTED
2. ALL DRILLINGS TO BE 24mm DIAMETER HOLES UNO.
3. POLE SIZES BASED ON BS1990, EXTRA STOUT POLES RANGE

LENGTH = 11.5m - 14m &amp; PARALLEL WITHIN LIMITS

\* MINIMUM TOP DIST BETWEEN FLATS = 200mm

\* MAXIMUM TOP DIST BETWEEN FLATS = 265mm

MINIMUM DIAMETER 1.5m FROM BUTT = 305mm

SUPPLIER TO NOTE THESE DIMENSIONS ARE FOR GENERIC POLE DRILLING AND SCARFING ONLY TO SUIT A RANGE OF POLE SIZES, ACTUAL POLE MINIMUM DIMENSIONS TO BE SPECIFIED AT TIME OF ORDERING. ORDER VALUES WILL SUPERSEDE THESE STATED VALUES. MAXIMUM VALUE NOT TO BE EXCEEDED.

CLIENT  
PowerSystemsSPECIFICATION  
OHL-03-132TITLE  
PART -  
WOOD POLE  
SCARFING DETAILS  
'H' POLE INTERMEDIATESCALE  
1:30  
(UNLESS OTHERWISE STATED)DATE  
17/01/05DRAWN  
JNDRAWING NUMBER  
LSTC/STD/PAR/600ORIGINAL SIZE  
A4CHECKED  
GSAPPROVED  
PPREV  
6LS TRANSMISSION CONSULTANCY LIMITED  
Yorkshire House  
York Road  
Little Driffield  
East Yorkshire  
YO25 5XA  
01377 253617