


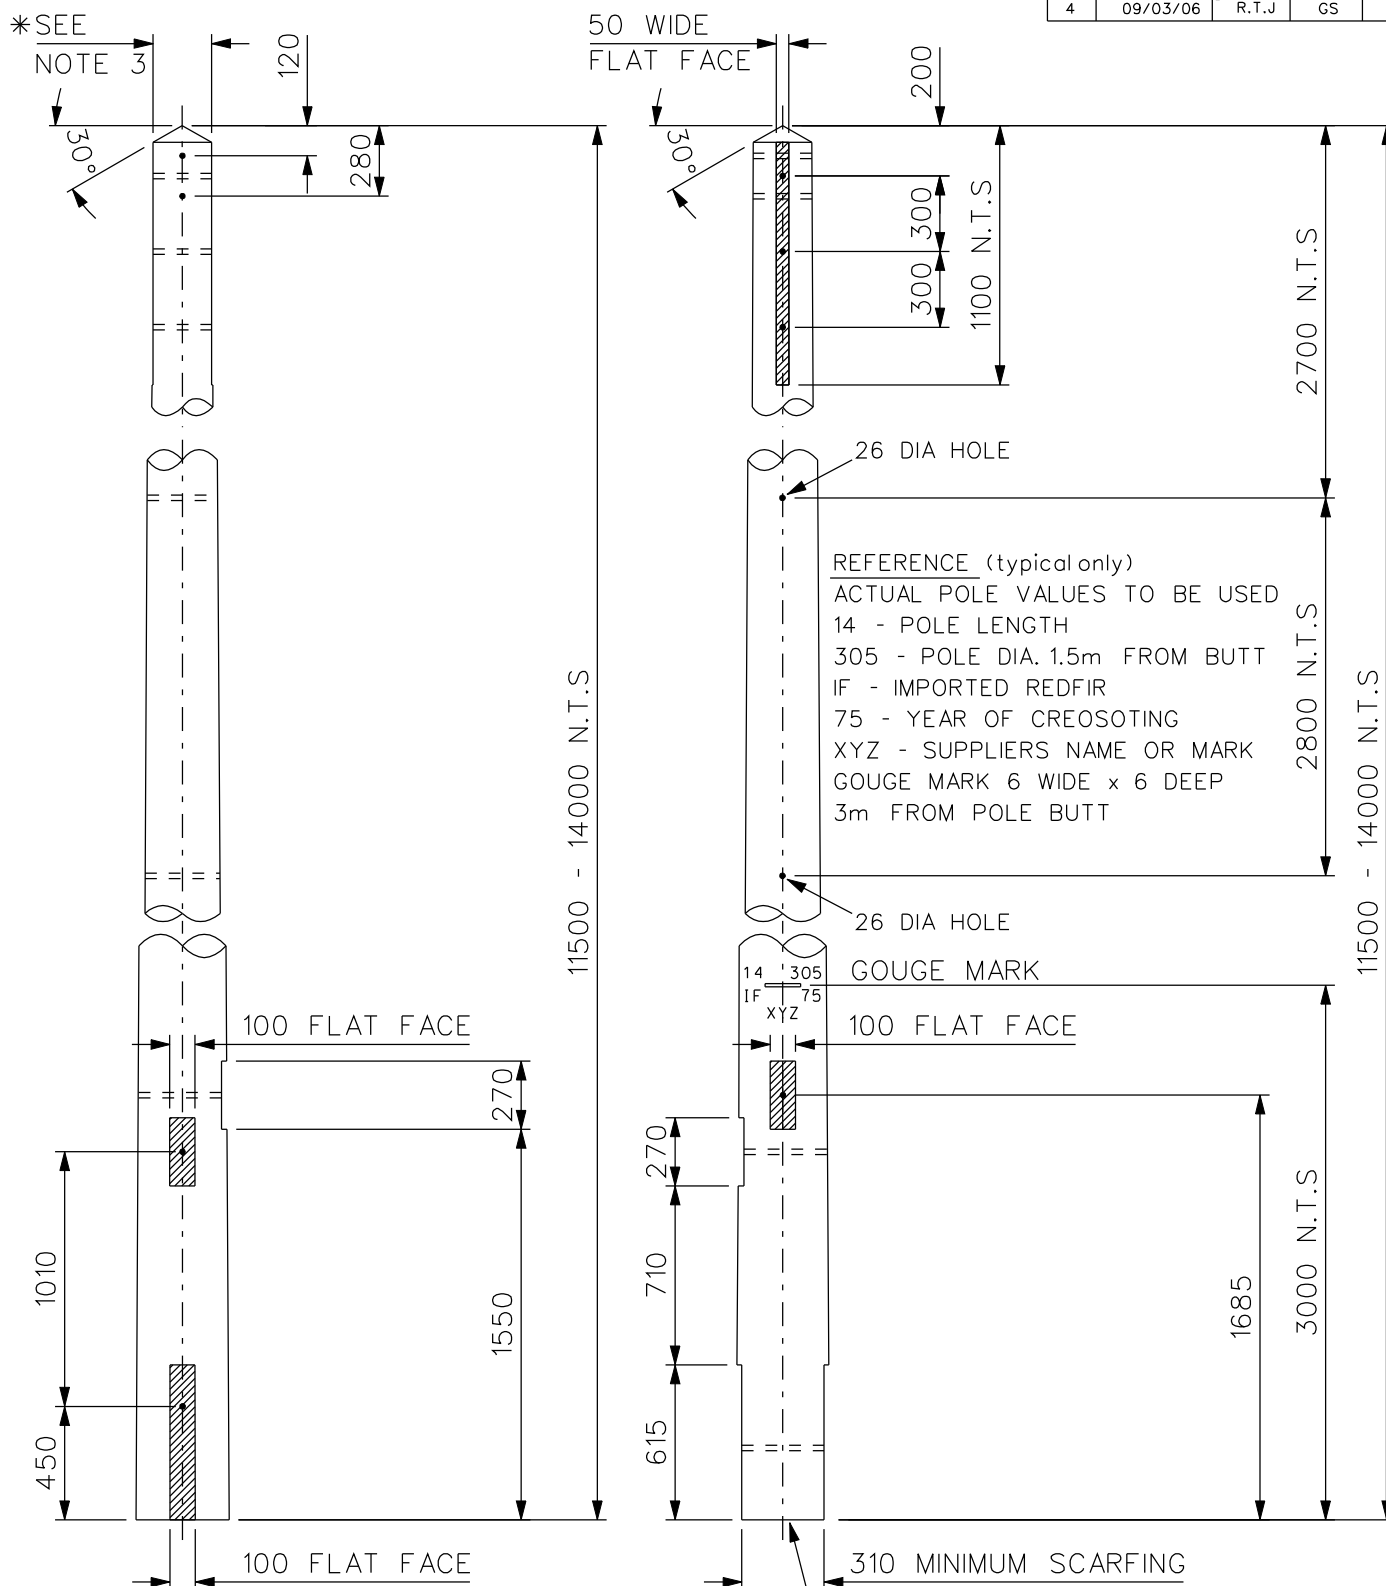

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN mm, UNLESS NOTED
2. ALL DRILLINGS TO BE 22mm DIAMETER HOLES UNO.
3. POLE SIZES BASED ON BS1990, EXTRA STOUT POLES

RANGE

LENGTH = 11.5m - 14m

* MINIMUM TOP DIST BETWEEN FLATS = 200mm

* MAXIMUM TOP DIST BETWEEN FLATS = 265mm

MINIMUM DIAMETER 1.5m FROM BUTT = 305mm

POLE SIZE TO BE
IMPRESSED
ON THE BOTTOM

BAR MARK / ITEM NUMBER
TE600

SUPPLIER TO NOTE THESE DIMENSIONS ARE FOR GENERIC POLE DRILLING AND SCARFING ONLY TO SUIT A RANGE OF POLE SIZES, ACTUAL POLE MINIMUM AND MAXIMUM DIMENSIONS TO BE SPECIFIED AT TIME OF ORDERING. ORDER VALUES WILL SUPERSEDE THESE STATED VALUES.

CLIENT
PowerSystems

PROJECT
NEW TRIDENT DESIGN

TITLE
WOOD POLE
SCARFING DETAILS

SCALE 1:30
(UNLESS OTHERWISE STATED)

DATE 17/01/05

DRAWN JN

DRAWING NUMBER
LSTC/STD/PAR/600

ORIGINAL SIZE A4

CHECKED GS

APPROVED PP

REV 4

LS TRANSMISSION CONSULTANCY LIMITED
Yorkshire House
York Road
Little Driffield
East Yorkshire
YO25 5XA
01377 253617