

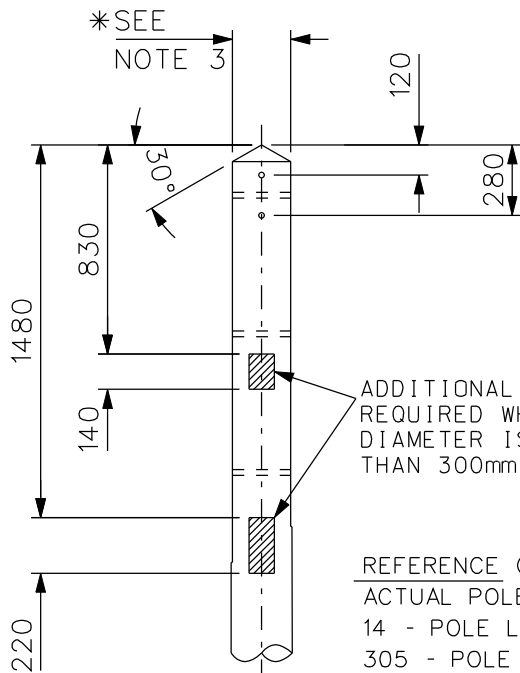


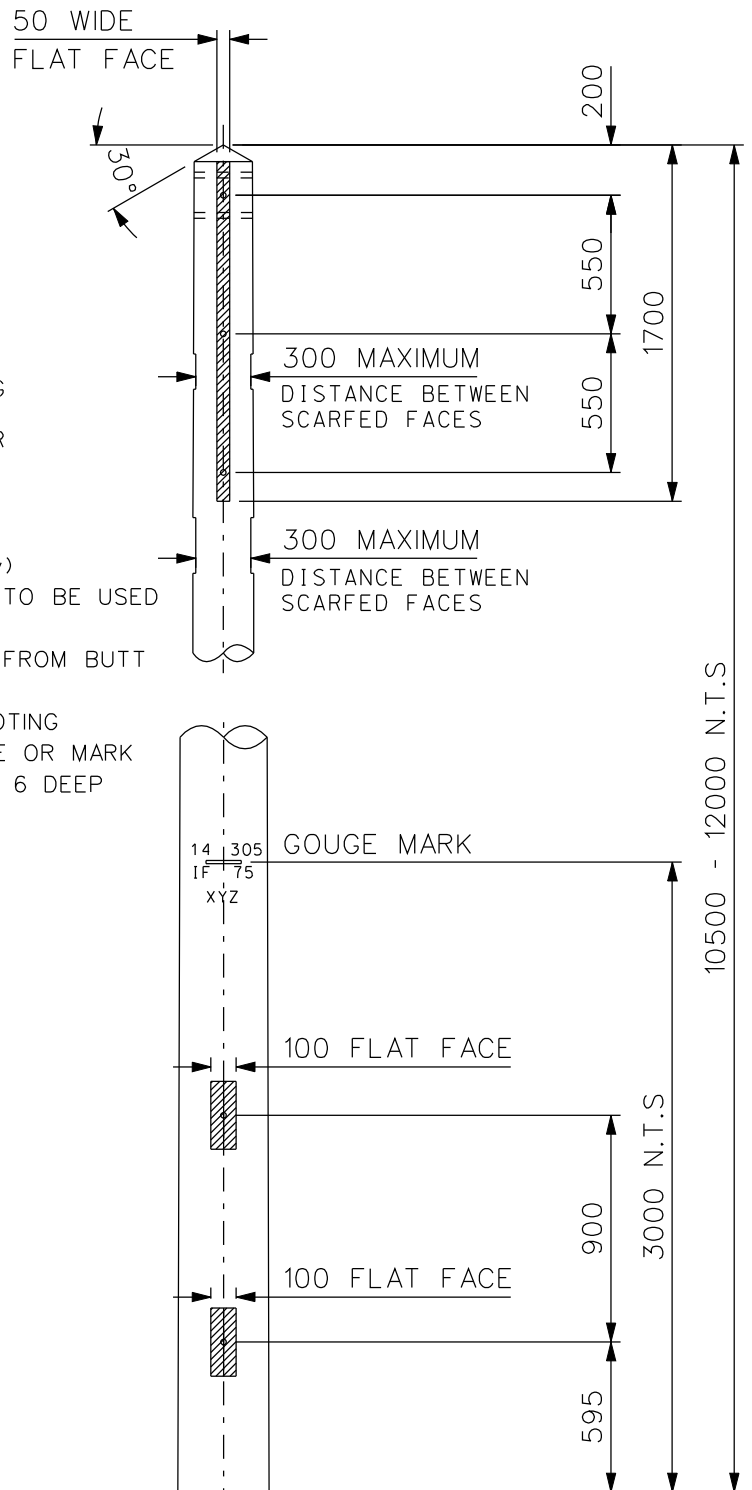

REFERENCE (typical only)
 ACTUAL POLE VALUES TO BE USED
 14 - POLE LENGTH
 305 - POLE DIA. 1.5m FROM BUTT
 IF - IMPORTED REDFIR
 75 - YEAR OF CREOSOTING
 XYZ - SUPPLIERS NAME OR MARK
 GOUGE MARK 6 WIDE x 6 DEEP
 3m FROM POLE BUTT

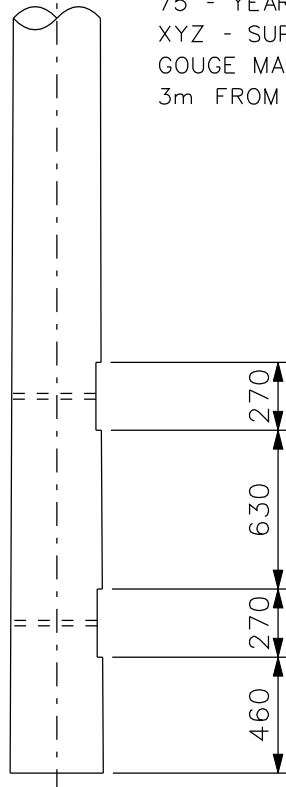

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN mm, UNLESS NOTED
2. ALL DRILLINGS TO BE 22mm DIAMETER HOLES
3. POLE SIZES BASED ON BS1990, EXTRA STOUT POLES RANGE

LENGTH = 10.5m - 12m

*MINIMUM TOP DIST BETWEEN FLATS = 280mm

*MAXIMUM TOP DIST BETWEEN FLATS = 345mm
 MINIMUM DIAMETER 1.5m FROM BUTT = 410mm

POLE SIZE TO BE
 IMPRESSED
 ON THE BOTTOM

BAR MARK / ITEM NUMBER
 TE625

SUPPLIER TO NOTE THESE DIMENSIONS ARE FOR GENERIC POLE DRILLING AND SCARFING ONLY TO SUIT A RANGE OF POLE SIZES, ACTUAL POLE MINIMUM AND MAXIMUM DIMENSIONS TO BE SPECIFIED AT TIME OF ORDERING. ORDER VALUES WILL SUPERSEDE THESE STATED VALUES.

CLIENT	PowerSystems
PROJECT	NEW TRIDENT DESIGN

TITLE	WOOD POLE SCARFING
-------	--------------------

SCALE	1:30 (UNLESS OTHERWISE STATED)	ORIGINAL SIZE	A4
DATE	17/01/05	CHECKED	GS
DRAWN	JN	APPROVED	PP
DRAWING NUMBER	LSTC/STD/PAR/625	REV	3