

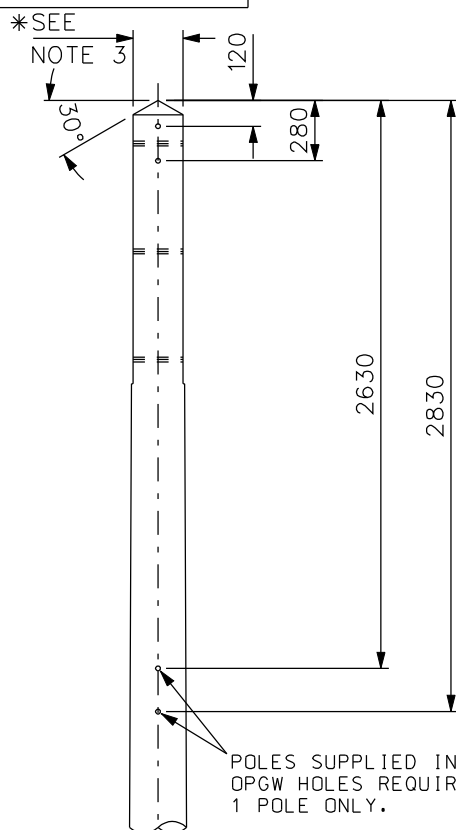


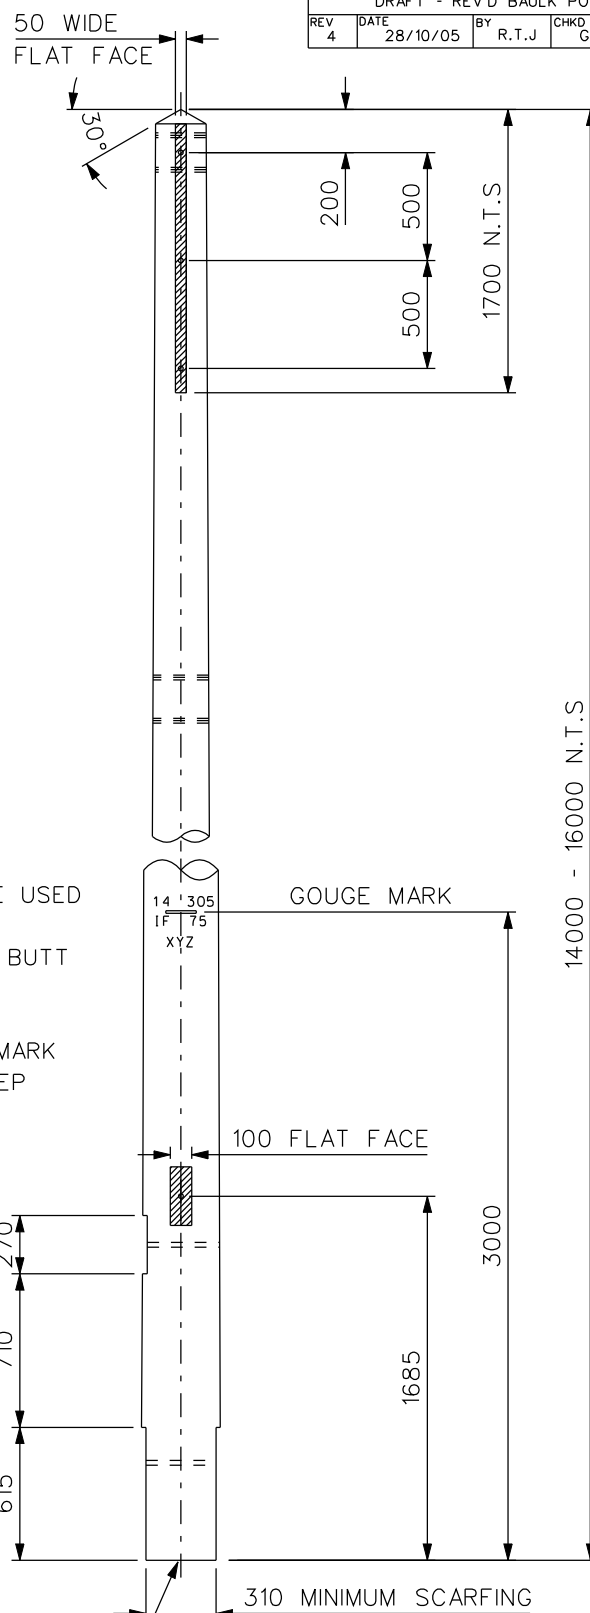

REFERENCE (typical only)
 ACTUAL POLE VALUES TO BE USED
 14 - POLE LENGTH
 305 - POLE DIA. 1.5m FROM BUTT
 IF - IMPORTED REDFIR
 75 - YEAR OF CREOSOTING
 XYZ - SUPPLIERS NAME OR MARK
 GOUGE MARK 6 WIDE x 6 DEEP
 3m FROM POLE BUTT

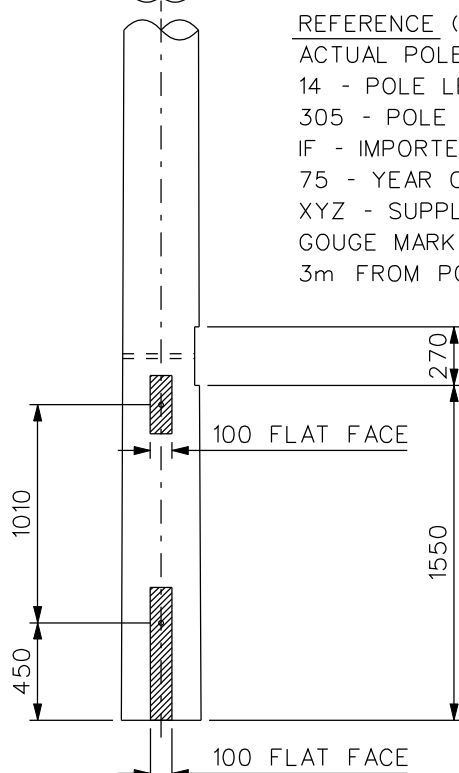

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN mm, UNLESS NOTED
2. ALL DRILLINGS TO BE 22mm DIAMETER HOLES
3. POLE SIZES BASED ON BS1990, EXTRA STOUT POLES RANGE
 LENGTH = 14m - 16m

- * MINIMUM TOP DIST BETWEEN FLATS = 200mm
- * MAXIMUM TOP DIST BETWEEN FLATS = 265mm
- MINIMUM DIAMETER 1.5m FROM BUTT = 305mm

POLE SIZE TO BE
 IMPRESSED
 ON THE BOTTOM

BAR MARK / ITEM NUMBER
 TE640

SUPPLIER TO NOTE THESE DIMENSIONS ARE FOR GENERIC POLE DRILLING AND SCARFING ONLY TO SUIT A RANGE OF POLE SIZES, ACTUAL POLE MINIMUM AND MAXIMUM DIMENSIONS TO BE SPECIFIED AT TIME OF ORDERING. ORDER VALUES WILL SUPERSEDE THESE STATED VALUES.

CLIENT	PowerSystems
PROJECT	NEW TRIDENT DESIGN

TITLE	WOOD POLE SCARFING DETAILS
-------	-------------------------------

SCALE	1 : 35 (UNLESS OTHERWISE STATED)
DATE	17/01/05
DRAWN	JN
DRAWING NUMBER	LSTC/STD/PAR/640
ORIGINAL SIZE	A4
CHECKED	GS
APPROVED	PP
REV	4

LS TRANSMISSION CONSULTANCY LIMITED
 Yorkshire House
 York Road
 Little Driffield
 East Yorkshire
 YO25 5XA
 01377 253617

