
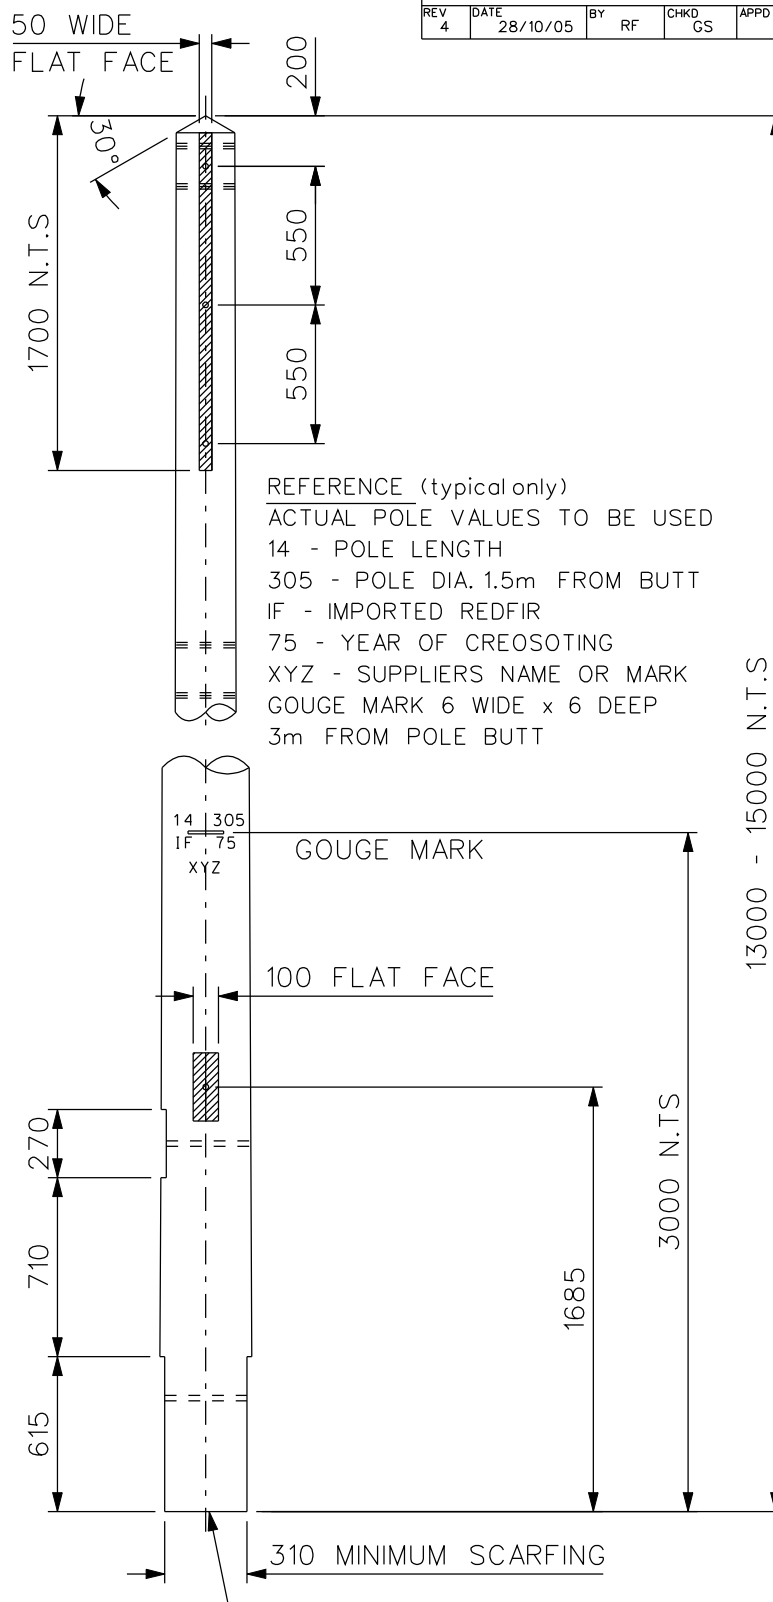


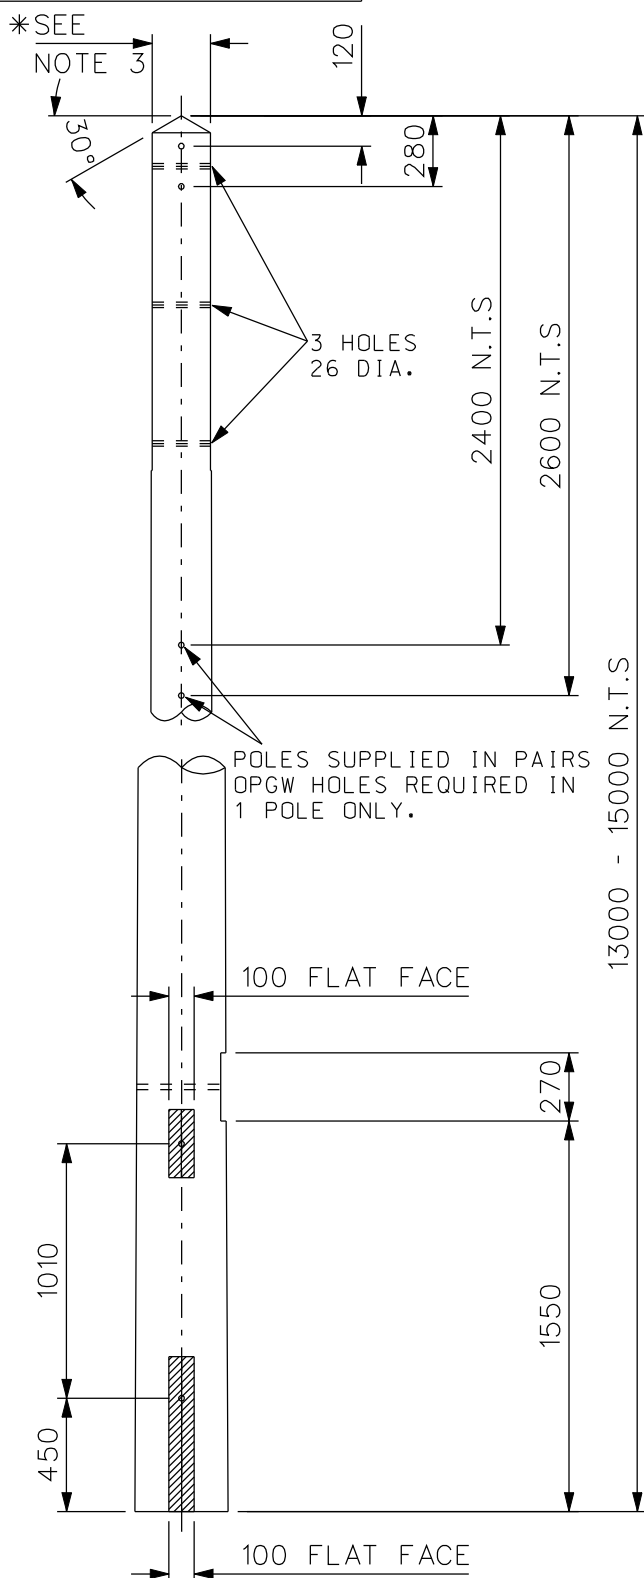

REFERENCE (typical only)
ACTUAL POLE VALUES TO BE USED
14 - POLE LENGTH
305 - POLE DIA. 1.5m FROM BUTT
IF - IMPORTED REDFIR
75 - YEAR OF CREOSOTING
XYZ - SUPPLIERS NAME OR MARK
GOUGE MARK 6 WIDE x 6 DEEP
3m FROM POLE BUTT

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN mm, UNLESS NOTED
2. ALL DRILLINGS TO BE 22mm DIAMETER HOLES - UNO
3. POLE SIZES BASED ON BS1990, EXTRA STOUT POLES

RANGE

LENGTH = 13m - 15m

* MINIMUM TOP DIST BETWEEN FLATS = 200mm

* MAXIMUM TOP DIST BETWEEN FLATS = 265mm

MINIMUM DIAMETER 1.5m FROM BUTT = 305mm

POLE SIZE TO BE
IMPRESSED
ON THE BOTTOM

BAR MARK / ITEM NUMBER
TE651

SUPPLIER TO NOTE THESE DIMENSIONS ARE FOR GENERIC
POLE DRILLING AND SCARFING ONLY TO SUIT A RANGE OF
POLE SIZES, ACTUAL POLE MINIMUM AND MAXIMUM
DIMENSIONS TO BE SPECIFIED AT TIME OF ORDERING.
ORDER VALUES WILL SUPERSEDE THESE STATED VALUES.

CLIENT	PowerSystems
PROJECT	NEW TRIDENT DESIGN

TITLE	WOOD POLE SCARFING DETAILS
-------	-------------------------------

SCALE	1: 30 (UNLESS OTHERWISE STATED)	ORIGINAL SIZE	A4
DATE	17/01/05	CHECKED	GS
DRAWN	JN	APPROVED	PP
DRAWING NUMBER	LSTC/STD/PAR/651	REV	4

LS TRANSMISSION CONSULTANCY LIMITED
Yorkshire House
York Road
Little Driffield
East Yorkshire
YO25 5XA
01377 253617

