
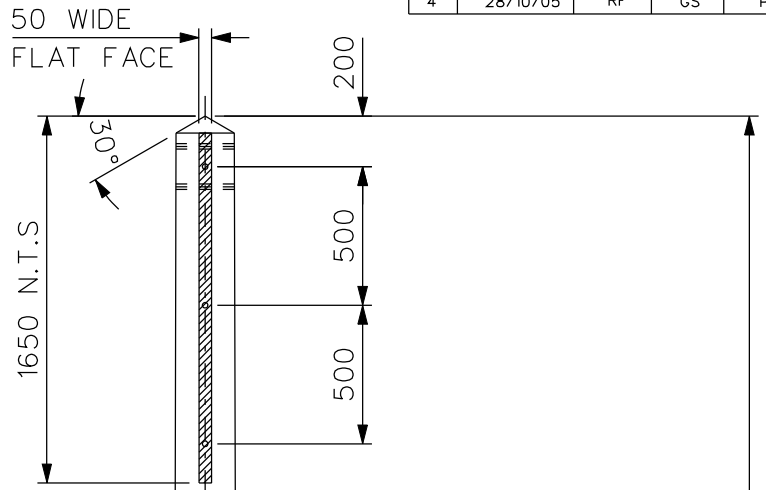


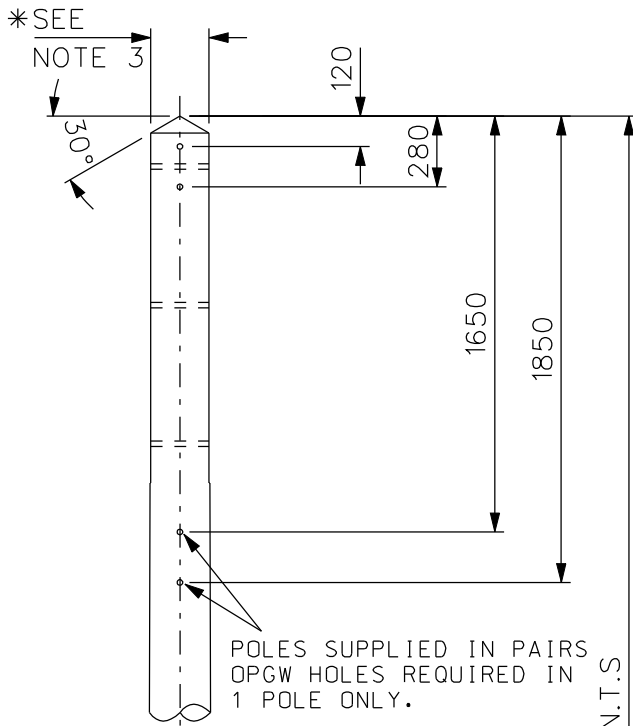

REFERENCE (typical only)

ACTUAL POLE VALUES TO BE USED

14 - POLE LENGTH

305 - POLE DIA.1.5m FROM BUTT



IF - IMPORTED REDFIR

75 - YEAR OF CREOSOTING

XYZ - SUPPLIERS NAME OR MARK

GOUGE MARK 6 WIDE x 6 DEEP

3m FROM POLE BUTT

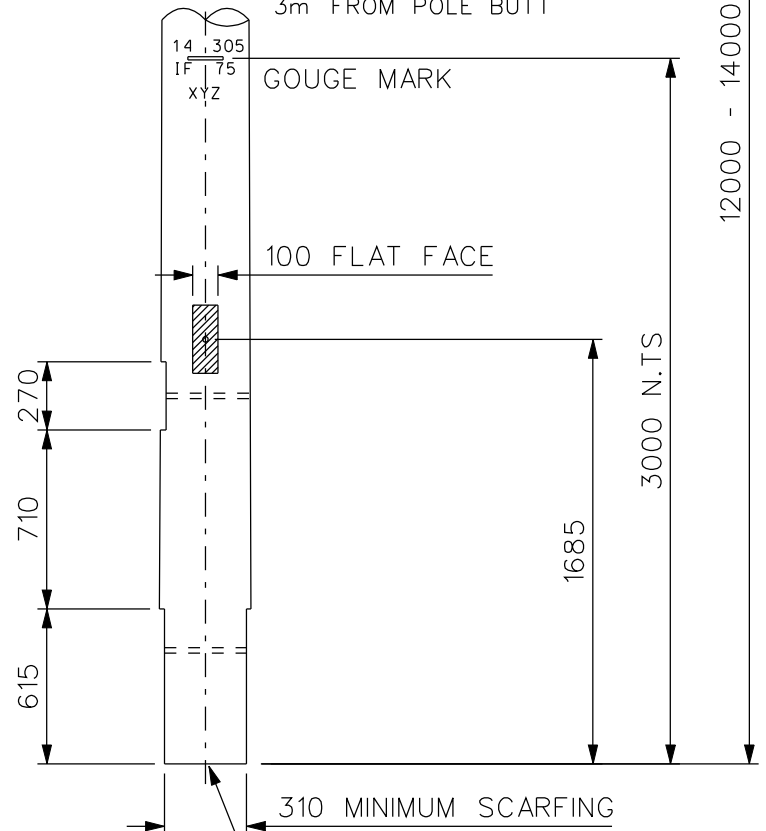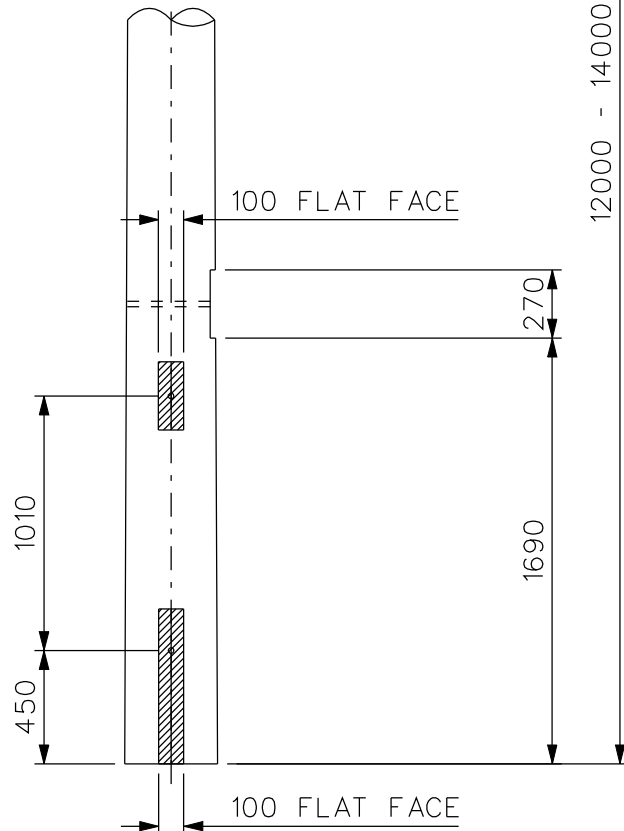

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN mm, UNLESS NOTED
2. ALL DRILLINGS TO BE 22mm DIAMETER HOLES
3. POLE SIZES BASED ON BS1990, EXTRA STOUT POLES

RANGE

LENGTH = 12m - 14m

* MINIMUM TOP DIST BETWEEN FLATS = 200mm

* MAXIMUM TOP DIST BETWEEN FLATS = 265mm

MINIMUM DIAMETER 1.5m FROM BUTT = 305mm

POLE SIZE TO BE
IMPRESSED
ON THE BOTTOMBAR MARK / ITEM NUMBER
TE667

SUPPLIER TO NOTE THESE DIMENSIONS ARE FOR GENERIC POLE DRILLING AND SCARFING ONLY TO SUIT A RANGE OF POLE SIZES, ACTUAL POLE MINIMUM AND MAXIMUM DIMENSIONS TO BE SPECIFIED AT TIME OF ORDERING. ORDER VALUES WILL SUPERSEDE THESE STATED VALUES.

CLIENT	PowerSystems
PROJECT	NEW TRIDENT DESIGN

TITLE	WOOD POLE SCARFING DETAILS
-------	-------------------------------

SCALE (UNLESS OTHERWISE STATED)	1 : 30	ORIGINAL SIZE	A4
DATE	17/01/05	CHECKED	GS
DRAWN	JN	APPROVED	PP
DRAWING NUMBER	LSTC/STD/PAR/667	REV	4

LS TRANSMISSION CONSULTANCY LIMITED
Yorkshire House
York Road
Little Driffield
East Yorkshire
YO25 5XA
01377 253617

