


DHL 5

07 2257

EDSU

NOTE:- ALL POLE DRILLINGS 22mm Ø



SCARFED BOTH FACES.

H.

Drill lag 'B' when specified

1-219 for poles upto & including 14.00m,
1524 for poles 14.00m & over

H MP 11/3
H MP 11/4
H MP 11/4 HS.
H MP 11/5
H MP 11/6
H MP 11/6 HS
H MP 13/3
H MP 13/5
H MP 14/1
H MP 14/2
H MP 14/3
H MP 14/4

FOUNDATION BLOCKS IF REQUIRED

MP 11 & 13 SERIES


2-M441/1
1-M441/3
1-M441/4 or 5

MP 14/1 & 14/2

2-M441/1
1-M442/1
1-M442/2 or 3

MP 14/3 & 14/4

2-M441/1
1-M442/1
1-M442/5 or 6

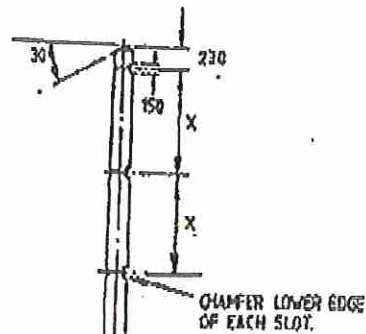

DIMENSION 'X'

MP 15/1 (1.1m)
MP 16/1 POST (1.52m)
MP 16/1 SUSP (2.00m)

I.

Drill lag 'B' when specified.

1-219 for poles upto & including 12.00m,
1524 for poles 13.00m & over

H MP 15/1
H MP 16/1 POST
H MP 16/1 SUSP

FOUNDATION BLOCKS IF REQUIRED

MP 15/1


2-M441/1
1-M442/4
1-M442/5 or 6

MP 16/1 POST

2-M441/1
1-M442/1
1-M442/2 or 3

MP 16/1 SUSP

2-M441/1
1-M442/4
1-M442/5 or 6

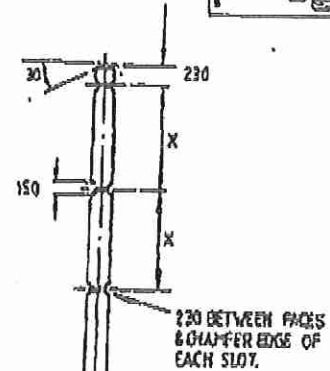

DIMENSION 'X'

MP 15/3 (1.7m)
MP 16/3 (1.52m)

J.

Drill lag 'B' when specified.

1-219 for poles upto & including 12.00m,
1524 for poles 13.00m & over

H MP 15/3
H MP 16/3

FOUNDATION BLOCKS IF REQUIRED

2-M441/1
1-M442/4
1-M442/5 or 6

NOTE-TREATED AS EST. STD. 43-88 ISSUE 2.

AS ORG. M450/4

POLE DRILLINGS MP TYPES AS SHOWN

DATE	27-8-92	 Mikenda Electricity plc
DESIGNED	RAC	
TRACED		
CHECKED		
APPROVED		

FIG. 1