


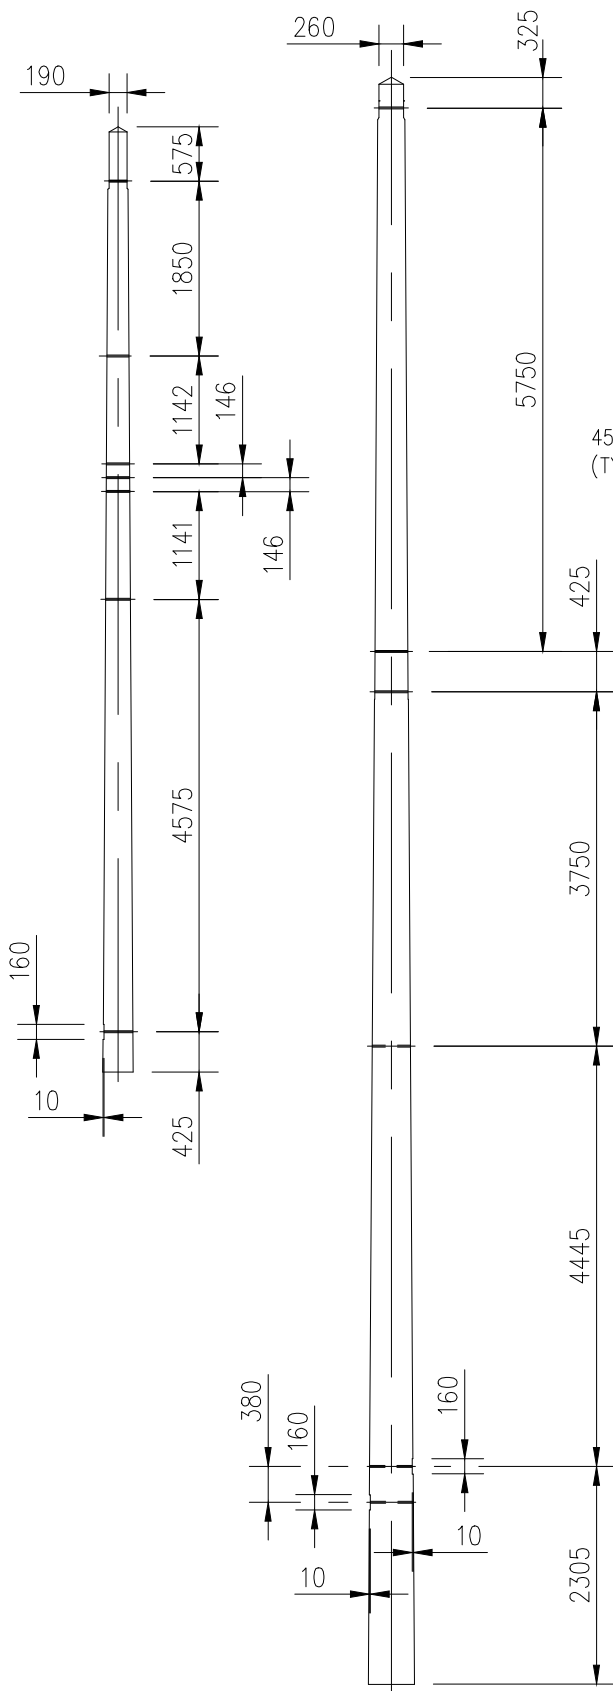


45° CHAMFER
(TYP)

POLE SIZE TO
BE IMPRESSED
ON POLE BUTT

SCARFING TO BE CUT TO GIVE A
50mm FACE ON BOTH FACES
OF POLE AND THE END
CHAMFERED OFF BEYOND THE
LENGTH SHOWN. UNLESS
SPECIFIED.

POLE SCARFED ON BOTH SIDES.
DRILLINGS 22mm DIA.

MARKING GENERALLY
AS BS1990



11x250
225T
SP GB
92XX
XYZ

1. LENGTH AND DIAMETER OR CLASS AT 1500mm
2. CHARACTERS TO BE GOUGED OR BRANDED 5mm WIDE, 3mm DEEP AND 25mm HIGH AS A MINIMUM
3. POLE TOP DIAMETER
4. TIMBER SPECIES, COUNTRY OF ORIGIN
5. YEAR OF PRESERVATION AND CHARGE No.
6. INITIALS OF SUPPLIER

NOTES: -

1. ALL DIMENSIONS ARE IN MILLIMETERS, UNLESS OTHERWISE SHOWN.
2. ALL POLE DRILLINGS ABOVE GROUND LEVEL WHICH ARE NOT USED, MUST BE PLUGGED WITH APPROVED WOOD POLE PLUGS.

Project
SOOTYWELL - BRECHIN TO FIDDES
132kV OHL DIVERSION

Title
POLES MEMBER DRILLING, SCARFING
AND MARKING

Drawn RSL Date 01.07.2016
Checked L.D Date 01.07.2016
Approved L.W Date 01.07.2016

Scale
NTS

CAD Ref Q:\projects\30000698\09_CAD\03_MSPS\04_civil\Plot Drawings

Project number
30000698

Drawing number
IDV-0013

Revision
C

**MORGAN
SINDALL**
PROFESSIONAL
SERVICES

Morgan Sindall Professional Services
20 Timothy's Bridge Road
Stratford Enterprise Park
Stratford-upon-Avon
Warwickshire CV37 9NJ
tel +44 (0)1789 204288
fax +44 (0)1789 413663
www.morgansindall.com

© Copyright