
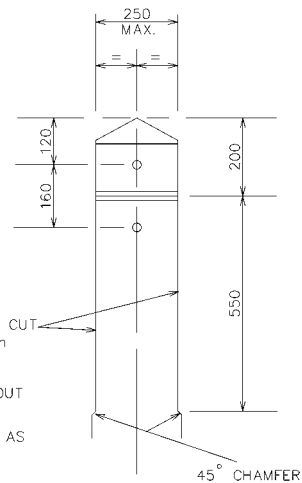






SCARFING TO BE CUT TO GIVE A 50mm WIDE FLAT ON BOTH FACES OF MEDIUM AND STOUT POLES. THE ENDS CHAMFERED OFF AS SHOWN.

DETAIL A'
SCALE 1:10

NOTES:

1. CLASS OF POLE TO BE 'STOUT.'
2. 'STOUT' CLASS POLES TO HAVE MINIMUM DIA. OF 210mm AT TOP.
3. POLES TO BE MATCHED.
4. ALL HOLES TO BE 22mm DIA. DRILLED AT RIGHT ANGLES TO VERTICAL CENTRE LINE OF POLE. ALL DRILLING AND CUTTING TO BE DONE STRICTLY TO TEMPLATE PRIOR TO PRESERVATION TREATMENT.
5. POLE BUTT TO BE CUT AT RIGHT ANGLES TO AXIS OF POLE.
6. POLE TO BE NOTCHED AND DRILLED FOR DUPLICATE 250 x 125 BAULKS.

0239




0239

DIM. 'X'

3000

DIM. 'X' PLUS 790

DIM. 'X' PLUS 190



POLE LENGTH. (m)	DIM. 'X' (mm)
9.0 - 11 INCLUSIVE.	1900
12.0	1700
13 - 15 INCLUSIVE.	1400
16 - 18 INCLUSIVE.	1100
20	500

POLE SIZE TO BE IMPRESSED ON POLE BUTT.



NEDL, Manor House, Station Road, Houghton le Spring, DH4 7LA.

H.V. OVERHEAD LINES
'H' POLE FABRICATION

Prepared by J.L.W.
Checked G.H. Date issued DEC 87

Org.No. 1 00 043 4002
Mod. A B C D

Sheet No. 1
Revised 1.10.2001
Scale 1:20 & 10