



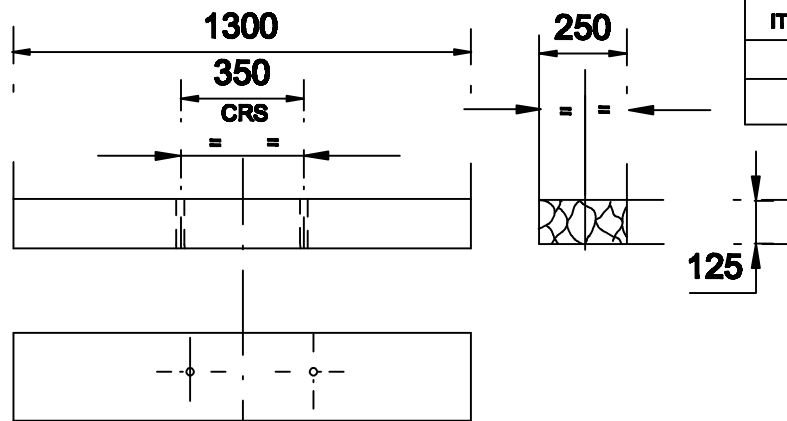

ITEM 6

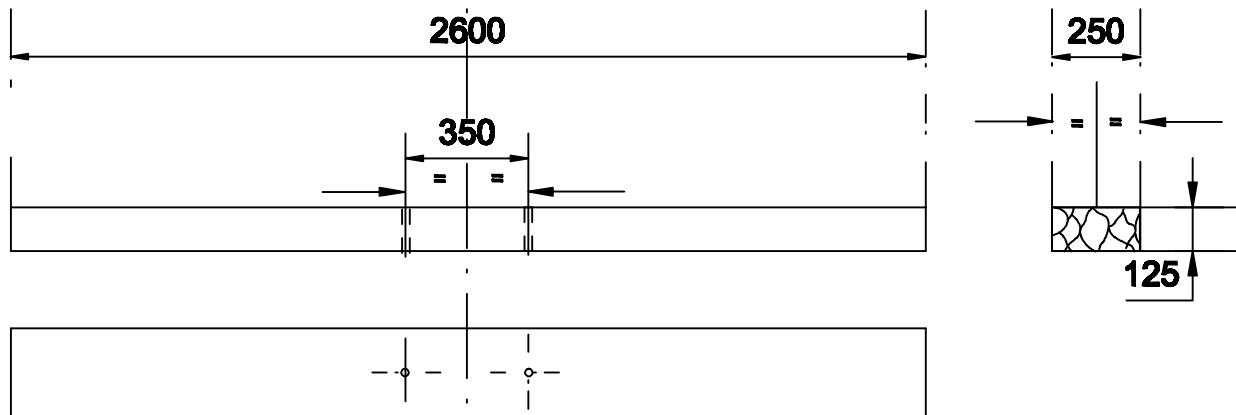


ITEM 7

NOTES:

1. TIMBER TO BE BALTIC REDWOOD, SCOTS PINE (PINUS SYLVESTRIS) OR FRENCH MARITIME PINE GENERALLY IN ACCORDANCE WITH BS1990 PART 1
2. BAULKS TO BE CUT FROM SWAN TIMBER TO PRODUCE RECTANGULAR SECTIONS
3. LONGITUDINALLY CUT SURFACES OF BAULKS SHALL BE STRAIGHT AND CLEAN CUT AND THE ANNULAR RINGS SHALL BE APPROX. PARALLEL TO THE WIDE FACE PLANNING NOT REQUIRED
4. BAULKS TO BE TREATED AFTER FABRICATION WITH (A) CREOSOTE TO BS913 (RUEPING PROCESS) OR (B) WATERBORNE SALTS (TANALITH C) TO BS4072
5. HOLES TO BE 22mm DIA.

ALL DIMENSIONS SHOWN ARE IN MILLIMETRES UNLESS OTHERWISE STATED



Prepared By

J.L.W

Checked

G.H.

Date issued

JUN 87

Lloyds Court, 78, Grey Street, Newcastle Upon Tyne, NE1 6AF

66kV OVERHEAD LINES
LAY TERMINAL STRUCTURE

Drg.No.

1 09 101 0650

Mod.

A B C

Sheet No.

2

Revised.

23.2.2005

Scale

1:20