

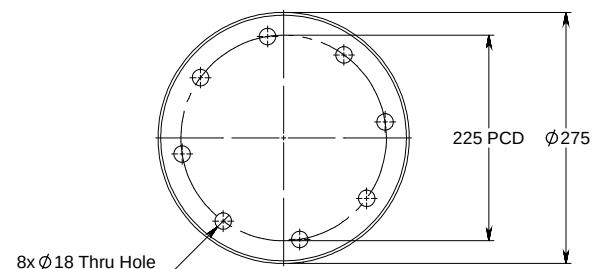


This drawing and its contents are confidential and exclusive property of PFISTERER (PTY) LTD. No publications, copies or distribution may be made without written consent by PFISTERER (PTY) LTD.

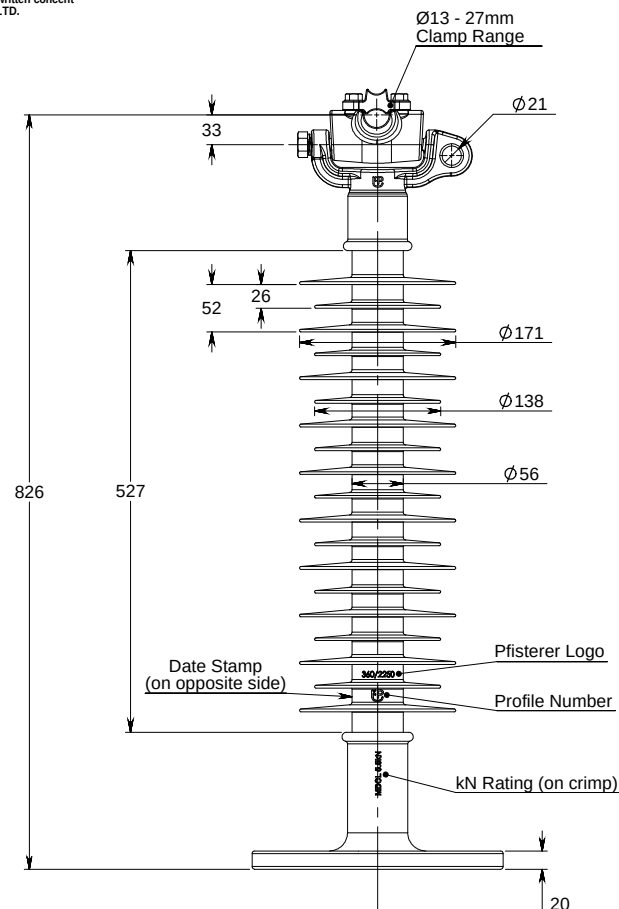


Insulator Markings:

Profile Number



Pfisterer Logo



Date Stamp



kN Rating

Technical Data:

One minute power frequency withstand voltage (50Hz, wet) =	175 kV
One minute power frequency withstand voltage (50Hz, dry) =	215 kV
Lightning impulse withstand voltage (1.2/50, positive) =	360 kV
Minimum arcing distance =	580 mm
Minimum creepage distance =	2250 mm
Specified cantilever load (SCL) =	12.5 kN
Maximum design cantilever load (MDCL) =	5.5 kN
Number of sheds (small / large) =	9/10
Mass (approx.) =	18.68 kg

Electrical & Mechanical Ratings are in acc. to IEC 61952

Material Data:

Housing: Injection Moulded HTV Silicone Rubber with ATH Filler (Grey, min. 3mm thk)
 Composite Core: Pultruded E-CR Glass Fibre & Epoxy Resin (Ø48mm Rod)
 End Fittings: Steel - Hot Dip Galvanized acc. to EN ISO 1461 (min. ave. 85µm thk)
 Conductor Clamp: Cast Aluminium

Description Silicone Line Post Insulator 360/2250 c/w Ø13-27mm Vertical Trunnion Cradle Clamp & 8xØ18x225mm PCD Flange Base	Unspecified Tolerances In acc. to: IEC 61952 IEC 62217 IEC 60815	Weight kg		Substitute for	
		Drawn By	03/10	CLN	
		Checked By	03/10	BOB	
			03/10	STS	
	Material			Revision	002
	Scale	Drawing/Part Number			
	N.T.S.		145 131-037		