



SUSPENSION CLAMP BODY  
KEEPER TYPE (WITH U-BOLTS)

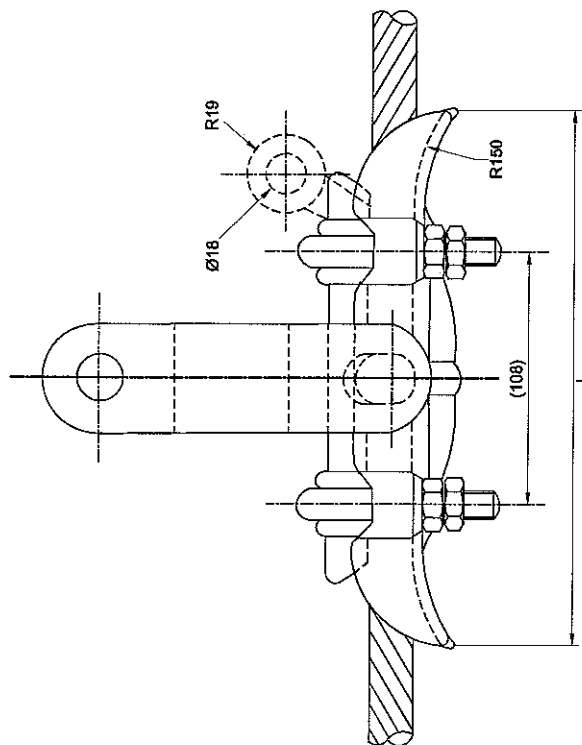

SUSPENSION CLAMP STRAP  
CLOSED TYPE

246010

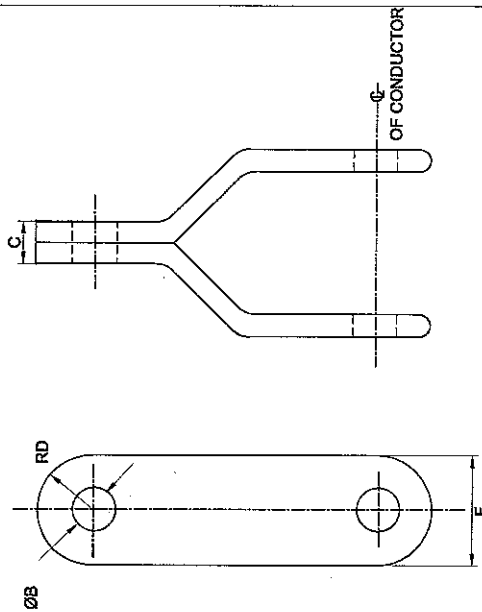

ALUMINIUM LINERS REQUIRED  
FOR A.C.S.R. CONDUCTORS ONLY

| NOM. AREA<br>(mm <sup>2</sup> ) | ACSR | DIA.<br>(mm) |
|---------------------------------|------|--------------|
| 100                             | *    | 14.15        |
| 150(18/1)                       | *    | 16.75        |
| 150(30/7)                       | *    | 18.13        |
| 175(30/7)                       | *    | 19.53        |
| 175<br>(COMP.)                  | *    | 16.43        |

NOTES:-

- CLAMP BODY TO BE OF ALUMINIUM CONSTRUCTION  
-OR-  
MALLEABLE CAST IRON CLAMP BODY TO COMPLY WITH B.S. 6881  
FITTED WITH ALUMINIUM LINERS FOR ALUMINIUM BASED CONDUCTORS  
(SEE HOLE ABOVE FOR CONDUCTOR SIZES.)
- FERROUS MATERIAL TO BE GALVANISED TO B.S.729 AFTER FABRICATION.
- ASSEMBLY GENERALLY AS B.S.3288 PART 2, FIG. 74.
- M.F.L. 70kN.

TABLE 28

DIMENSIONS OF SUSPENSION CLAMP BODY & CLOSED TYPE STRAP FOR LINE & EARTH  
CONDUCTORS: KEEPER TYPE & CLOSED TYPE STRAP.

| CONDUCTOR | MINIMUM<br>FAILING<br>LOAD | A     | ØB   | C  | D      | F    | G    | L     |
|-----------|----------------------------|-------|------|----|--------|------|------|-------|
| mm        | kN                         | mm    | mm   | mm | mm     | mm   | mm   | mm    |
| 13 TO 24  | 70                         | 127   | 17.5 | 12 | 25     | 50   | -    | (250) |
| 24 TO 34  | 95                         | 127   | 21.5 | 16 | (27.5) | (55) | (52) | (290) |
| 34 TO 38  | 125                        | (165) | 21.5 | 20 | (27.5) | (55) | (60) | (300) |

CE Electric UK

Lloyds Court, 78 Grey Street, Newcastle Upon Tyne, NE1 6AF

Manufacturer Details

Sheet No. 1 Scale N.T.S.

Prepared By Jean Ousley

Revised 04/02/08

Date Issued 04/02/08

Grid Reference

Type OVERHEAD

Ref No. C977837

Revision

Notes

Historic Drg.No.

LINES

1091010498