



This drawing and its contents are confidential and exclusive property of PFISTERER (PTY) LTD. No publications, copies or distribution may be made without written consent by PFISTERER (PTY) LTD.

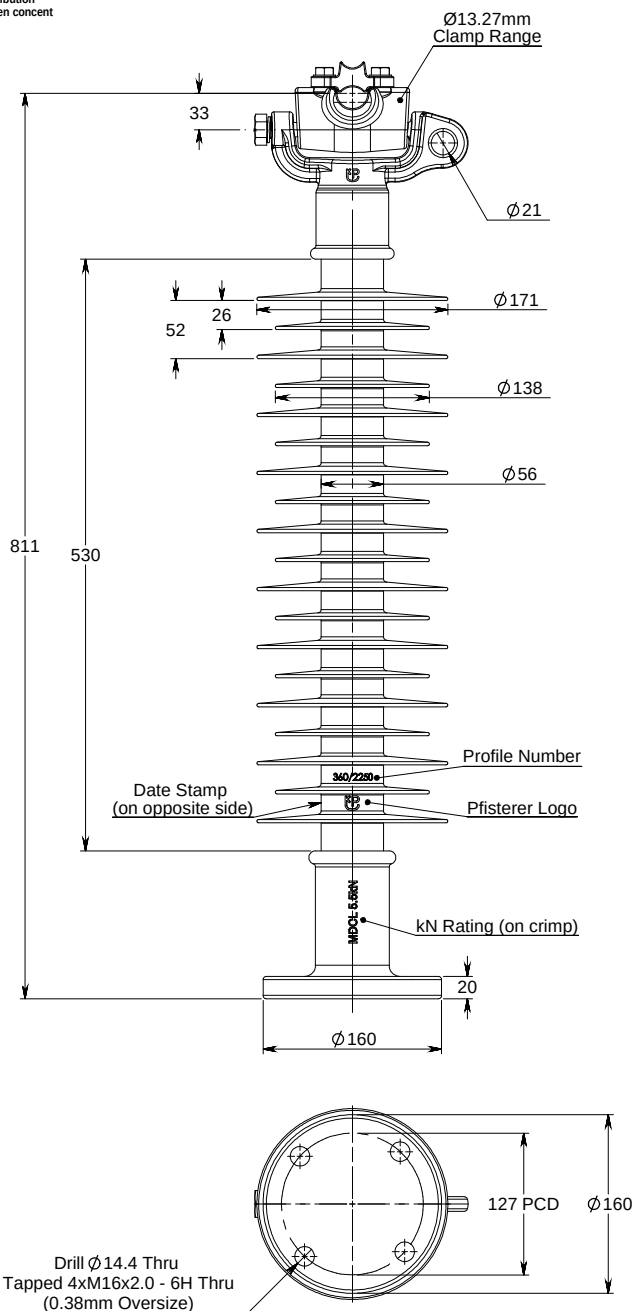


Insulator Markings:


Profile Number



Pfisterer Logo



Date Stamp



kN Rating

Technical Data:

One minute power frequency withstand voltage (50Hz, wet) = 175 kV
 One minute power frequency withstand voltage (50Hz, dry) = 215 kV
 Lightning impulse withstand voltage (1.2/50, positive) = 360 kV
 Minimum arcing distance = 580 mm
 Minimum creepage distance = 2250 mm
 Specified cantilever load (SCL) = 12.5 kN
 Maximum design cantilever load (MDCL) = 5.5 kN
 Number of sheds (small / large) = 9/10
 Mass (approx.) = 11.36 kg

Electrical & Mechanical Ratings are in acc. to IEC 61952

Material Data:

Housing: Injection Moulded HTV Silicone with ATH Filler (Grey, min. 3mm thk)
 Composite Core: Pultruded E-CR Glass Fibre & Epoxy Resin (Ø48mm Rod)
 End Fittings: Steel - Hot Dip Galv. in acc. to EN ISO 1461 (min. ave. 85µm thk)
 Conductor Clamp: Cast Aluminium

Description Silicone Line Post Insulator 360/2250 c/w Ø13-27mm Vertical Cradle Clamp & 4xM16x127mm PCD Flange Base	Unspecified Tolerances In acc. to: IEC 61952 IEC 62217 IEC 60815	Weight kg		Substitute for	
		Drawn By	03/10	CLN	
		Checked By	03/10	JEG	
		Approved By	03/10	STS	
	Material			Revision	000
	Scale	Drawing/Part Number			
	N.T.S.	145 131-114			