


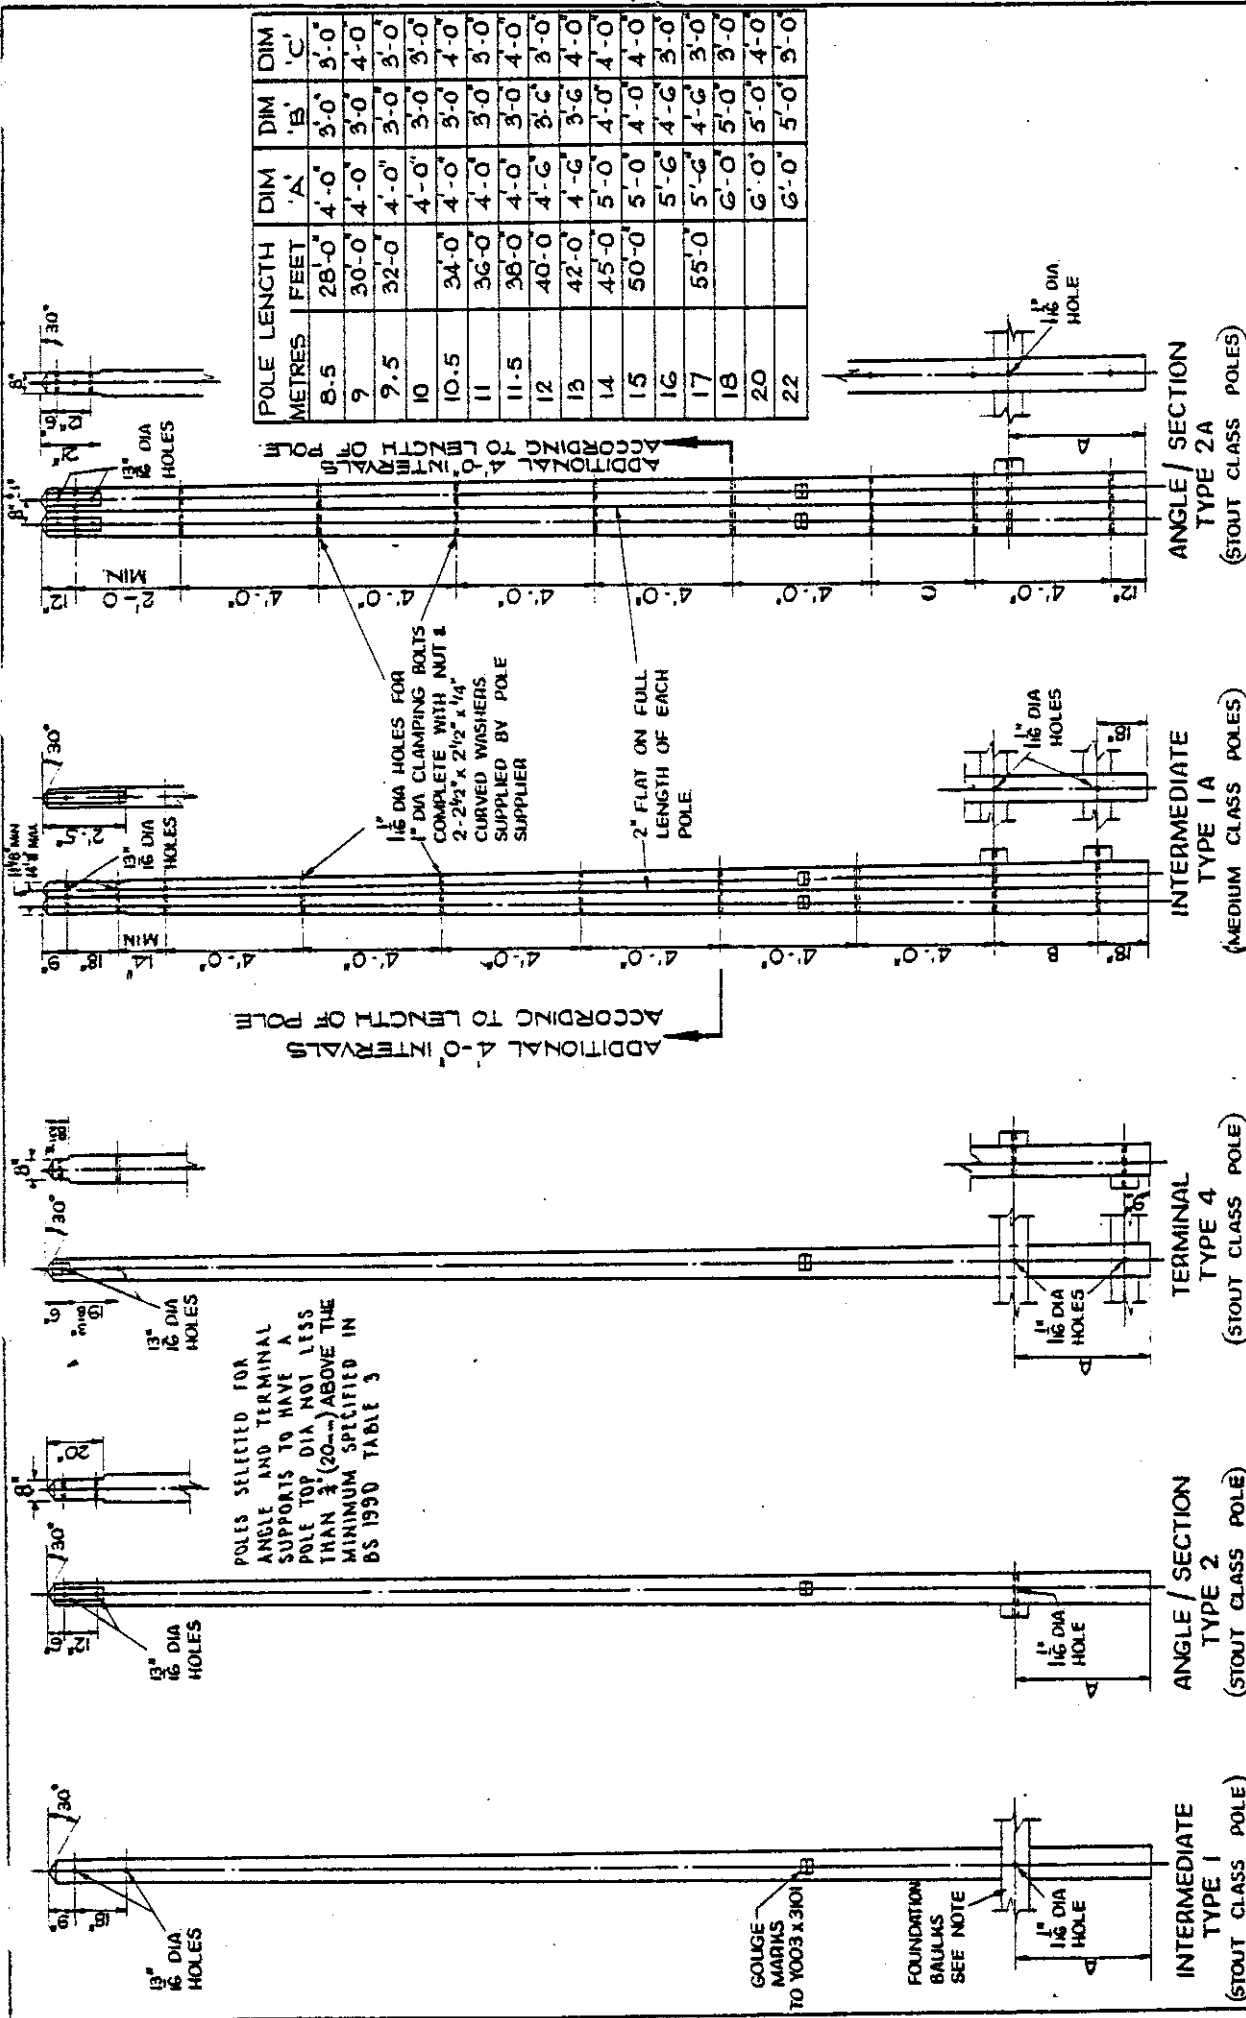

POLE APPLICATION		MATERIALS	
SUPPORT	33kV CE/35	POLES TO BS 1990.	
INTER	COPPER	BOLTS TO BS 596 THREADED B.S. WHIT.	
ANGLE	1	GALVANISED TO BS 729.	
SECTION	2	CREOSOTING TO BS 913 RUEPING PROCESS.	
TERMINAL	4	TWIN POLES TO BE BOLTED TOGETHER BEFORE CREOSOTING WITH NUTS, SLAGGED 2 FULL TURN.	
		NUTS FULLY TIGHTENED AFTER CREOSOTING.	