


Low voltage

600/1000 V three-core Waveform cables AL

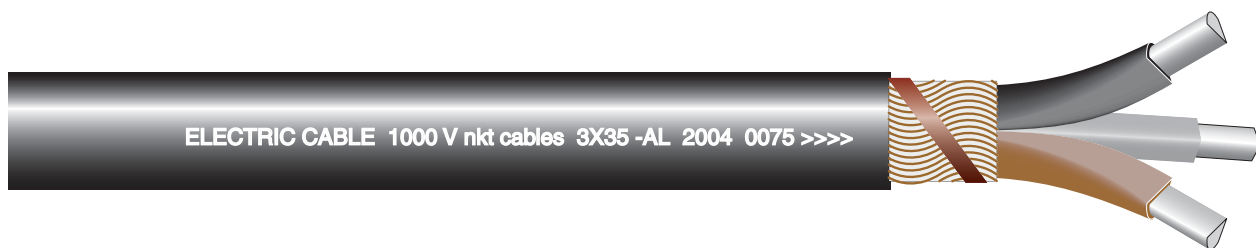

Application

Application	600/1000 V A.C. Electricity distribution cable.
Conductor temperature	Max. 90°C
Short circuit temperature	Max. 250°C
Installation temperature	Min. - 0°C
Min. radius of bend	10 x D
Max. pullings tension	Directly on conductor 30 N/mm ² of total conductor cross section.

Construction

Conductor	35 mm ² Circular solid aluminium conductor 70-300 mm ² Sector shaped solid aluminium conductor
Insulation	XLPE
Colour marking of cores	Brown - black - grey (Red - Yellow - blue, on request)
Inner sheath	EPDM - rubber
Concentric conductor	Copper waveform wires with at copper tape applied.
Outer sheath	PVC
Colour of sheath	Black

Technical

Standard	BS 7870 - 3.40
Marking of sheath	ELECTRIC CABLE 1000 V nkt cables 'Dimension' 'Year' 'Metres' (additional text on request)
Rated voltage	1000 V AC between phases
Standard length	250 m

Number of cores and cross section	Number and diameter of wires in concentric conductor	Insulation thickness	Thickness of sheath	Outer diameter (D)	Approx weight	Standard length	Diameter of drum
mm ²	mm	mm	m	mm	kg pr. km	m	m
3X35	30X1.13	0.9	1.8	26.5	1350	250	1.2
3X70	30X1.35	1.1	1.9	31.2	1850	250	1.2
3X95	30X1.58	1.1	2.1	34.6	2600	250	1.5
3X120	30X1.78	1.2	2.2	38.6	3250	250	1.5
3X150	42X1.87	1.4	2.3	41.3	4100	250	1.5
3X185	42X1.87	1.6	2.5	45.8	5000	250	1.8
3X300	42X1.87	1.8	2.8	54.7	6000	250	2.0