

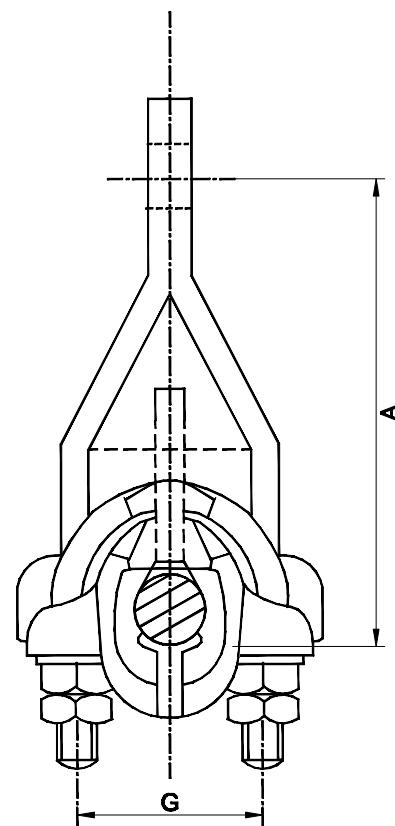
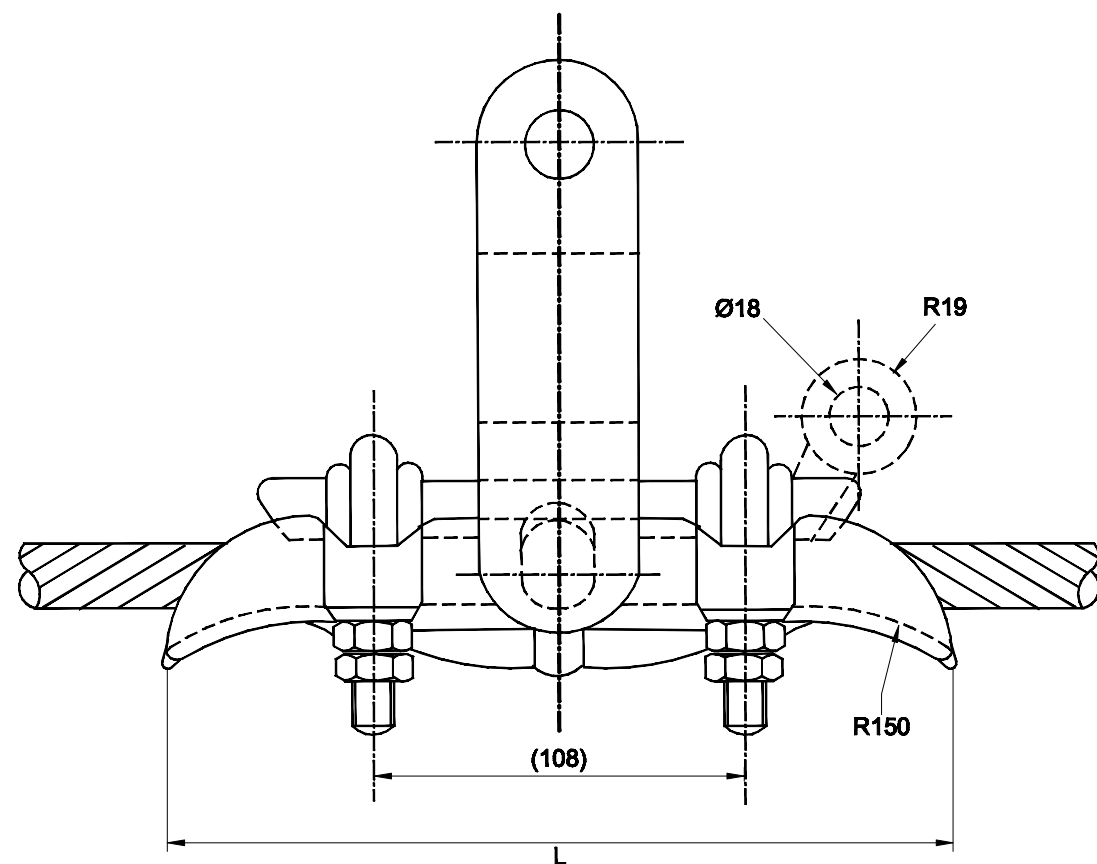


**SUSPENSION CLAMP BODY
KEEPER TYPE (WITH U-BOLTS)**

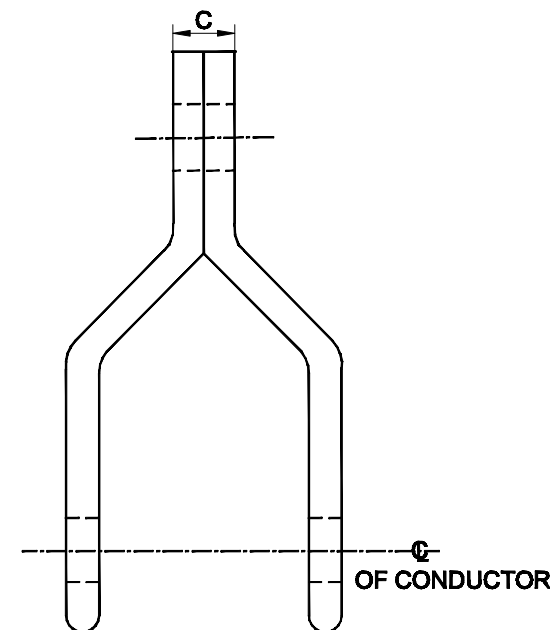

**SUSPENSION CLAMP STRAP
CLOSED TYPE**

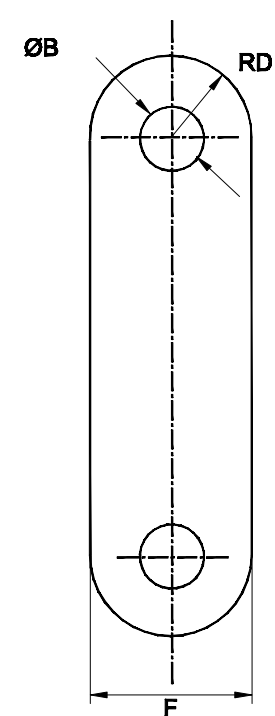

**ALUMINIUM LINERS REQUIRED
FOR A.C.S.R. CONDUCTORS ONLY**

NOM. AREA (mm) ²		DIA. (mm)
100	ACSR	14.15
150(18/1)	"	16.75
150(30/7)	"	18.13
175(30/7)	"	19.53
175 (COMP.)	"	16.43

NOTES:-

- CLAMP BODY TO BE OF ALUMINIUM CONSTRUCTION
- OR -
- MALLEABLE CAST IRON CLAMP BODY TO COMPLY WITH B.S. 6681
FITTED WITH ALUMINIUM LINERS FOR ALUMINIUM BASED CONDUCTORS
(SEE HOLE ABOVE FOR CONDUCTOR SIZES.)
- FERROUS MATERIAL TO BE GALVANISED TO B.S.729 AFTER FABRICATION.
- ASSEMBLY GENERALLY AS B.S.3288 PART 2. FIG. 74.
- M.F.L. 70kN.

TABLE 28 DIMENSIONS OF SUSPENSION CLAMP BODY & CLOSED TYPE STRAP FOR LINE & EARTH CONDUCTORS: KEEPER TYPE & CLOSED TYPE STRAP.								
CONDUCTOR	MINIMUM FAILING LOAD	A	ØB	C	D	F	G	L
mm	kN	mm	mm	mm	mm	mm	mm	mm
13 TO 24	70	127	17.5	12	25	50	-	(250)
24 TO 34	95	127	21.5	16	(27.5)	(55)	(52)	(290)
34 TO 38	125	(165)	21.5	20	(27.5)	(55)	(60)	(300)

CE Electric UK		Lloyds Court, 78 Grey Street, Newcastle Upon Tyne, NE1 6AF		
Manufacturer Details		PIVOTED TYPE CONDUCTOR SUSPENSION CLAMP TONGUE ENDED PATTERN ALUMINIUM CONDUCTOR ONLY		
Sheet No. 1	Scale N.T.S.			
Prepared By Joan.Oakley	Grid Reference	Type OVERHEAD	LINES	
Revised 04/08/09	Date Issued 04/08/09	Ref No. C977837	Historic Drg.No.	1091010498
Checked By G HAMMEL		Revision	Notes	