



POLE SIZE TO BE IMPRESSED  
ON POLE BUTT

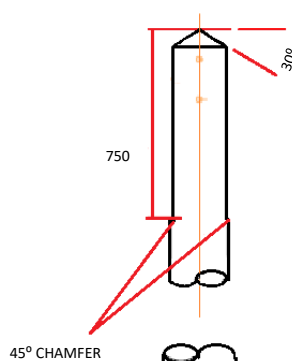

SCARFING TO BE CUT TO GIVE  
A 50mm FACE ON BOTH FACES  
OF POLE AND THE END  
CHAMFERED OFF BEYOND  
THE LENGTH SHOWN

45° CHAMFER

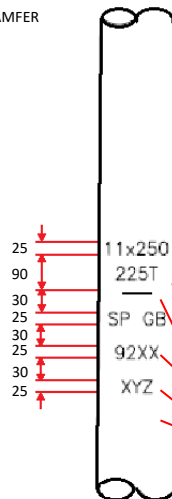

MARKING GENERALLY AS BS1990

1. LENGTH AND DIAMETER OR CLASS AT 1500mm
2. CHARACTERS TO BE GOUGED OR BRANDED 5mm WIDE, 3mm DEEP AND 25mm HIGH AS A MINIMUM
3. POLE TOP DIAMETER
4. TIMBER SPECIES, COUNTRY OF ORIGIN
5. YEAR OF PRESERVATION AND CHARGE No.
6. INITIALS OF SUPPLIER

NOTES:-

1. ALL DIMENSIONS ARE IN MILLIMETERS, UNLESS OTHERWISE SHOWN
2. ALL POLE DRILLINGS ABOVE GROUND LEVEL WHICH ARE NOT USED, MUST BE PLUGGED WITH APPROVED WOOD POLE PLUGS

| POLE LENGTH (m) | DIM 'A' (m) |
|-----------------|-------------|
| 8.5 – 11.0      | 1.7         |
| 11.5 – 14.0     | 1.5         |
| 15.0 – 17.0     | 1.3         |
| 18.0 – 24.0     | 1.1         |

**nationalgrid**

KK POLE FABRICATION DRAWING

DRG. & ISSUE

NG-KK-001

1